

CB MARINE STORM VALVE

Marine Flange Cast Steel Storm Valve
CB/T3475-92 Type A/AS

ISO9001 Supplier

Class Certificate

Export Supply

Marine Bronze/Cast Steel Storm Valve is used in the fresh water, sea water or sewage pipe system. Design Standard: CB/T3475-92 Flange Standard: GB569 or GB2501 Test and Inpsection Standard: GB600 ...



Key Highlights

Category	CB Marine Storm Valve
Standard	GB
Material	Cast Steel
Weight / Size	Body--Cast Steel / Bronze Bonnet--Cast Steel / Bronze Disc--Bronze Gland...
Certificate	CCS, BV, DNV, LR, ABS, NK,IRS, RMRS, GL

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	CB Marine Storm Valve	Model / SKU	Marine-Flange-Cast-Steel-Storm-Valve-CB-T3475-92-Type-A-AS
Standard	GB	Material	Cast Steel
Weight / Size	Body--Cast Steel / Bronze Bonnet--Cast Steel / Bronze Disc--Bronze Gland--Brass Main Size(mm):	Certificate	CCS, BV, DNV, LR, ABS, NK,IRS, RMRS, GL
Warranty	12 Months unless specified otherwise	Origin	China


CONTENTS

- China Marine Flange Cast Steel Storm Valve CB/T3475-92 Type A/AS:

■ Main Parts & Material:
- Technical Data:

■ Main Size(mm):

China Marine Flange Cast Steel Storm Valve CB/T3475-92 Type A/AS:

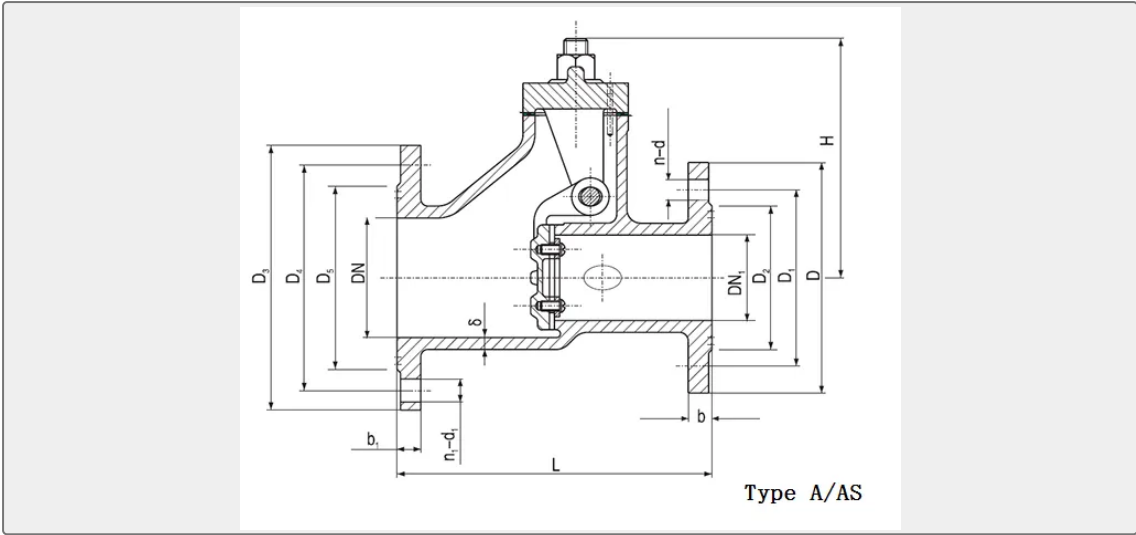

Marine Bronze/Cast Steel Storm Valve is used in the fresh water, sea water or sewage pipe system.

Design Standard: CB/T3475-92

Flange Standard: GB569 or GB2501

Test and Inspection Standard: GB600

Technical Data:

Type	Nominal Pressure (Mpa)	Nominal Diameter(mm)	Medium
A,AS	0.1	50~100	sea water, fresh water,sewage
B,BS	0.1	50~150	

Main Parts & Material:

Body--Cast Steel / Bronze

Bonnet--Cast Steel / Bronze

Disc--Bronze

Gland--Brass

Main Size(mm):

Type A/B:

no mi nal dia me ter	ex po rt dia me ter	structure dimension				Thickn ess δ		connecting dimation of inlet flange						bolt		connecting dimation of outlet flange						bolt		Weight(kg)			
		L		H				cast steel		bronz e																	
		A	B	A	B	ca st st ee l	br o n z e	D	D 1	D 2	b	d	n	T h.	D 3	D 4	D 5	b 1	d 1	n	T h.	A	B	A	B		
50	65	1 8 5	2 0 5	1 2 0	9 0	7. 5	5	1 3 5	1 0 3	8 4	1 4	1 5	6	M 1 4	1 5 5	1 2 3	1 0 4	1 4	1 5	6	M 1 4	8	9	8	9		
65	80	2 0 0	2 2 6	1 3 0	1 0 0	8	6	1 5 5	1 2 3	1 0 4	1 4	1 5	6	M 1 4	1 7 0	1 3 8	11 8	1 4	1 5	8	M 1 4	1 0	1 1	1 1	1 2		
80	100	2 2 6	2 6 0	1 5 0	1 2 0	8. 5	6	1 7 0	1 3 8	11 8	1 4	1 5	8	M 1 4	1 9 0	1 5 8	1 3 8	1 4	1 5	8	M 1 4	1 4	1 5	1 5	1 6		
100	125	2 5 0	3 0 0	1 7 5	1 4 0	9	6	1 9 0	1 5 8	1 3 8	1 4	1 5	8	M 1 4	2 1 5	1 8 3	1 6 4	1 4	1 5	1 0	M 1 4	2 3	2 4	2 4	2 3		
125	150	—	3 5 0	—	1 6 5	10	7	2 1 5	1 8 3	1 6 4	1 4	1 5	1 0	M 1 4	2 4 0	2 0 8	1 9 0	1 4	1 5	1 2	M 1 4	—	3 3	—	3 3		
150	175	—	3 7 0	—	1 7 0	11	7	2 4 0	2 0 8	1 9 0	1 4	1 5	1 2	M 1 4	2 7 0	2 3 8	2 2 1	1 5	1 5	1 2	M 1 4	—	3 5	—	3 8		

Type AS/BS:

no mi nal dia me ter	ex po rt dia me ter	structure dimension				Thickn ess δ		connecting dimation of inlet flange						bolt		connecting dimation of outlet flange						bolt		Weight(kg)			
		L		H																				cast steel		bronz e	
		A S	B S	A S	B S	ca st st ee l	br o n z e	D	D 1	D 2	b	d	n	T h.	D 3	D 4	D 5	b 1	d 1	n	T h.	A S	B S	A S	B S		
50	65	1 8 5	2 0 5	1 2 0	9 0	7. 5	5	1 4 0	11 0	9 0	1 6	1 4	4	M 1 2	16 0	13 0	11 0	1 6	1 4	4	M 1 2	8	9	8	9		
65	80	2 0 0	2 2 6	1 3 0	1 0 0	8	6	1 6 0	1 3 0	11 0	1 6	1 4	4	M 1 2	19 0	15 0	12 8	1 8	1 8	4	M 1 6	1 0	1 3	1 1	1 3		
80	100	2 2 6	2 6 0	1 5 0	1 2 0	8. 5	6	1 9 0	1 5 0	1 2 8	1 8	1 8	4	M 1 6	21 0	17 0	14 8	1 8	1 8	4	M 1 6	1 5	1 8	1 6	1 9		

10 0	12 5	2 5 0	3 0 0	1 7 5	1 4 0	9	6	2 1 0	1 7 0	1 4 8	1 8	1 8	4	M 1 6	24 0	20 0	17 8	2 0	1 8	8	M 1 6	2 5	2 7	2 6	2 8
12 5	15 0	–	3 5 0	–	1 6 5	10	7	2 4 0	2 0 0	1 7 8	2 0	1 8	8	M 1 6	26 5	22 5	20 2	2 0	1 8	8	M 1 6	–	4 1	–	4 1
15 0	17 5	–	3 7 0	–	1 7 0	11	7	2 6 5	2 2 5	2 0 2	2 0	1 8	8	M 1 6	29 5	25 5	23 2	2 2	1 8	8	M 1 6	–	5 0	–	5 1