

DIN 81958/89159 CABLE


MGG Ship Power Cable without Screen 0.6/1kv

ISO9001 Supplier

Class Certificate

Export Supply

Reliable Marine Cable Supplier and Stockist, MGG and MGH Type; Cheap Price and Fast Delivery. Your also can find other other marine cable here.

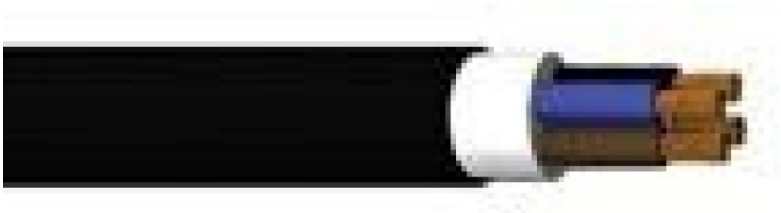

Key Highlights

|               |                                                 |
|---------------|-------------------------------------------------|
| Category      | DIN 81958/89159 Cable                           |
| Standard      | DIN                                             |
| Material      | Tinned Copper/EPR insulation/Polyolefin sheath  |
| Weight / Size | IEC 60332-3-22 DIN 89160/98 Cores & Size Cores: |
| Certificate   | ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS         |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

|               |                                                 |             |                                                |
|---------------|-------------------------------------------------|-------------|------------------------------------------------|
| Category      | DIN 81958/89159 Cable                           | Model / SKU | MGG-Ship-Power-Cable-without-Screen-0-6-1kv    |
| Standard      | DIN                                             | Material    | Tinned Copper/EPR insulation/Polyolefin sheath |
| Weight / Size | IEC 60332-3-22 DIN 89160/98 Cores & Size Cores: | Certificate | ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS        |
| Warranty      | 12 Months unless specified otherwise            | Origin      | China                                          |

CONTENTS

- China MGG Ship Power Cable without Screen 0.6/1kv:
  - Cable Construction
  - Cores & Size
- Technical Specification:
  - Standards
  - Core Identification:

## China MGG Ship Power Cable without Screen 0.6/1kv:



MGG Cable is shipboard power cable without screen, voltage is 0.6/1KV, used for power and lighting in shipbuilding and ship repairing. We can delivery to everywhere according to INCOTERMS 2010.

### Technical Specification:

#### Cable Construction

Conductor: Tinned copper, class 2.

Insulation: EPR Insulation.

Bedding: Tape

Outer Sheath: Halogen-free Polyolefin(SHF1)

#### Standards

IEC 60092-351; IEC 60092-353; IEC 60092-359; IEC 60332-3-22

DIN 89160/98

#### Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

#### Core Identification:

1 core: natural colour

2 cores: black / blue

3 cores: black / blue / brown

4 cores: black / blue / brown / black

5 cores: black / blue / brown / black / black

7 to 24 cores: printed with numbers