

MARINE TOOLS

MXTD Series-Drive Torque Wrench

MXTD Series-Drive Torque Wrench Aviation aluminum titanium alloy and integrated design ensure its wide applicability. The maximum working pressure is 70MPa,with advanced precision ratc...

ISO9001 Supplier

Class Certificate

Export Supply



jinbomarine.com

Key Highlights


Category	Marine Tools
Standard	DIN
Weight / Size	Model 1MXTD 3MXTD 5MXTD 8MXTD 10MXTD 15MXTD 20MXTD 25MXTD 35MXTD 45MXT...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Marine Tools	Model / SKU	MXTD-Series-Drive-Torque-Wrench
Standard	DIN	Weight / Size	Model 1MXTD 3MXTD 5MXTD 8MXTD 10MXTD 15MXTD 20MXTD 25MXTD 35MXTD 45MXTD 50MXTE 95MXTD Nm) 185 436 779 1072 1553 2050 2617 3493 4963 5912 7032 14085 Torque 1852 4364 7789 10715 15528 20501 26171 34928 49627 59123 70315 140848 (Kg)Weight 2.7 4.8 8.8 12 14.5 19 25 37.5 44 63 89 155 L1 138 168 207 226 250 281 304 331 390 412 418 520 L2 194 244 296 326 366 402 442 483 558 570 596 758 L3 63 79 99 110 120 132 146 158 177 188 195 246 H1 50 70 80 90 100 112 120 138 150 163 166 210 H2 73 99 124 133 143 165 183 202 219 229 236 307 H3 96 125 152 170 186 208 226 250 282 288 300 415 H4 140 165 193 211 227 249 267 291 323 332 366 473 R1 26 34 40 46 50 56 60 66 77 80 82 115 R2 107 132 162 178 199 218 240 260 298 303 325 400 Square Drive 3/4' 1 1- 1/2' 1-1/2' 1-1/2' 2' 2-1/2' 2-1/2' 2- 1/2' 2-1/2' 3' 4'
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China MXTD Series-Drive Torque Wrench:

MXTD Series-Drive Torque Wrench

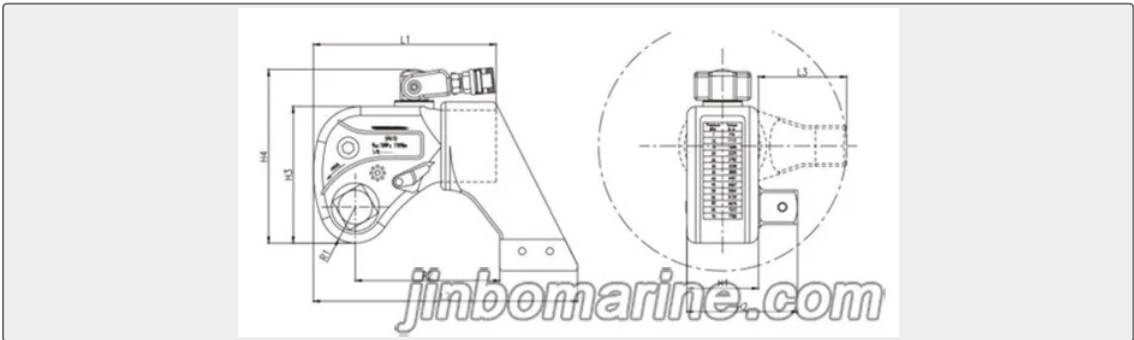

Aviation aluminum titanium alloy and integrated design ensure its wide applicability.

The maximum working pressure is 70MPa,with advanced precision ratchet drive, the output torque repeatability is as high as $\pm 3\%$.

360°x180°rotatable oil pipe joint, wide range of use.

The trigger button can place the 360°fine-tuning reaction arm on any pivot.

The design of the direct drive shaft can quickly switch the tightening and disassembling state.

Lock drive shaft can be customized according to customer requirements.

The torque from 185 to 15000oNm has 12 models, the most complete specifications, and the most widely covered products.

Type selection table of MXTD series hydraulic torque wrench:

Model	1MXTD	3MXTD	5MXT D	8MXTD	10MXT D	15MXT D	20MXT D	25MXT D	35MX TD	45MX TD	50MX TE	95M XT D
Nm)	185	436	779	1072	1553	2050	2617	3493	4963	5912	7032	140 85
Torque	1852	4364	7789	10715	15528	20501	26171	34928	49627	59123	70315	140 848
(Kg) Weight	2.7	4.8	8.8	12	14.5	19	25	37.5	44	63	89	155
L1	138	168	207	226	250	281	304	331	390	412	418	520
L2	194	244	296	326	366	402	442	483	558	570	596	758
L3	63	79	99	110	120	132	146	158	177	188	195	246
H1	50	70	80	90	100	112	120	138	150	163	166	210
H2	73	99	124	133	143	165	183	202	219	229	236	307
H3	96	125	152	170	186	208	226	250	282	288	300	415
H4	140	165	193	211	227	249	267	291	323	332	366	473
R1	26	34	40	46	50	56	60	66	77	80	82	115
R2	107	132	162	178	199	218	240	260	298	303	325	400
Square Drive	3/4'	1	1-1/2'	1-1/2'	1-1/2'	2'	2-1/2'	2-1/2'	2-1/2'	2-1/2'	3'	4'