

MARINE TOOLS


Non-Sparking Flare Nut Open Ring Wrench

These Non-Sparking Flare Nut Open Ring Wrench are made of Aluminum Bronze and Beryllium Copper, it is a high quality grade beryllium copper alloy material and a standard grade aluminum-bronze alloy. Thes...

ISO9001 Supplier

Class Certificate

Export Supply

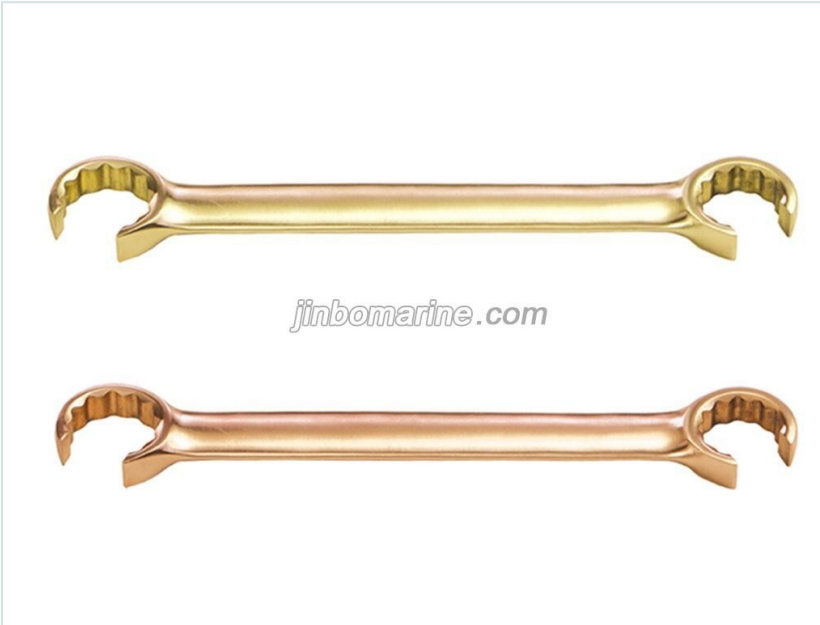


Key Highlights

Category	Marine Tools
Standard	EN
Material	Aluminum Bronze, Beryllium Copper
Weight / Size	S1*S2 mm L mm Weight (g) Aluminum Bronze Beryllium Copper 6*7 95 15 17 8...
Certificate	EACC, IAF
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications			
Category	Marine Tools	Model / SKU	Non-Sparking-Flare-Nut-Open-Ring-Wrench
Standard	EN	Material	Aluminum Bronze, Beryllium Copper
Weight / Size	S1*S2 mm L mm Weight (g) Aluminum Bronze Beryllium Copper 6*7 95 15 17 8*10 115 29 32 9*11 125 34 37 10*12 140 48 55 12*14 145 62 70 14*15 155 80 90 16*18 165 90 100 14*17 170 115 127 17*19 185 120 132 19*22 200 165 180 22*24 220 215 240 24*27 255 288 320 24*30 270 340 375 25*28 265 345 380 27*30 280 389 430 30*32 295 450 498 30*34 310 535 588 30*36 330 595 657 34*36 345 685 758 36*41 365 845 935	Certificate	EACC, IAF
Warranty	12 Months unless specified otherwise	Origin	China

China Non-Sparking Flare Nut Open Ring Wrench:

These Non-Sparking Flare Nut Open Ring Wrench are made of Aluminum Bronze and Beryllium Copper, it is a high quality grade beryllium copper alloy material and a standard grade aluminum-bronze alloy. These tools are non-magnetic and non-corrosion, very suitable used for LPG and LNG vessels, and oil-gas industry etc.

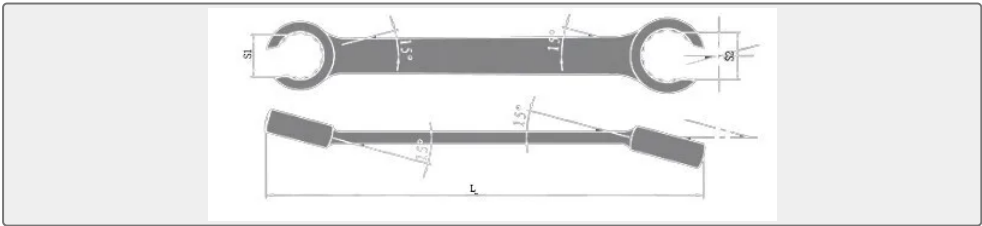

S1*S2 mm	L mm	Weight (g)	
		Aluminum Bronze	Beryllium Copper
6*7	95	15	17
8*10	115	29	32
9*11	125	34	37
10*12	140	48	55
12*14	145	62	70
14*15	155	80	90

16*18	165	90	100
14*17	170	115	127
17*19	185	120	132
19*22	200	165	180
22*24	220	215	240
24*27	255	288	320
24*30	270	340	375
25*28	265	345	380
27*30	280	389	430
30*32	295	450	498
30*34	310	535	588
30*36	330	595	657
34*36	345	685	758
36*41	365	845	935