

MARINE DECK COVERING


Open Deck Covering

Main Specification No. Item name Index Standard 1 Initial setting time ≥1h...

ISO9001 Supplier

Class Certificate

Export Supply

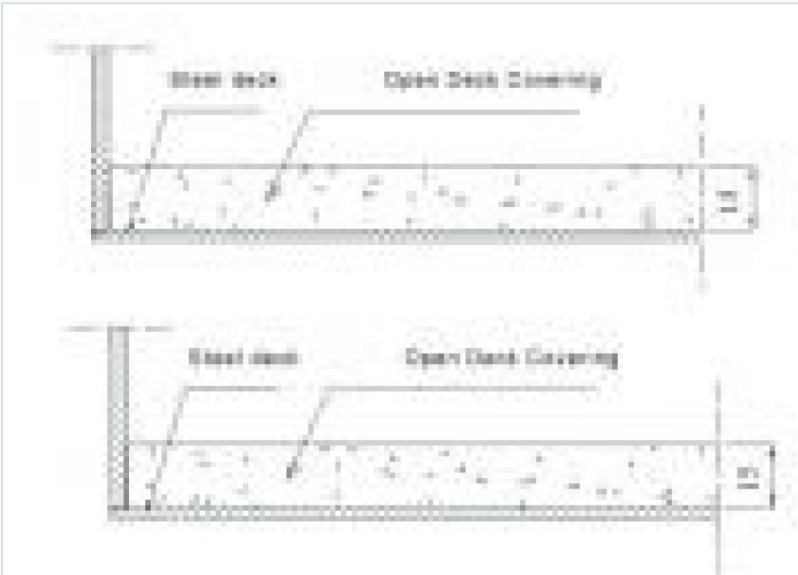

Key Highlights

Category	Marine Deck Covering
Standard	EN
Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Initial setting time ≥1h Q/HCF1-2004 2 Final ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Marine Deck Covering	Model / SKU	Open-Deck-Covering
Standard	EN	Material	Dry material (A component):
Weight / Size	Item name Index Standard 1 Initial setting time ≥1h Q/HCF1-2004 2 Final setting time ≤12h 3 Modulus of rapture ≥5MPa 4 Compressive strength ≥10MPa 5 Density ≤2000kg/m3 6 Water absorption ≤10% 7 Oil absorption ≤5% 8 Heat conductivity -30~70℃ 9 Not readily ignitability, smoke & toxicity ≤35kg/15mm/m2 10 Weight per square meter Feature Characteristic:	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

■ Main Specification

■ Feature

■ Consume amount:

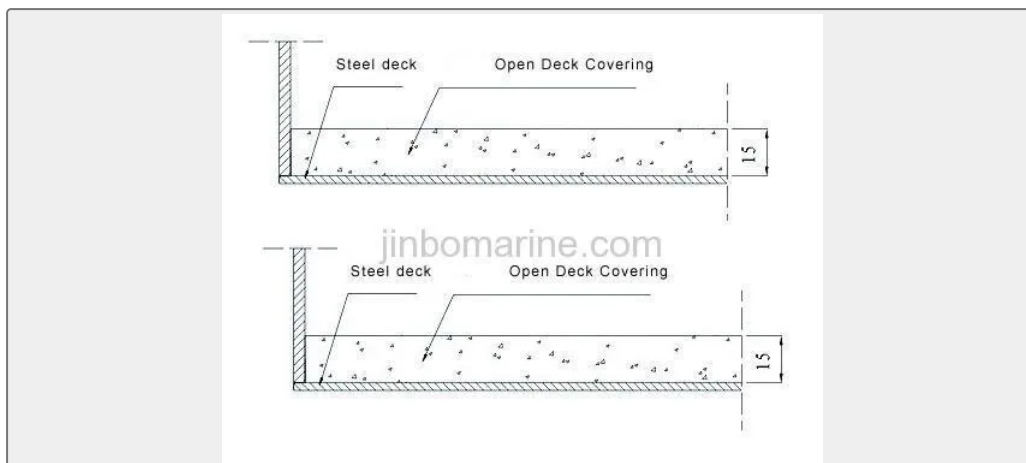**Main Specification**

No.	Item name	Index	Standard
1	Initial setting time	≥1h	Q/HCF1-2004
2	Final setting time	≤12h	
3	Modulus of rupture	≥5MPa	
4	Compressive strength	≥10MPa	
5	Density	≤2000kg/m ³	
6	Water absorption	≤10%	
7	Oil absorption	≤5%	
8	Heat conductivity	-30~70℃	
9	Not readily ignitability, smoke & toxicity	≤35kg/15mm/m ²	
10	Weight per square meter		

Feature**Characteristic:** Abrasion resistance, heat insulation, low line shrinkage**Applied:** Covering for open deck (outdoor and wheelhouse top)**Consume amount:**35 kg/m²**Packing:** Dry material (A component): 30kg/pack; Liquid(B component): 9kg/barrel**Storage:** Cool and dry place, moisture-proof, the quality guarantee period is 6 months