

MARINE LADDER

Pilot Ladder with Type Approval Certificate

ISO9001 Supplier

Class Certificate

Export Supply

Design Standard: CB/T3142-94, ISO799-2004, IMO A.889(21), JIS F2615-1982, SOLAS 1983 REVISION Pilot Ladder is used for the pilot to embark a ship or go aboard Good Quality With DNV type approval certificate ...



Key Highlights

Category	Marine Ladder
Standard	JIS
Material	Wood
Weight / Size	Rubber Main Size List(mm):
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Marine Ladder	Model / SKU	Pilot-Ladder-with-Type-Approval-Certificate
Standard	JIS	Material	Wood
Weight / Size	Rubber Main Size List(mm):	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Pilot Ladder with Type Approval Certificate:
- Main Material:
- Main Size List(mm):

China Pilot Ladder with Type Approval Certificate:

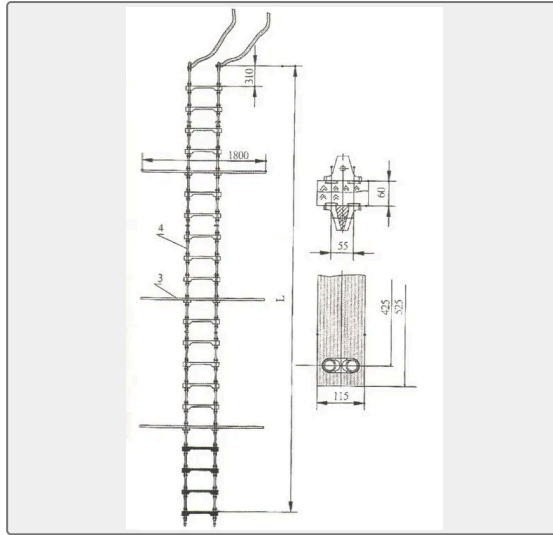

Design Standard: CB/T3142-94, ISO799-2004, IMO A.889(21), JIS F2615-1982, SOLAS 1983 REVISION

Pilot Ladder is used for the pilot to embark a ship or go aboard

Good Quality With DNV type approval certificate

Main Material:

Step: Hard Wood

Twist prevention board: Hard Wood

Rope: Manila Rope

Timble: plastic and steel/stainless steel

Bottom four pcs of step: Rubber

Main Size List(mm):

No of Step	No of twist prevention board	prevention board place	L(mm)	L1(mm)	Weight(kg)
6	1	the 5th board	1860	1550	22
7			2170	1860	25
8			2480	2170	28
9			2790	2480	31
10			3100	2790	34
11			3410	3100	37
12			3720	3410	40
13			4030	3720	43

14	2	the 5th and 12th boards	4340	4030	52
15		the 5th and 13th boards	4650	4340	55
16		the 5th and 14th boards	4960	4650	58
17			5270	4960	61
18			5580	5270	64
19			5890	2280	67
20			6200	5890	70
21			6510	6200	73
22			6820	6510	76
23	3	the 5th,14th and 21st boards	7130	6820	86
24		the 5th,14th and 22nd boards	7440	7130	89
25		the 5th,14th and 23rd boards	7750	7440	92
26			8060	7750	95
27			8670	8060	98
28			8680	8370	101
29			8990	8680	104
30			9300	8990	107

When the customer order, the length must be supplied.