

CHAIN SLING

Pressed Steel Wire Rope Sling

VAF06-L V-teel wite rope sling A-----Pressed type (with straight aluminium ferrule without thimble) F-----Steel wire rope cope(F-FC , W-IWRC) 06-----Steel wire rope core diameter ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Material	Galvanized Steel Wire Rope
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Chain Sling	Model / SKU	Pressed-Steel-Wire-Rope-Sling
Standard	EN	Material	Galvanized Steel Wire Rope
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China Pressed Steel Wire Rope Sling:

VAF06-L

V- teel wite rope sling

A----- Pressed type (with straight aluminium ferrule without thimble)

F----- Steel wire rope cope(F-FC , W-IWRC)

06-----Steel wire rope core diameter

L----- fective length of steel wire rope

The specification of the steel wire rope used by the following working load in the table:

Dia6mm-60mm use the construction of 6*37(b)-1670


Dia 62mm-120mm use the construction of 8*61(b)-1670

Dia 122mm-190mm use the construction of 8*91(ab)-1670

Different construction of the rope means different working load,we can calculate the working load with the steel wire rope construction that the customer required.

The sling's breaking load is 5 times of its working load .

The pressed type for the rope with dia 90mm is pressed two aluminium ferrule on each end of the sling.

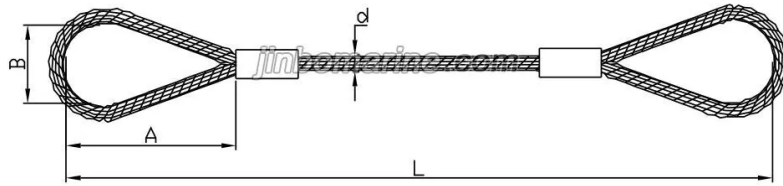

Products type		Dia of rope(d) (mm)	Working load limit		Approx. eye Ength A (mm)
FC	IWR		kN	kN	
VAF06	VBW06	6	3.2	3.4	180
VAF07	VBW07	7	4.3	4.7	190
VAF08	VBW08	8	5.7	6.1	210
VAF09	VBW09	9	7.2	7.8	230
VAF10	VBW10	10	8.9	6.9	230
VAF11	VBW11	11	11	12	250
VAF12	VBW12	12	13	14	260
VAF13	VBW13	13	15	16	260
VAF14	VBW14	14	17	19	280
VAF16	VBW16	16	23	24	320
VAF18	VBW18	18	29	31	360
VAF20	VBW20	20	35	38	400
VAF22	VBW22	22	43	46	440
VAF24	VBW24	24	51	55	480
VAF26	VBW26	26	60	65	520
VAF28	VBW28	28	69	75	560
VAF30	VBW30	30	80	86	600
VAF32	VBW32	32	91	98	640

VAF34	VBW34	34	102	110	680
VAF36	VBW36	36	115	124	720
VAF38	VBW38	38	128	138	760
VAF40	VBW40	40	142	153	800
VAF42	VBW42	42	157	169	840
VAF44	VBW44	44	172	185	880
VAF46	VBW46	46	187	203	920
VAF48	VBW48	48	203	220	960
VAF50	VBW50	50	221	240	1000
VAF52	VBW52	52	239	259	1040
VAF54	VBW54	54	258	279	1080
VAF56	VBW56	56	277	301	1120
VAF58	VBW58	58	298	322	1160
VAF60	VBW60	60	319	345	1200

