

MARINE FAIRLEAD

Saint Lawrence Fairlead

 St.Lawrence fairlead Provide CCS , BV , LR , BV etc Certificate Customized service is available, Advanced equipment ,Strong consciousness in controlling quality Material:ZG230-450,Q235 ...

ISO9001 Supplier

Class Certificate

Export Supply




Key Highlights

Category	Marine Fairlead
Standard	JIS
Material	steel
Weight / Size	Diameter of Roller L H B B1 Weight Diameter of Cable(mm) (D1) (mm) (mm) ...
Certificate	ABS , BV, CCS, mill certificate etc.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Fairlead	Model / SKU	Saint-Lawrence-Fairlead
Standard	JIS	Material	steel
Weight / Size	Diameter of Roller L H B B1 Weight Diameter of Cable(mm) (D1) (mm) (mm) (mm) (mm) (KG) Tightwire Nylon Rope SLF-001 140mm 826 810 275 150 485 19.5 36 SLF-002 160mm 920 937 340 200 752 22.5 4 SLF-003 190mm 1002 1040 380 230 1080 26 45 SLF-004 200mm 1077 1119 435 255 1426 32.5 70	Surface	St.Lawrence fairlead Provide CCS , BV , LR , BV etc Certificate Customized service is available, Advanced equipment ,Strong consciousness in controlling quality Material:ZG230-450,Q235 Surface:
Certificate	ABS , BV, CCS, mill certificate etc.	Warranty	12 Months unless specified otherwise
Origin	China		

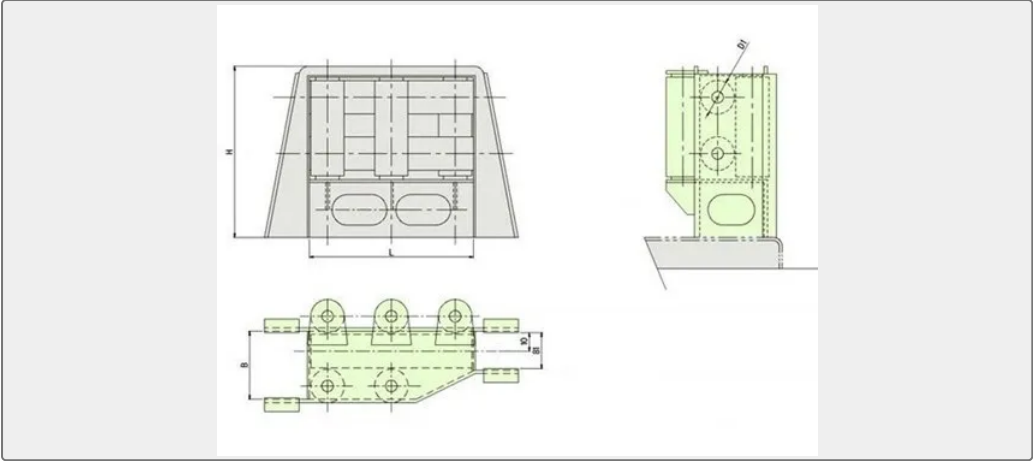

St.Lawrence fairlead

Provide CCS , BV , LR , BV etc Certificate

Customized service is available, Advanced equipment ,Strong consciousness in controlling quality

Material:ZG230-450,Q235

Surface: Blasting,Epoxy.

Machining facilities :CNC center, CNC lathes, ultrasonic wave cleaning,etc

Good wear and corrosion resistance

We can supply fairlead, roller according to JISF, DIN and GB standards. We can also make these products according to buyer's drawings.

Saint lawrence fairlead CB3139-1983								
Product No.	Diameter of Roller	L	H	B	B1	Weight	Diameter of Cable(mm)	
	(D1)	(mm)	(mm)	(mm)	(mm)	(KG)	Tightwire	Nylon Rope
SLF-001	140mm	826	810	275	150	485	19.5	36
SLF-002	160mm	920	937	340	200	752	22.5	4
SLF-003	190mm	1002	1040	380	230	1080	26	45
SLF-004	200mm	1077	1119	435	255	1426	32.5	70