

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

SHACKLE

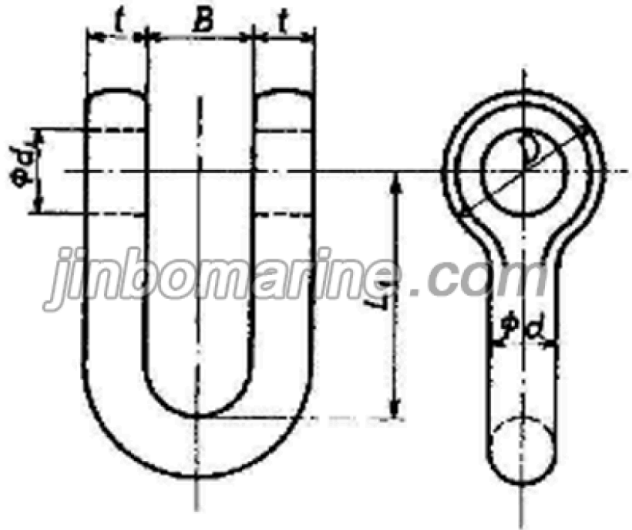
SB Type JIS B2801 Straight Shackle

SB Type JIS B2801 Straight Shackle Nominal Size t d B D d1 L Weigh...

ISO9001 Supplier

Class Certificate

Export Supply

**Key Highlights**

| | |
|---------------|---|
| Category | Shackle |
| Standard | JIS |
| Weight / Size | SB Type JIS B2801 Straight Shackle Nominal Size t d B D d1 L Weight(kg) ... |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

| Technical Specifications | | | |
|--------------------------|--|---------------|---|
| Category | Shackle | Model / SKU | SB-Type-JIS-B2801-Straight-Shackle |
| Standard | JIS | Weight / Size | SB Type JIS B2801 Straight Shackle Nominal Size t d B D d1 L Weight(kg) 10 10 12 17 25 13 40 0.15 12 12 14 20 32 16 48 1.31 14 14 16 24 36 18 56 0.49 16 16 18 26 40 20 64 0.74 18 18 21 29 45 22 72 1.23 20 20 23 31 50 25 80 1.33 22 22 26 34 55 27 88 1.53 24 24 28 39 62 31 96 1.74 26 26 30 41 66 33 104 2.48 28 28 32 43 70 35 112 2.49 30 30 34 45 75 37 120 4.6 32 32 37 48 80 39 128 6.18 34 34 39 50 85 41 136 7.61 36 36 42 54 90 43 144 9.35 38 38 44 57 95 47 152 10.98 40 40 47 60 100 49 160 12.15 42 42 49 63 105 53 168 14.27 44 44 51 66 110 56 176 16.11 46 46 53 68 115 58 184 18.19 48 48 55 72 120 60 192 20.14 50 50 57 75 125 62 200 21.88 55 55 62 83 138 67 220 29.5 60 60 69 90 150 72 240 41.24 65 65 75 98 164 79 260 50.75 70 70 81 105 178 85 280 60.41 75 75 87 112 192 92 300 76.76 80 80 93 120 206 98 320 93.19 85 85 99 128 220 104 340 112.48 90 90 104 135 232 110 360 131.73 Unit: |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | Warranty | 12 Months unless specified otherwise |
| Origin | China | | |

CONTENTS

- SB Type JIS B2801 Straight Shackle
- JIS B2801 Shackle Type
- JIS Shackle Working Load Limit, Proof Force

SB Type JIS B2801 Straight Shackle

| Nominal Size | t | d | B | D | d1 | L | Weight(kg) |
|--------------|----|----|----|----|----|----|------------|
| 10 | 10 | 12 | 17 | 25 | 13 | 40 | 0.15 |
| 12 | 12 | 14 | 20 | 32 | 16 | 48 | 1.31 |

| | | | | | | | |
|----|----|-----|-----|-----|-----|-----|--------|
| 14 | 14 | 16 | 24 | 36 | 18 | 56 | 0.49 |
| 16 | 16 | 18 | 26 | 40 | 20 | 64 | 0.74 |
| 18 | 18 | 21 | 29 | 45 | 22 | 72 | 1.23 |
| 20 | 20 | 23 | 31 | 50 | 25 | 80 | 1.33 |
| 22 | 22 | 26 | 34 | 55 | 27 | 88 | 1.53 |
| 24 | 24 | 28 | 39 | 62 | 31 | 96 | 1.74 |
| 26 | 26 | 30 | 41 | 66 | 33 | 104 | 2.48 |
| 28 | 28 | 32 | 43 | 70 | 35 | 112 | 2.49 |
| 30 | 30 | 34 | 45 | 75 | 37 | 120 | 4.6 |
| 32 | 32 | 37 | 48 | 80 | 39 | 128 | 6.18 |
| 34 | 34 | 39 | 50 | 85 | 41 | 136 | 7.61 |
| 36 | 36 | 42 | 54 | 90 | 43 | 144 | 9.35 |
| 38 | 38 | 44 | 57 | 95 | 47 | 152 | 10.98 |
| 40 | 40 | 47 | 60 | 100 | 49 | 160 | 12.15 |
| 42 | 42 | 49 | 63 | 105 | 53 | 168 | 14.27 |
| 44 | 44 | 51 | 66 | 110 | 56 | 176 | 16.11 |
| 46 | 46 | 53 | 68 | 115 | 58 | 184 | 18.19 |
| 48 | 48 | 55 | 72 | 120 | 60 | 192 | 20.14 |
| 50 | 50 | 57 | 75 | 125 | 62 | 200 | 21.88 |
| 55 | 55 | 62 | 83 | 138 | 67 | 220 | 29.5 |
| 60 | 60 | 69 | 90 | 150 | 72 | 240 | 41.24 |
| 65 | 65 | 75 | 98 | 164 | 79 | 260 | 50.75 |
| 70 | 70 | 81 | 105 | 178 | 85 | 280 | 60.41 |
| 75 | 75 | 87 | 112 | 192 | 92 | 300 | 76.76 |
| 80 | 80 | 93 | 120 | 206 | 98 | 320 | 93.19 |
| 85 | 85 | 99 | 128 | 220 | 104 | 340 | 112.48 |
| 90 | 90 | 104 | 135 | 232 | 110 | 360 | 131.73 |

Unit: mm

JIS B2801 Shackle Type



JIS Shackle Working Load Limit, Proof Force



