

MARINE CONSERVATION


Screw-down Valve Control System

In accordance with SOLAS, the valve operation mechanism of Fore Peak Ballast Tanker inner side Installed Screw-down valve is changed from previous piston type and/or rack & pinion liner type to screw down type. The ...

ISO9001 Supplier

Class Certificate

Export Supply

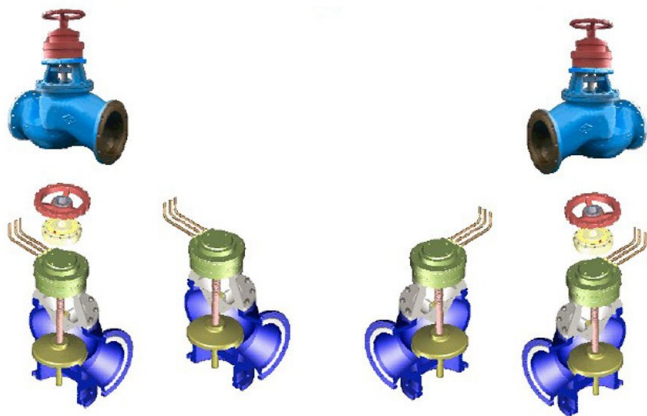

Key Highlights

Category	Marine Conservation
Standard	EN
Material	Technical Specification Valve body material:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications

Category	Marine Conservation	Model / SKU	Screw-down-Valve-Control-System
Standard	EN	Material	Technical Specification Valve body material:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China Screw-down Valve Control System:
- Project
- Technical Specification

China Screw-down Valve Control System:

In accordance with SOLAS, the valve operation mechanism of Fore Peak Ballast Tanker inner side Installed Screw-down valve is changed from previous piston type and/or rack & pinion liner type to screw down type. The multi-turn hydraulic actuator is our company s independent research and development of such functional production. The device can be working in the condition of salt spray, mist, mold, shock, vibration and other working environment.

Technical Specification

Valve body material: QT50-10

Piston material: 40Cr

Working pressure: 8~12MPa

Max pressure: 36MPa

Discharge: 0.598L/r

Pipe connection: $\Phi 10$, $\Phi 12$, $\Phi 16$

Valve position indication type: Open/close

Environmental temperature: $-40^{\circ}\text{C}\sim+120^{\circ}\text{C}$

Project

