

ALARM INDICATOR SYSTEM

SGF-6/7/8 Alarm Indication

SGF-6/7/8 Alarm Indication Power supply:SGF-6/7/8: DC24V -25% +30% SGF-6A/7A/8A: AC220V±10% Color: Black (RAL9005) IP class:IP20/44 Weight:1.6/2.2Kg Power:5W...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Alarm Indicator System
Standard	EN
Weight / Size	Black (RAL9005) IP class:IP20/44 Weight:1.6/2.2Kg Power:5W Stuffing box c...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS



We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Alarm Indicator System	Model / SKU	SGF-6-7-8-Alarm-Indication
Standard	EN	Weight / Size	Black (RAL9005) IP class:IP20/44 Weight:1.6/2.2Kg Power:5W Stuffing box cable entrance hole size:2-Φ18mm General emergency alarm, telegraph signal, telephone call,engine fault, CO2, release alarm, fire alarm, dead man alarmand water mist alarm Mode ofcommunication:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China SGF-6/7/8 Alarm Indication:

SGF-6/7/8 Alarm Indication

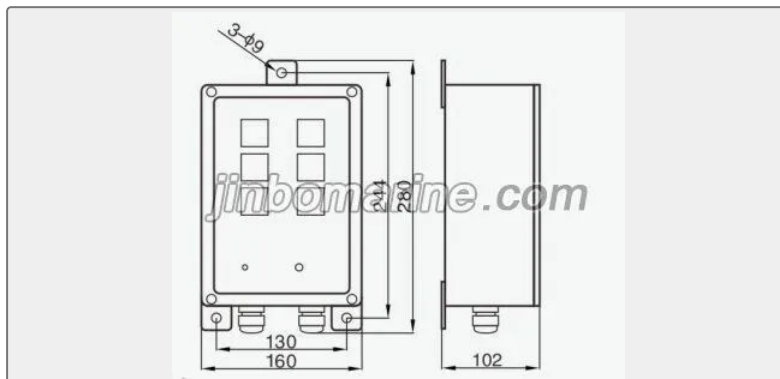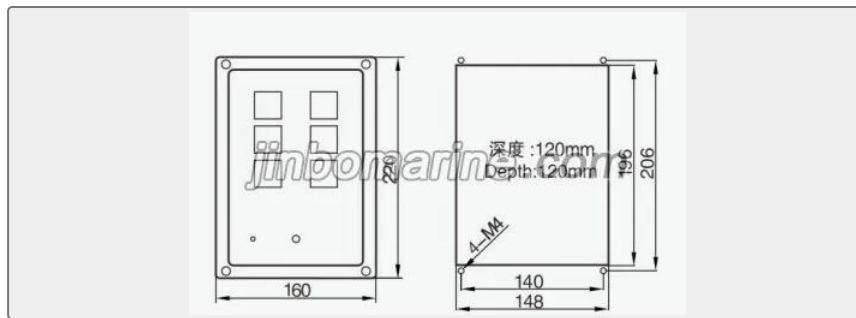

Power supply:SGF-6/7/8: DC24V -25% +30%

SGF-6A/7A/8A: AC220V±10%

Color: Black (RAL9005)

IP class:IP20/44

Weight:1.6/2.2Kg

Power:5W

Stuffing box cable entrance hole size:2-Φ18mm

General emergency alarm, telegraph signal, telephone call,engine fault, CO2, release alarm, fire alarm, dead man alarm and water mist alarm

Mode of communication: Serial communication

Alarm signal loudness:70dB ~ 90dB

Telephone call:600Hz/12100Hz Conversion alarm tone

Telegraph alarm: 600Hz Intermittent alarm tone

Main engine fault: 800Hz/1000Hz Conversion alarm tone

General emergency alarm: 1000Hz Seven short and one long alarm tone

CO2 Release alarm:1000Hz Continuous alarm tone

Fire alarm: 500~1200Hz Continuous FM alarm tone

Dead man alarm: 500~1000Hz Intermittent FM alarm tone in equal changes

Water mist alarm:600Hz Continuous alarm tone