BRIDGE NAVIGATIONAL WATCH ALARM SYSTEM

# SK-189 Infrared Detector

SK-189 Infrared Detector Working voltage: DC9-15V Mounting height: 2.4m-4.8m Detected range: diameter 4.6m*1.4m(mounting height is 2.4m ) Detect angle: 360 degrees Alarm ...

ISO9001 Supplier

Class Certificate

Export Supply




## Key Highlights

| | |
|---|---|
| **Category** | Bridge Navigational Watch Alarm System |
| **Standard** | EN |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications

| | | | |
|---|---|---|---|
| **Category** | Bridge Navigational Watch Alarm System | **Model / SKU** | SK-189-Infrared-Detector |
| **Standard** | EN | **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |
| **Warranty** | 12 Months unless specified otherwise | **Origin** | China |

## China SK-189 Infrared Detector:

SK-189 Infrared Detector

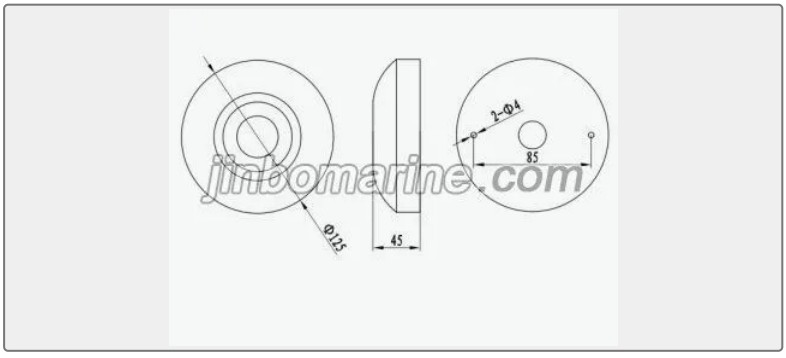

Working voltage: DC9-15V

Mounting height: 2.4m-4.8m

Detected range: diameter 4.6m*1.4m(mounting height is 2.4m )

Detect angle: 360 degrees

Alarm output: normally closed/normally open is optional

Protection class: IP20