HOSE CRIMPING MACHINE

SK100 Numeric Control Locking Pipe Machine

ISO9001 Supplier

Class Certificate

Export Supply

Main technical character Hooping steel wire rubber tube inner diameter:φ4 ~ φ51IVmm Industry tube inner diameter:89mmat the most Scale precision:0.01mm Power:4KW Voltage:380V The maximum...



Key Highlights

Category	Hose Crimping Machine
Standard	EN
Material	Main technical character Hooping steel wire rubber tube inner diameter:φ...
Weight / Size	Main technical character Hooping steel wire rubber tube inner diameter:φ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Hose Crimping Machine	**Model / SKU**	SK100-Numeric-Control-Locking-Pipe-Machine
Standard	EN	**Material**	Main technical character Hooping steel wire rubber tube inner diameter:φ4 ~ φ51IVmm Industry tube inner diameter:89mmat the most Scale precision:0.01mm Power:4KW Voltage:380V The maximum hooping force:252 tons Rotated speed:1440r/min Oil pump displacement:10ml/rad Dimension:858×910×1550（mm） Weight:800Kg The maximum opening diameter:+68mm SK-100 type numerical control tube locking machine structure diagram:
Weight / Size	Main technical character Hooping steel wire rubber tube inner diameter:φ4 ~ φ51IVmm Industry tube inner diameter:89mmat the most Scale precision:0.01mm Power:4KW Voltage:380V The maximum hooping force:252 tons Rotated speed:1440r/min Oil pump displacement:10ml/rad Dimension:858×910×1550（mm） Weight:800Kg The maximum opening diameter:+68mm SK-100 type numerical control tube locking machine structure diagram:	**Certificate**	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	**Origin**	China

CONTENTS

- Main technical character
- SK-100 type numerical control tube locking machine structure diagram:

Main technical character

Hooping steel wire rubber tube inner diameter:φ4 ~ φ51IVmm

Industry tube inner diameter:89mmat the most

Scale precision:0.01mm

Power:4KW

Voltage:380V

The maximum hooping force:252 tons

Rotated speed:1440r/min


Oil pump displacement:10ml/rad

Dimension:858×910×1550（mm）

Weight:800Kg

The maximum opening diameter:+68mm

SK-100 type numerical control tube locking machine structure diagram:

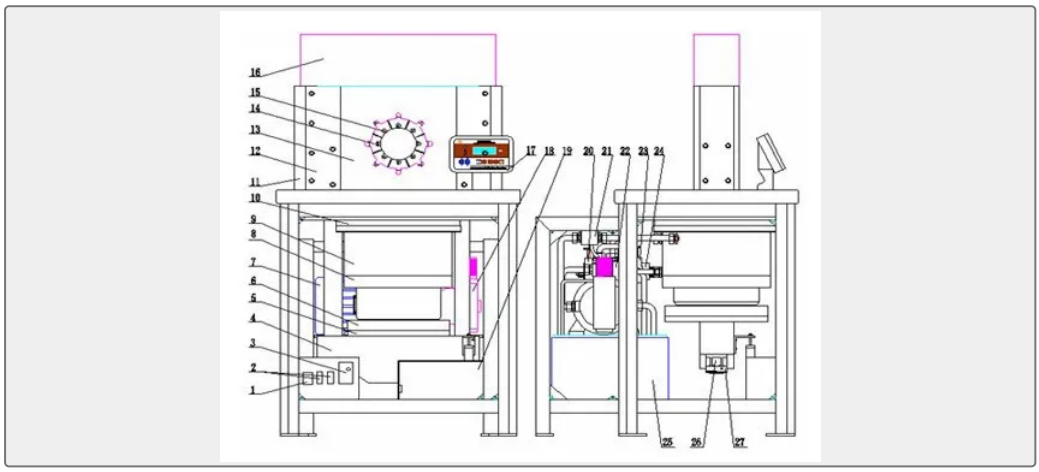

1.bridge rectifier 2. relay 3. time delay unit 4. pressure bar 5. down jointbar 6. joint buckle closure 7. electric motor 8. down end closure 9. hydro-cylinder 10. up jointbar 11. slide board 12. clamping plate 13. back plate 14. die holder 15. drawbar 16. up covering cap 17. electrical equipment controlbox18. oil pump 19. electrical equipmentbox20. hooping pressure regulating valve 21. fluid control non-return valve 22. integrated circuit block 23. mould opening pressure regulating valve 24. magnetic change valve 25. oilbox26. nut 27. lock circular nut

Name:	Hose crimping machine,hose crimper,Pipe locking machine,Locking pipe machine,tube locking machine, tube crimping machine,tube crimper,pipe crimping machine,pipe crimper.
Usage	Crimping hose

Popular type:	DX68 Hydraulic high pressure hose crimping machine 6-51mm
	DSG51AMulti-function pipe crimping machine 6-51mm
	DSG51B Multi-function pipe crimper 6-51mm
	DSG75 High pressure hose crimper6-75mm
	DSG150 High pressure hose crimping machine 6-150mm
	DSG102S hose crimping machine 6-102mm
	DSG250A Locking Pipe Machine 6-51mm
	DSG250B tube crimping Machine 6-51mm
	DSG250C Pipe Locking Machine 6-51mm
	JK400 tube crimper 6-64mm
	JKS200 Manual type hose crimping machine 6-32mm
	SK100 Numeric control locking pipe machine 4-89mmSK100Numeric control locking pipe machinedeveloped by our factory is suitable for hooping processing of the assembly of high pressure rubber tube, fibre pipe and plastic pipe used in industry,agriculture and fluid drive of engineering machinery. It has the advantages of wide hooping range, high precision (adopt PLC control), high degree automation,easy operation and maintenance, etc.SK100Numeric control locking pipe machinedeveloped by our factory is suitable for hooping processing of the assembly of high pressure rubber tube, fibre pipe and plastic pipe used in industry,agriculture and fluid drive of engineering machinery. It has the advantages of wide hooping range, high precision (adopt PLC control), high degree automation,easy operation and maintenance, etc.SK100Numeric control locking pipe machinedeveloped by our factory is suitable for hooping processing of the assembly of high pressure rubber tube, fibre pipe and plastic pipe used in industry,agriculture and fluid drive of engineering machinery. It has the advantages of wide hooping range, high precision (adopt PLC control), high degree automation,easy operation and maintenance, etc.SK100Numeric control locking pipe machinedeveloped by our factory is suitable for hooping processing of the assembly of high pressure rubber tube, fibre pipe and plastic pipe used in industry,agriculture and fluid drive of engineering machinery. It has the advantages of wide hooping range, high precision (adopt PLC control), high degree automation,easy operation and maintenance, etc.SK100Numeric control locking pipe machinedeveloped by our factory is suitable for hooping processing of the assembly of high pressure rubber tube, fibre pipe and plastic pipe used in industry,agriculture and fluid drive of engineering machinery. It has the advantages of wide hooping range, high precision (adopt PLC control), high degree automation,easy operation and maintenance, etc.SK100Numeric control locking pipe machinedeveloped by our factory is suitable for hooping processing of the assembly of high pressure rubber tube, fibre pipe and plastic pipe used in industry,agriculture and fluid drive of engineering machinery. It has the advantages of wide hooping range, high precision (adopt PLC control), high degree automation,easy operation and maintenance, etc.