

CHAIN SLING

Steel Plate Lifting Chain Sling

Description The parameter of chain in the table is in accordance with JB/T8108.1-1999Grade(8) The wipe rope uses the chain link with the shackle The length of pressed wire rope sling=50times of the dia ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Material	High Quality Alloy Steel
Weight / Size	Technical Data Model Diamerter (mm) WLL(t) Wire rope weight (kg) Chain ...
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Chain Sling	Model / SKU	Steel-Plate-Lifting-Chain-Sling
Standard	EN	Material	High Quality Alloy Steel
Weight / Size	Technical Data Model Diameter (mm) WLL(t) Wire rope weight (kg) Chain weight (kg) chain Wire rope Room temperature High temperature YLSP-6 6 10 2 1 0.6 0.79 YLSP-8 8 13 3 1.5 1.1 1.38 YLSP-10 10 16 5 2.5 1.8 2.2 YLSP-12 12 20 7 3.5 3.2 3.1 YLSP-14 14 24 10 5 5.2 4.13 YLSP-16 16 26 12 6 6.4 4.63 YLSP-18 18 28 16 8 8.78 6.85 YLSP-20 20 32 20 10 11.1 8.6 YLSP-22 22 36 24 12 15.3 10.2 YLSP-24 24 40 28 14 20.3 12.78 YLSP-26 26 44 34 17 27.7 14.87 YLSP-30 30 48 44 22 35.2 19.6 YLSP-34 34 56 72 36 46.5 22.7	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	Description Technical Data
----------	--


Description

The parameter of chain in the table is in accordance with JB/T8108.1-1999Grade(8)

The wipe rope uses the chain link with the shackle

The length of pressed wire rope sling=50times of the dia of wire rope.

Technical Data

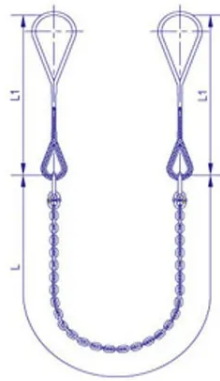

Model	Diameter (mm)		WLL(t)		Wire rope weight (kg)	Chain weight (kg)
	chain	Wire rope	Room temperature	High temperature		
YLSP-6	6	10	2	1	0.6	0.79
YLSP-8	8	13	3	1.5	1.1	1.38
YLSP-10	10	16	5	2.5	1.8	2.2
YLSP-12	12	20	7	3.5	3.2	3.1
YLSP-14	14	24	10	5	5.2	4.13
YLSP-16	16	26	12	6	6.4	4.63
YLSP-18	18	28	16	8	8.78	6.85
YLSP-20	20	32	20	10	11.1	8.6
YLSP-22	22	36	24	12	15.3	10.2
YLSP-24	24	40	28	14	20.3	12.78
YLSP-26	26	44	34	17	27.7	14.87
YLSP-30	30	48	44	22	35.2	19.6
YLSP-34	34	56	72	36	46.5	22.7