

IEC 60092 STANDARD CABLE (KOREA TYPE)

TFOI Flame Retardant Marine Power & Control Cable 0.6/1KV (Light Weight Cable)

ISO9001 Supplier

Class Certificate

Export Supply

TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable, easy installation; Tinned Copper Wire braided. Cable Construction Conductor: Tinned Copper. IEC 6022...



Key Highlights


Category	IEC 60092 Standard Cable (Korea Type)
Standard	EN
Material	Tinned Copper/XLPE insulation/Galvanized Steel Wire Braided/SHF1
Weight / Size	TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable...
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	IEC 60092 Standard Cable (Korea Type)	Model / SKU	TFOI-Flame-Retardant-Marine-Power-Control-Cable-0-6-1KV-Light-Weight-Cable
Standard	EN	Material	Tinned Copper/XLPE insulation/Galvanized Steel Wire Braided/SHF1
Weight / Size	TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable, easy installation;	Surface	Galvanized
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	- China TFOI Flame Retardant Marine Power & Control Cable 0.6/1KV (Light Weight Cable): - Standards - Feature	- Cable Construction - Cores & Size - Application
----------	---	---

China TFOI Flame Retardant Marine Power & Control Cable 0.6/1KV (Light Weight Cable):

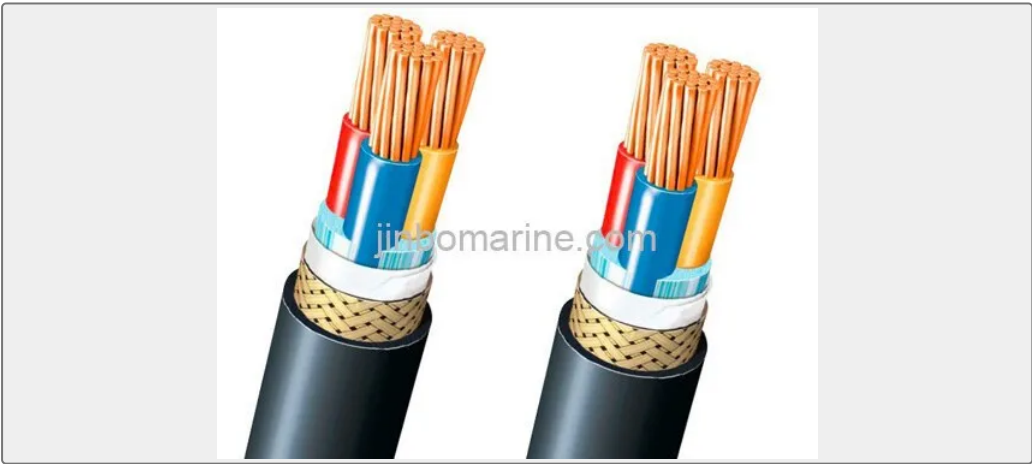

TFOI Flame Retardant Marine Power & Control Cable are Light Weight Cable, easy installation; Tinned Copper Wire braided.

Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Inner Covering: Halogen-Free Tape

Armour : Galvanized Wire Braided

Outer Sheath : Halogen-free Thermoplastic Polyolefin(SHF1)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24

Size (sqmm): 1.5, 2.5. 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

Feature

Halogen-free, Low Smoke, Flame retardant

Application

The cable is fixed installation on ships and offshore units, used for power, lighting and control.