COMBUSTIBLE GAS ALARM SYSTEM

# TON90B Combustible Gas Alarm Controller

ISO9001 Supplier

Class Certificate

Export Supply

TON90B Combustible Gas Alarm Controller Performance Installation Mode: Wall/Panel Mounting Alarm Mode: Sound, Light Display Mode: Common Unit Alarm Status, Each Loop Displays Gas Con...




## Key Highlights

| | |
|---|---|
| **Category** | Combustible Gas Alarm System |
| **Standard** | GB |
| **Material** | 304 |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications

| | | | |
|---|---|---|---|
| **Category** | Combustible Gas Alarm System | **Model / SKU** | TON90B-Combustible-Gas-Alarm-Controller |
| **Standard** | GB | **Material** | 304 |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | **Warranty** | 12 Months unless specified otherwise |
| **Origin** | China | | |

**CONTENTS**

- Performance
- Structure Material
- Electrical Characteristics
- Approval

## Performance

Installation Mode: Wall/Panel Mounting

Alarm Mode: Sound, Light

Display Mode: Common Unit Alarm Status, Each Loop Displays Gas Concentration Analog and Digital

Power Comsumption:3W/Loop, 15W/Public Module

## Electrical Characteristics

Power Supply:85-265V AC, 50-60Hz


Input Signal: Three Wire or Two Wire 4-20Ma

Communication Mode: RS485

Relay Output: Each channel grop 2 passive normally open, normally closed contact, contact capacity 250V AC, 20A, Optional level or pulse output.

## Structure Material

Main Body: Stainless Steel 304, ABS

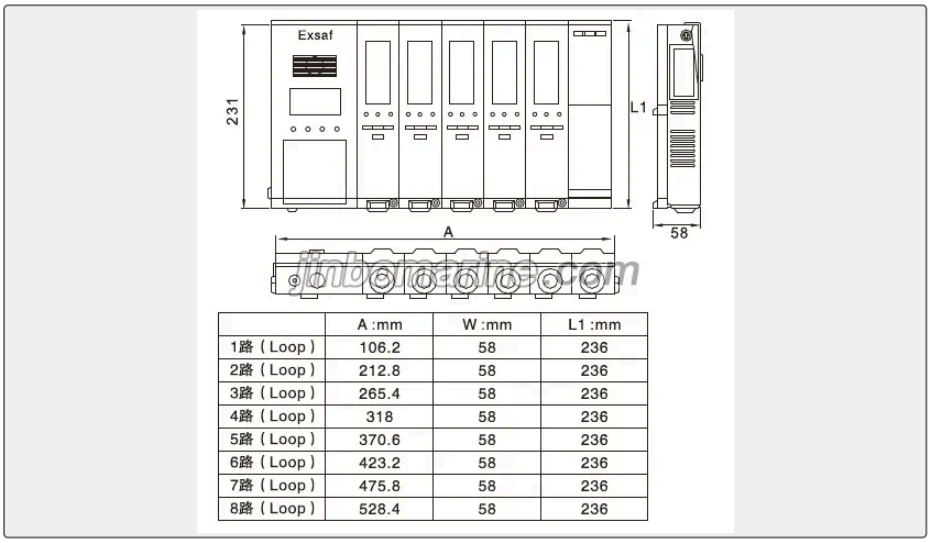


| | A :mm | W :mm | L1 :mm |
|---|---|---|---|
| 1路 ( Loop ) | 106.2 | 58 | 236 |
| 2路 ( Loop ) | 212.8 | 58 | 236 |
| 3路 ( Loop ) | 265.4 | 58 | 236 |
| 4路 ( Loop ) | 318 | 58 | 236 |
| 5路 ( Loop ) | 370.6 | 58 | 236 |
| 6路 ( Loop ) | 423.2 | 58 | 236 |
| 7路 ( Loop ) | 475.8 | 58 | 236 |
| 8路 ( Loop ) | 528.4 | 58 | 236 |

## Approval

Fire Certification: CCCF

Classification Society Certificate: CCS

Executive Standard: GB168808, GD-01 2006

Protection Grade: IP44

Temperature Range: -10 degree.