

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

HANGER AND ELASTIC SUPPORT

Type TS Movable Elastic Hanger

The elastic elements are made by special type rubber, it has fine vibration resistance and impact resistance. Advantage: High temperature, low temperature resistance, oil resistance and aging resistance. The hanger ado...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Hanger And Elastic Support
Standard	EN
Weight / Size	Dimension Type TS Movable Elastic Hanger Main Specifications Model Size ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Hanger And Elastic Support	Model / SKU	Type-TS-Movable-Elastic-Hanger
Standard	EN	Weight / Size	Dimension Type TS Movable Elastic Hanger Main Specifications Model Size Static Load Workload A(mm) B(mm) C(mm) D(mm) kgf kgf TS-444-1 530-650 125 70 120 800 270 TS-472-1 670-830 160 90 160 1500 500 TS-444-2 470-590 125 70 120 1000 350 TS-472-2 550-710 160 90 160 2000 700
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China Type TS Movable Elastic Hanger:
 - Dimension
- Type TS Movable Elastic Hanger Main Specifications



0.059473s

China Type TS Movable Elastic Hanger:


The elastic elements are made by special type rubber, it has fine vibration resistance and impact resistance.

Advantage: High temperature, low temperature resistance, oil resistance and aging resistance.

The hanger adopts active joint, the length can be adjusted, and it can be move freely within the range of exhaust pipe thermal deformation.

Applicable range: suitable for horizontal or vertical exhaust pipe.

Dimension

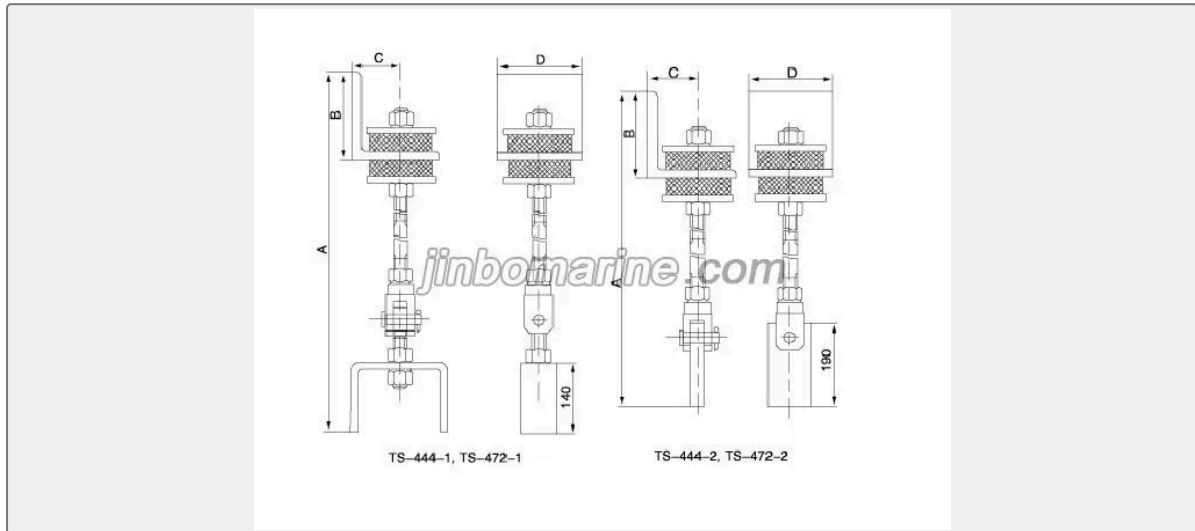

Type TS Movable Elastic Hanger Main Specifications

Model	Size				Static Load	Workload
	A(mm)	B(mm)	C(mm)	D(mm)		
TS-444-1	530-650	125	70	120	800	270
TS-472-1	670-830	160	90	160	1500	500
TS-444-2	470-590	125	70	120	1000	350
TS-472-2	550-710	160	90	160	2000	700