

MARINE AIR HORN


WKD-1 Foghorn Automatic Controller

Voltage: 220V Power: 50HZ Size: 385x315x167mm Weight: 15KGS • Microcomputer chip is adopted; switch panel is covered with PVC, safe and reliable with simple structure and low power cons...

ISO9001 Supplier

Class Certificate

Export Supply

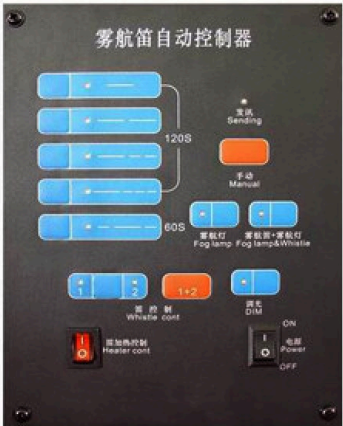

Key Highlights

Category	Marine Air Horn
Standard	DIN
Weight / Size	50HZ Size:
Certificate	CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Marine Air Horn	Model / SKU	WKD-1-Foghorn-Automatic-Controller
Standard	DIN	Weight / Size	50HZ Size:
Surface	If it is unused for certain time, please check the insulation resistance of the electric part of the control to its outer surface.	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China WKD-1 Foghorn Automatic Controller:
- Operation Instruction for Foghorn Automatic Controller

China WKD-1 Foghorn Automatic Controller:

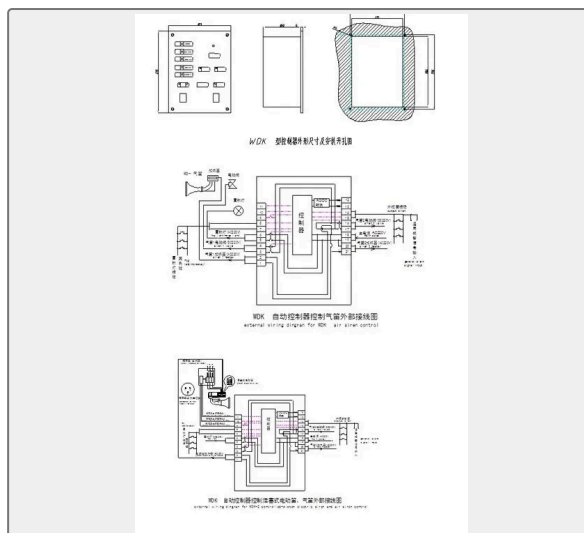

Voltage: 220V

Power: 50HZ

Size: 385x315x167mm

Weight: 15KGS

- Microcomputer chip is adopted; switch panel is covered with PVC, safe and reliable with simple structure and low power consumption.
- Meets the requirements stipulated in “Convention on the International Regulation for Preventing Collisions at Sea” (COLREG) and “International Convention for the Safety of Life at Sea” (SOLAS). It can automatically send out different sound and light signals.
- All sirens and light signals can be controlled automatically, manually, or by remote. Remote control is made by water-tight buttons. The numbers and installation position of the water-tight buttons (see picture 4) are not limited. The dimensions, sizes and numbers of the water-tight buttons may be requested upon order-placing.
- The brightness of the work indicator is adjustable which creates a good environment for the sailor to observe and will not distract his/her concentration.
- A number of different power supplies are offered including AC220V, AC110V and DC24V. Individual request can be made upon order-placing.
- When AC power supply comes across loss of voltage, it will automatically switch to the backup power supply of DC24V. The power supply and automatic switch may be requested upon order-placing.
- 2 types of control: embedded and wall-hung.

Operation Instruction for Foghorn Automatic Controller

1. Our product meets the requirements on sound and light signals stipulated in “Convention on the International Regulation for Preventing Collisions at Sea” (COLREG).

- According to item35 in“COLREG”: Sound signals should be used in poor visibility. (Poor visibility refers to limited visibility under the circumstances of fog, dust-storm, snow, storm, sand storm and etc.) The sound signals of our product:

Siren Type

- /2min (1 long ring/2mins)
- —/2min (2 long rings/2mins)
- ··/ 2min (1 long and 2 short rings/2mins)
- ... / 2min (1 long and 3 short rings/2mins)
- — · / 1min (1 short ,1 long and 1 short rings/1min)

u One long ring lasts for 4 ~ 6 seconds, one short ring lasts for 1 second. Interval is 2 seconds.

2. Working Condition

- (1) Surrounded temperature: 25°C ~ 55°C
- (2) Relative humidity: 92% ~ 98%
- (3) When vibration frequency is 2 ~ 13.2 HZ, displacement amplitude is ± 1 mm. When vibration frequency is 13.2 ~ 80 HZ, acceleration amplitude is $\pm 7\%$.
- (4) The voltage of the control is within $+6\% \sim -10\%$ of the rated voltage. It can work safely when the frequency change is within $\pm 5\%$ of the rated frequency.
- (5) Power loss of the control: 15 W
- (6) Output contactor capacity of the control: 5A/250V (ultimate capacity: 10A/AC250V)
- (7) Outer size of the control: length x width x height = 216×165×100 mm
- (8) Weight of the control: 3 Kg

3. Dimensions and Installation Sizes

Please see picture 1 for dimensions and installation sizes.

4. External Wiring Diagram for WDK-2 Controlled-Piston Electric Siren and Air Siren

Please see picture 2 for the external wiring diagram for WDK-2 controlled piston electric siren and air siren, controlled air siren 1. Air siren 2 external wiring diagram (see picture 3)

5. Use and Protection of the Control

1. Please uprightly install the wall-hung control and install the external wiring based on the electrical schematic diagram.
2. The supplementary buttons of the control are 2-4 water-tight power switches which should be installed on the left, right and middle of the shipboard according to your need.
3. When the control is in use, press the power switch to "on". Power is supplied when the indicator on the control panel lights. Any sound signals will be made if "manual" is pressed. "Sending" will light when signals are sending. If automatic and periodic signal is needed, please press the buttons according to the functions specified on the control panel. Press "manual" if the automatic fog siren needs to stop. Please note that "manual" is not only for manually controlling the siren but also for stopping the siren.
4. Press "Fog Lamp" if fog siren (Morse Light) is needed. The indicator beams. Morse key can be connected with "Fog lamp output button" to send out Morse Signals. If fog light and fog siren need to be work simultaneously, press "Fog lamp & whistles" and press other buttons. "Whistles cont" controls Siren 1 and Siren 2. Press "1+2" if two sirens need to work simultaneously and the indicator beams. (Siren 1 is default setting). Please note that button "1" and "2" are mutually locked.
5. Brightness of the indicator may be adjusted stepwise through "DIM".

6. Please disconnect power supply before any inspection and repair when it breaks down.
7. Please place the control in dry and ventilated places when it's not used. Keep from moisture. Periodic inspection is suggested. If it is unused for certain time, please check the insulation resistance of the electric part of the control to its outer surface. If the insulation resistance is lower than $10\text{M}\Omega$, the control needs to be dried until the insulation resistance exceeds $10\text{M}\Omega$.