

VORTEX PUMP

WZ Series Marine Multistage Self-priming Vortex Boiler Water Feed Pump

ISO9001 Supplier

Class Certificate

Export Supply

WZ Series Marine Multistage Self-priming Vortex pump General description WZ series is suitable for conveying at a temperature of -20c to +80c, Viscosity of not more than 5 E without solid particles, volatil...



Key Highlights

Category	Vortex Pump
Standard	EN
Material	Cast iron pump cast, Bronze impeller, Stainless steel pump shaft
Weight / Size	WZ Series Marine Multistage Self-priming Vortex pump General description...
Certificate	CCS
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	

Technical Specifications			
Category	Vortex Pump	Model / SKU	WZ-Series-Marine-Multistage-Self-priming-Vortex-Boiler-Water-Feed-Pump
Standard	EN	Material	Cast iron pump cast, Bronze impeller, Stainless steel pump shaft
Weight / Size	WZ Series Marine Multistage Self-priming Vortex pump General description WZ series is suitable for conveying at a temperature of -20c to +80c, Viscosity of not more than 5 E without solid particles, volatile, easy gasification of seawater and freshwater.It can be used for ship,petroleum,chemical industry,printing and dyeing industry, hotels, villas and high-rise living water for boiler.This type pump has the advantages of small volume,light weight,strong self-absorption,can be equipped with motor,gasoline engine,diesel engine as power.	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ WZ Series Marine Multistage Self-priming Vortex pump ■ Model explanation ■ Performance parameter	■ General description ■ Structural Specifications
----------	--	---

WZ Series Marine Multistage Self-priming Vortex pump

General description


WZ series is suitable for conveying at a temperature of -20c to +80c, Viscosity of not more than 5 E without solid particles, volatile, easy gasification of seawater and freshwater.It can be used for ship,petroleum,chemical industry,printing and dyeing industry, hotels, villas and high-rise living water for boiler.This type pump has the advantages of small volume,light weight,strong self-absorption,can be equipped with motor,gasoline engine,diesel engine as power.

Model explanation

For the model 32WZ-18x3
32:inlet and outlet diameter 32mm

- W: vortex pump
- Z: self-priming
- 18: single stage head 18m
- 3: stage series 3

Structural Specifications

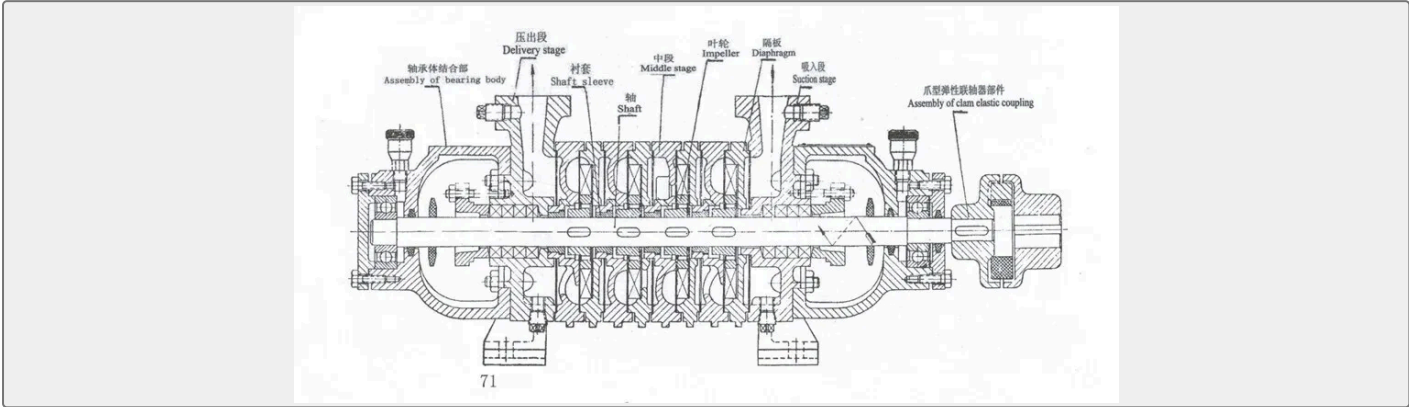

Performance parameter

Type	impeller dia.	Suc'He ad	efficienc y	weight	Capacit y	Head	Power	Capacity	Head	Power
(mm)	(m)	%	(kg)	(m3/h)	m	kw	(m3/h)	m	kw	
50hz/60hz				50hz/1450rpm			60hz/1800rpm			
20WZ-14X2	100	7.5	23	10	1.44	28	0.75	1.73	23	1.5
20WZ-14X3		7.5	23	13	1.44	42	1.1	1.73	23	2.2
20WZ-14X4		7.5	23	16	1.44	56	1.5	1.73	23	3
25WZ-16X2	110	7	28	13	2.88	32	1.5	3.46	28	3
25WZ-16X3		7	28	17.6	2.88	48	2.2	3.46	28	4
25WZ-16X4		7	28	22	2.88	64	3	3.46	28	5.5
32WZ-18X2	132	6.5	32	19	5.4	36	3	6.48	32	5.5
32WZ-18X3		6.5	32	22	5.4	54	4	6.48	32	7.5
32WZ-18X4		6.5	32	25	5.4	72	5.5	6.48	32	11
40WZ-28X2	148	6	33	38	9	56	7.5	10.8	33	15
40WZ-28X3		6	33	45	9	84	11	10.8	33	18.5
40WZ-28X4		6	33	52	9	112	15	10.8	33	22
50WZ-32X2	170	5.5	35	49	14.4	64	11	17.28	35	18.5
50WZ-32X3		5.5	35	60	14.4	96	18.5	17.28	35	30

65WZ-36X2	190	5	36	21.6	72	22	25.92	36	30
65WZ-36X3		5	36	21.6	108	20	25.92	36	45