

MARINE PRESSURE INSTRUMENT


YC-M Type Diaphragm Sealed Pressure Gauge

ISO9001 Supplier

Class Certificate

Export Supply

Product Description: Diaphragm sealed pressure gauge can be used to measure pressure of liquid which have the characteristic of corrosive,high viscosity,easily riming,solid state granule,higher temperature in ship ...

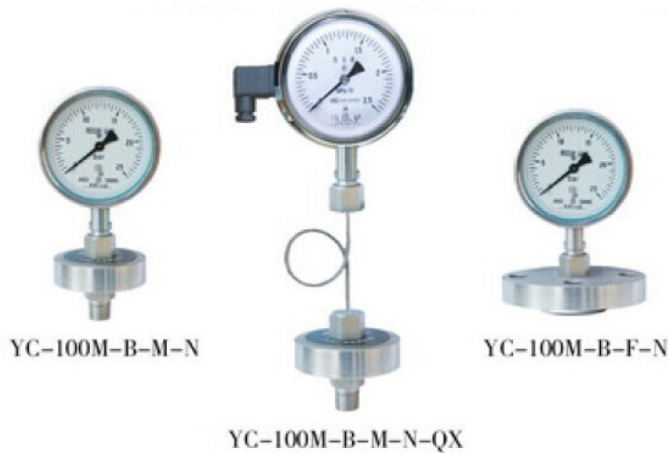

Key Highlights

Category	Marine Pressure Instrument
Standard	EN
Certificate	CCS.GL,LR,BV,ABS,DNV,RIN A,NK,KR and EC certificate.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Pressure Instrument	Model / SKU	YC-M-Type-Diaphragm-Sealed-Pressure-Gauge
Standard	EN	Certificate	CCS.GL,LR,BV,ABS,DNV,RINA,N K,KR and EC certificate.
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

■ Product Description:

■ Main technical specification:

Product Description:

Diaphragm sealed pressure gauge can be used to measure pressure of liquid which have the characteristic of corrosive,high viscosity,easily riming,solid state granule,higher temperature in ship and industrial equipment.

Main technical specification:

Measure range:-0.1-0MPa,0-0.1~60MPa

Accuracy: 1.6,2.5

Medium temperature: Equal or less than 80 centigrade

● 型号标记 MODEL SIGN

YC-100 M- - - -

Q- 遥测 Remote measuring

X- 信号远传 (Ex ia II CT6) Output signal

N- 表头充液耐震型 Dial is liquid filled and anti-vibration type YC-100M-B-M-N-QX

接口型式 Connection type

M M1- 螺纹型 Screw thread type

F F1 F2 F3- 法兰型 Flange type

壳体材料 Material of body :

B- 不锈钢 Stainless steel

隔膜式 Diaphragm sealed type

表面直径 Dial dia.

船用压力表 Marine pressure gauge

YC-100M-B-M-N

YC-100M-B-F-N

● 隔膜装置尺寸 THE MOUNTING DIMENSION

型式 Model	测量上限 Upper limit	法兰标准 Flange standard	D	K	d	f	L	C	B	图号 Drawing No.	材料 Material	
F	4MPa	GB2506-2005	185	145	122	3	18	20	65	图一 Figure I	SUS304 SUS316	
F1	6-10MPa		165	125	102	3	18	20	50	图二 Figure II		
	16-25MPa		115	85	68	2	14	18	25			

W

<https://www.jinbomarine.com/print/yc-m-type-diaphragm-sealed-pressure-gauge>

2/2