

CHAIN SLING

YDSZ Swivel Hoist Ring With Metric Thread

ISO9001 Supplier

Class Certificate

Export Supply

YDSZ Swivel Hoist Ring With Metric Thread; 1.360° rotation, 180° flip The lifting ring can rotate with the direction of the force to adjust the angle of the force. 2.High Strength The bolts are made of allo...



Key Highlights

Category	Chain Sling
Standard	DIN
Material	2.High Strength The bolts are made of alloy steel 42CrMo, the tensile st...
Weight / Size	5.Complete specifications The thread specifications are complete, the ra...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications			
Category	Chain Sling	Model / SKU	YDSZ-Swivel-Hoist-Ring-With-Metric-Thread
Standard	DIN	Material	2.High Strength The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, the rotating base is a one-piece design and is forged as a whole for higher strength.
Weight / Size	5.Complete specifications The thread specifications are complete, the rated load range is wide (M8-M100, 0.5T-50T), and the thread size can be customized according to customer requirements.	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	■ YDSZ Swivel Hoist Ring With Metric Thread	■ YDSZ Swivel Hoist Ring With Metric Thread Drawing
	■ YDSZ Swivel Hoist Ring With Metric Thread Parameters	

YDSZ Swivel Hoist Ring With Metric Thread

- 1.360° rotation, 180° flip
The lifting ring can rotate with the direction of the force to adjust the angle of the force.
- 2.High Strength
The bolts are made of alloy steel 42CrMo, the tensile strength before heat treatment is 1080Mpa, the mechanical properties are improved after the material is changed, the rotating base is a one-piece design and is forged as a whole for higher strength.
- 3.4 times safety factor
Different loads can be lifted in different directions, but 4 times safety factor is guaranteed
- 4.Easy to install
The bolt has a hexagonal design, and the lifting point can be easily installed on the object to be lifted by a wrench.
- 5.Complete specifications
The thread specifications are complete, the rated load range is wide (M8-M100, 0.5T-50T), and the thread size can be customized according to customer requirements.

YDSZ Swivel Hoist Ring With Metric Thread Drawing

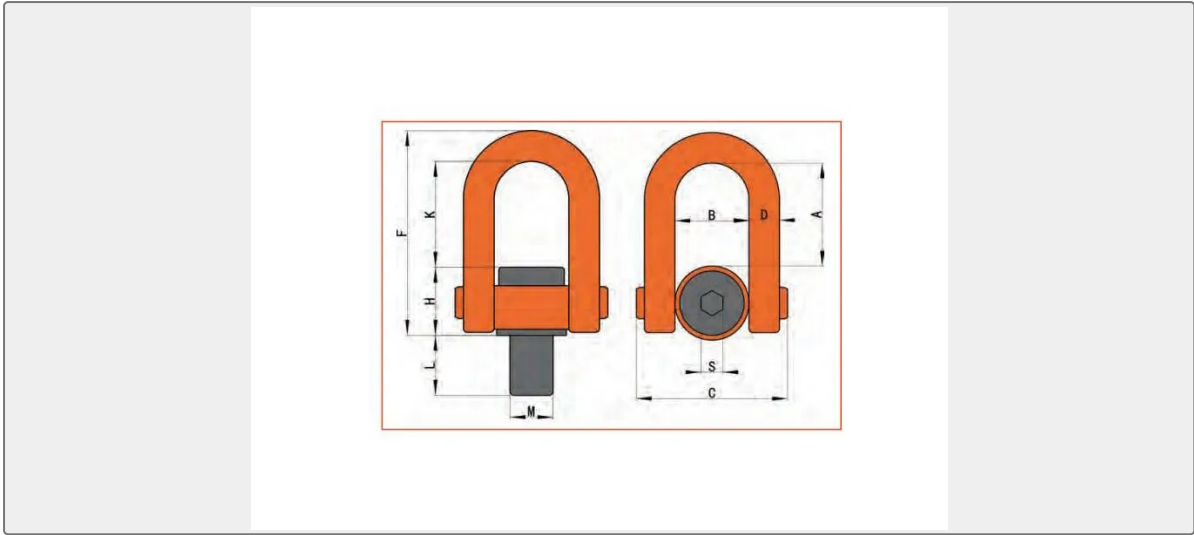

YDSZ Swivel Hoist Ring With Metric Thread Parameters

ITEM NO.	WLL/T	THREAD/M	TORQUE/Nm	WEIGHT /KG	
YDSZ-M64	33T	M64X6.0-6G	2720	42	
YDSZ-M72	35T	M72X6.0-6G	3200	43	
YDSZ-M80	40T	M80X6.0-6G	3600	45	
YDSZ-M90	45T	M90X6.0-6G	4100	47	
YDSZ-M100	50T	M100X6.0-6G	4500	50	
ITEM NO.	TECHNICAL PARAMETERS/MM				
	L	A	B	C	
YDSZ-M64	100	195	143	278	
YDSZ-M72	110	195	143	278	
YDSZ-M80	120	195	143	278	
YDSZ-M90	135	195	143	278	
YDSZ-M100	150	195	143	278	
ITEM NO.	TECHNICAL PARAMETERS/MM				
	D	F	K	H	S
YDSZ-M64	60	400	213	127	36
YDSZ-M72	60	400	213	127	36
YDSZ-M80	60	400	213	127	36
YDSZ-M90	60	400	213	127	36
YDSZ-M100	60	400	213	127	36