

MARINE AIR CONDITIONER


YTLS-300 Navy Water Chiller Module

Description: YTLS navy water chiller module design make the installation convenient and flexible, developing the max efficiency, improving the reliability and accessible for maintenance, single water chil...

ISO9001 Supplier

Class Certificate

Export Supply

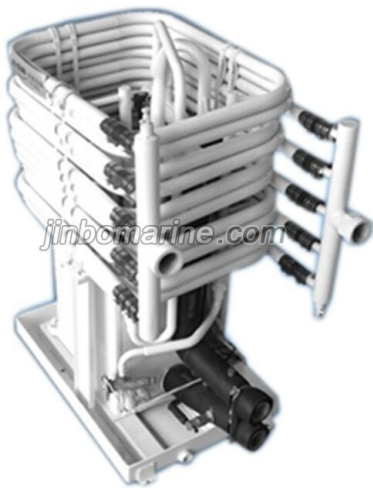

Key Highlights

Category	Marine Air Conditioner
Standard	EN
Material	Each water chiller module includes hermitic scroll compressor, 4-way rev...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Marine Air Conditioner	Model / SKU	YTLS-300-Navy-Water-Chiller-Module
Standard	EN	Material	Each water chiller module includes hermitic scroll compressor, 4-way reverse valve , double way expansion valve, high efficient coaxial condenser, stainless steel plate type heat exchanger, high& low pressure switch, water flow controller and water pan etc.
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

■ Description:

■ Technical Data:

Description:

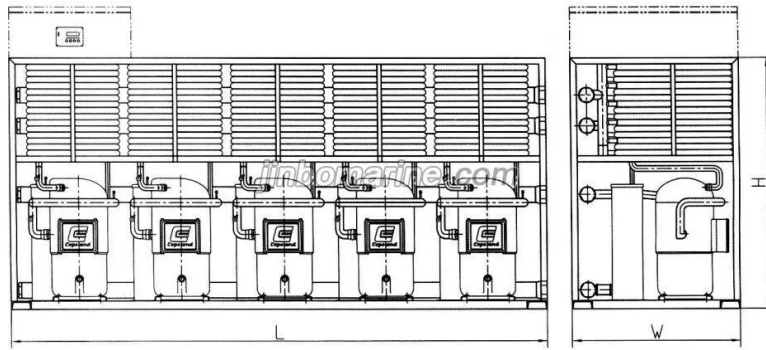

YTLS navy water chiller module design make the installation convenient and flexible, developing the max efficiency, improving the reliability and accessible for maintenance, single water chiller module may be combined together to provide a large system, which is easy to modify the type of for special service. Refrigerant circuit of single water chiller module is totally enclosed and filled with R22 at factory and need no charge on site. Chilled/heated water piping and cooling sea water piping can be collected individually, improving the connection speed and is convenient for customer installation.

Each water chiller module includes hermetic scroll compressor, 4-way reverse valve , double way expansion valve, high efficient coaxial condenser, stainless steel plate type heat exchanger, high& low pressure switch, water flow controller and water pan etc. Each assembly is assembled together compactly and make volume small.

Technical Data:

YTLS-300(IV)	YTLS-360(IV)	YTLS-600(IV)	YTLS-720(IV)	YTLS-720(IV)	YTLS-864(IV)
87.5	105	175	210	210	252
300000	360000	600000	720000	720000	864000
96.5	115.7	192.5	231	231	277.2
330000	395000	650000	790000	790000	948000
R22(R134a,R404A.R407C)					
AC380V 50Hz 3p/AC440V 60HZ 3p					
18.5/27	25/35	36.5/51.5	47.5/66.5	43.8/61.8	57/79.8
36.5/53.8	49.2/69	71.8/99.8	93.2/120.2	90.6/111.2	117.6/142
15	18	30	36	36	44.5
Cooling 12/7°C, heating40/45°C					
22.5	26.7	45	55	55	66
Cooling≤32°C, heating≥5°C					
1750	2200	2200	2250	2700	2700
780	780	880	880	950	950
820	820	980	1050	1050	1050
580	750	1010	1230	1450	1550