

Pneumatic control harbour type towing hook



Brief description:

Popular model:15 ton, 30 ton, 45 ton, 56 ton,100 ton etc.

Certificate:CCS,BV, ABS ,DNV,GL,LR,mill certificate etc can be provide.

Feature:

Smooth surface.

Easy to handle and low maintenance.

Safe handling and releasing with a small manual effort.


Applications:

Container berth,General cargo berth,Offshore dock,Ferry dock etc.

Work principle:Leverage.

Ensure the hook and hook knife tight junctions before use it, and make the crankshaft in the working state.

Drawing:

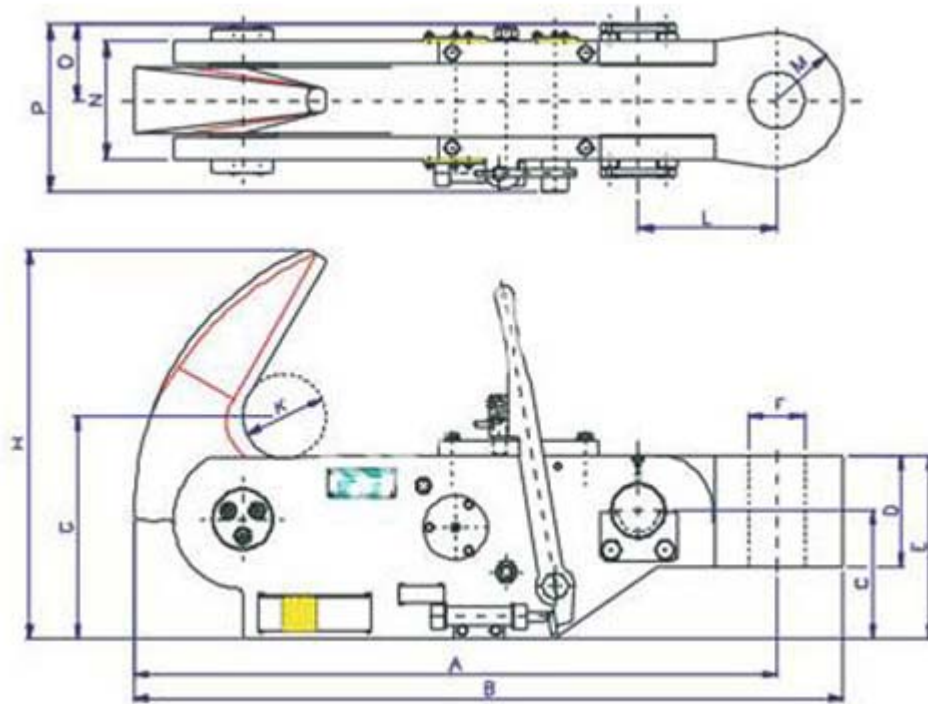

Size chart:

Product No.	Safe working load(Kn)	Test load(Kn)	Release load(Kn)	Weight(kg)	A	B	C	D	E	F	G	H	K	L	M	N	N
PHH-001	150	300	150	52	521	571	100	100	150	40	174	316	65	110	50	100	100
PHH-002	300	600	300	143	788	868	160	130	225	60	268	461	96	180	80	125	125
PHH-003	450	900	450	289	1023	1123	200	160	260	80	350	616	130	210	100	148	148
PHH-004	562	1125	562	352	1073	1183	200	180	290	90	350	616	130	250	110	170	170
PHH-005	1000	1500	1000	526	1159	1279	230	200	330	100	400	700	150	250	120	212	212