


产品应用范围  
Application

适用于工作介质为油的各类船舶。  
It can be applied to kinds of vessels  
whose working medium is oil.



润滑艉轴密封装置

Oil lubrication stern shaft sealing apparatus

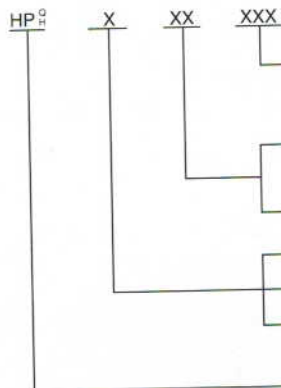

规格：衬套外径 size:liner diameter  
F带防沙圈，D带挡物环，W带防渔网装置  
F——with sand ring,D——with sundry object ring,  
W——with device against fishing net  
无代号为单密封型it is single sealing type if no code letter  
2.二道密封圈 with two(2)seal rings  
3.三道密封圈 with three(3)seal rings  
4.四道密封圈 with four(4)seal rings  
型号标记：海鹏油润滑艉轴前后密封装置  
Marks: Hai Peng oil lubrication stern shaft fwd/aft sealing apparatus

标记示例

衬套直径为220mm的密封装置，后密封为三道密封圈，带防沙圈  
前密封装置型号为：HPQ2-220，后密封装置型号为：HPH3F-220

An example of marks

Sealing apparatus:a liner diameter of 220mm and three seal rings for the aft sealing;if there is a sand prevention ring  
The mark of forward stern shaft sealing apparatus will be HPQ2-220;  
The mark of aft stern shaft sealing apparatus will be HPH3F-220



技术参数

Technical parameters

艉轴基本直径范围：	50~1150mm
艉轴耐磨衬套外径：	70~1250mm
滑油工作压力：	1~2bar
滑油工作温度：	-25℃~+110℃
艉轴耐磨衬套线速度：	≤7m/sec
平均泄漏量：	5~30ml/h
Diameter range of stern shaft	50~1150mm
Diameter of wearproof liner of stern shafts	70~1250mm
Lubricating oil working pressure	1~2bar
Lubricating oil working temperature	-25℃~+110℃
Line speed of stern shaft wearproof liner	≤7m/sec
Average leakage	5~30ml/h