

# Jinbo Marine

Marine &amp; Offshore Equipment Datasheet

PRODUCT DATASHEET

## JIS MARINE COCK

# Marine Bronze Flanged Cock JIS F7381

Design Standard: JIS F7381-1996 Test Standard: JIS F7400-1996 Max Working Pressure ;  
0.5Mpa Hydraulic Test Pressure: Body-7.5Mpa, Plug-5.5Mpa Flange size as per JIS B2220  
5K Suitable Medium: ...

ISO9001 Supplier

Class Certificate

Export Supply



## Key Highlights

Category	JIS Marine Cock
Standard	JIS
Material	Bronze
Weight / Size	Body-7.5Mpa, Plug-5.5Mpa Flange size as per JIS B2220 5K Suitable Medium...
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications


Category	JIS Marine Cock	Model / SKU	Marine-Bronze-Flanged-Cock-JIS-F7381
Standard	JIS	Material	Bronze
Weight / Size	Body-7.5Mpa, Plug-5.5Mpa Flange size as per JIS B2220 5K Suitable Medium:	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

### CONTENTS

- China Marine Bronze Flanged Cock JIS F7381:
- Main Material:
- Main Size List(mm):


 0.043213s

# China Marine Bronze Flanged Cock JIS F7381:

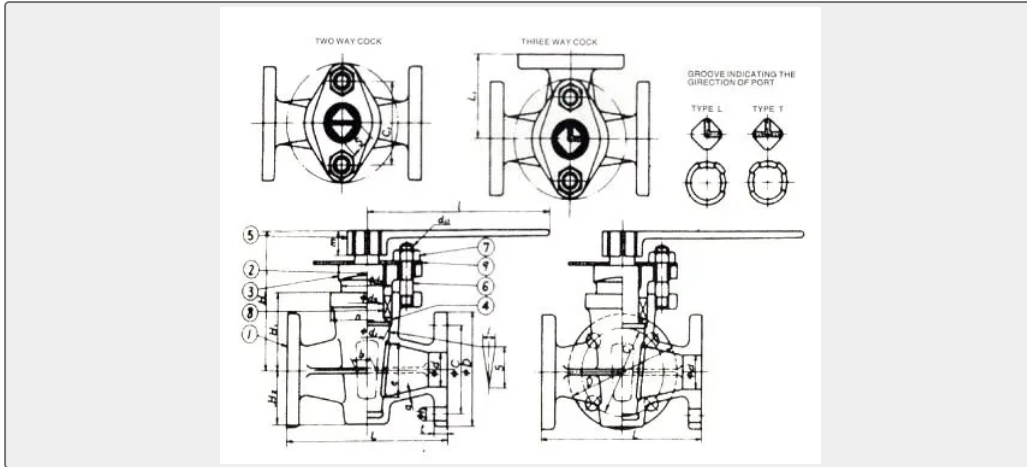

Design Standard: JIS F7381-1996

Test Standard: JIS F7400-1996

Max Working Pressure ; 0.5Mpa

Hydraulic Test Pressure: Body-7.5Mpa, Plug-5.5Mpa

Flange size as per JIS B2220 5K

Suitable Medium: water, fuel oil, Lub oil

\*There are two way cock, and three way cock. 3 way cock has T type & L type.

## Main Material:

- 1.Body:Bronze(BC6)
- 2.Plug:Bronze(BC6)
- 3.Packing gland: Brass
- 4.Seal Ring: Brass
- 5.Handle: Steel
- 6.Stud: Brass
7. Hexagon Nut: Brass
- 8.Packing: Asbestos

## Main Size List(mm):

IMPA	Size	L	D	C	No of bolt hole	d	H
Two-Way							
751601	25	130	95	75	4	12	105
751602	32	160	115	90	4	15	125
751603	40	170	120	95	4	15	135



751604	50	190	130	105	4	15	163
751605	65	220	155	130	4	15	201
L type Three-Way							
751607	25	130	95	75	4	12	105
751608	32	160	115	90	4	15	125
751609	40	170	120	95	4	15	135
751610	50	190	130	105	4	15	163
751611	65	220	155	130	4	15	201
T type Three-Way							
751612	25	130	95	75	4	12	105
751613	32	160	115	90	4	15	125
751614	40	170	120	95	4	15	135
751615	50	190	130	105	4	15	163
751616	65	220	155	130	4	15	201