

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

VORTEX PUMP

WZ Series Marine Multistage Self-priming Vortex Boiler Water Feed Pump

- ISO9001 Supplier
- Class Certificate
- Export Supply

WZ Series Marine Multistage Self-priming Vortex pump General description WZ series is suitable for conveying at a temperature of -20c to +80c, Viscosity of not more than 5 E without solid particles, volatil...

	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #1a3d3d; color: white;"> <th colspan="2">Key Highlights</th> </tr> </thead> <tbody> <tr> <td style="padding: 5px;">Category</td> <td style="padding: 5px;">Vortex Pump</td> </tr> <tr> <td style="padding: 5px;">Standard</td> <td style="padding: 5px;">EN</td> </tr> <tr> <td style="padding: 5px;">Material</td> <td style="padding: 5px;">Cast iron pump cast, Bronze impeller, Stainless steel pump shaft</td> </tr> <tr> <td style="padding: 5px;">Weight / Size</td> <td style="padding: 5px;">WZ Series Marine Multistage Self-priming Vortex pump General description...</td> </tr> <tr> <td style="padding: 5px;">Certificate</td> <td style="padding: 5px;">CCS</td> </tr> <tr> <td colspan="2" style="padding: 5px;"> We can supply according to your requirement, drawings, class certificate needs, and delivery schedule. </td> </tr> </tbody> </table>	Key Highlights		Category	Vortex Pump	Standard	EN	Material	Cast iron pump cast, Bronze impeller, Stainless steel pump shaft	Weight / Size	WZ Series Marine Multistage Self-priming Vortex pump General description...	Certificate	CCS	We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.	
Key Highlights															
Category	Vortex Pump														
Standard	EN														
Material	Cast iron pump cast, Bronze impeller, Stainless steel pump shaft														
Weight / Size	WZ Series Marine Multistage Self-priming Vortex pump General description...														
Certificate	CCS														
We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.															



Technical Specifications			
Category	Vortex Pump	Model / SKU	WZ-Series-Marine-Multistage-Self-priming-Vortex-Boiler-Water-Feed-Pump
Standard	EN	Material	Cast iron pump cast, Bronze impeller, Stainless steel pump shaft
Weight / Size	WZ Series Marine Multistage Self-priming Vortex pump General description WZ series is suitable for conveying at a temperature of -20c to +80c, Viscosity of not more than 5 E without solid particles, volatile, easy gasification of seawater and freshwater.It can be used for ship,petroleum,chemical industry,printing and dyeing industry, hotels, villas and high-rise living water for boiler.This type pump has the advantages of small volume,light weight,strong self-absorption,can be equipped with motor,gasoline engine,diesel engine as power.	Certificate	CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- WZ Series Marine Multistage Self-priming Vortex pump
- Model explanation
- Performance parameter
- General description
- Structural Specifications

WZ Series Marine Multistage Self-priming Vortex pump

General description

WZ series is suitable for conveying at a temperature of -20c to +80c, Viscosity of not more than 5 E without solid particles, volatile, easy gasification of seawater and freshwater.It can be used for ship,petroleum,chemical industry,printing and dyeing industry, hotels, villas and high-rise living water for boiler.This type pump has the advantages of small volume,light weight,strong self-absorption,can be equipped with motor,gasoline engine,diesel engine as power.

Model explanation

For the model 32WZ-18x3

32:inlet and outlet diameter 32mm




W: vortex pump

Z: self-priming

18: single stage head 18m

3: stage series 3

Structural Specifications

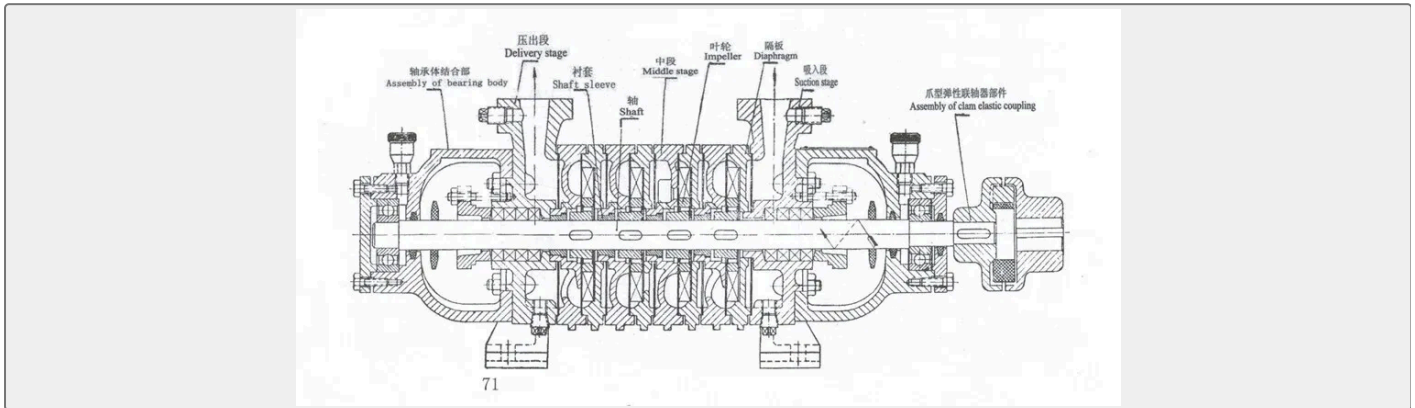

Performance parameter

Type	impeller dia.	Suc'He ad	efficienc y	weight	Capacit y	Head	Power	Capacity	Head	Power
(mm)	(m)	%	(kg)	(m3/h)	m	kw	(m3/h)	m	kw	
50hz/60hz				50hz/1450rpm			60hz/1800rpm			
20WZ-14X2	100	7.5	23	10	1.44	28	0.75	1.73	23	1.5
20WZ-14X3		7.5	23	13	1.44	42	1.1	1.73	23	2.2
20WZ-14X4		7.5	23	16	1.44	56	1.5	1.73	23	3
25WZ-16X2	110	7	28	13	2.88	32	1.5	3.46	28	3
25WZ-16X3		7	28	17.6	2.88	48	2.2	3.46	28	4
25WZ-16X4		7	28	22	2.88	64	3	3.46	28	5.5
32WZ-18X2	132	6.5	32	19	5.4	36	3	6.48	32	5.5
32WZ-18X3		6.5	32	22	5.4	54	4	6.48	32	7.5
32WZ-18X4		6.5	32	25	5.4	72	5.5	6.48	32	11
40WZ-28X2	148	6	33	38	9	56	7.5	10.8	33	15
40WZ-28X3		6	33	45	9	84	11	10.8	33	18.5
40WZ-28X4		6	33	52	9	112	15	10.8	33	22
50WZ-32X2	170	5.5	35	49	14.4	64	11	17.28	35	18.5
50WZ-32X3		5.5	35	60	14.4	96	18.5	17.28	35	30

65WZ-36X2	190	5	36	21.6	72	22	25.92	36	30
65WZ-36X3		5	36	21.6	108	20	25.92	36	45

