

CB436-2000 B type Cleat fairlead with single roller



It is used for bollard cable leading of ships

Compact design, precision machined smooth surface, easily removable shafts,


Combination type including double warping roller with plate, three warping roller with plate and more.

Paint: Grey Epoxy Primer, for the middle paint and surface according to your requirement.

Delivery time: 7-15 days after order be confirmed.

Machining facilities : CNC center, CNC lathes, ultrasonic wave cleaning etc

Drawing:

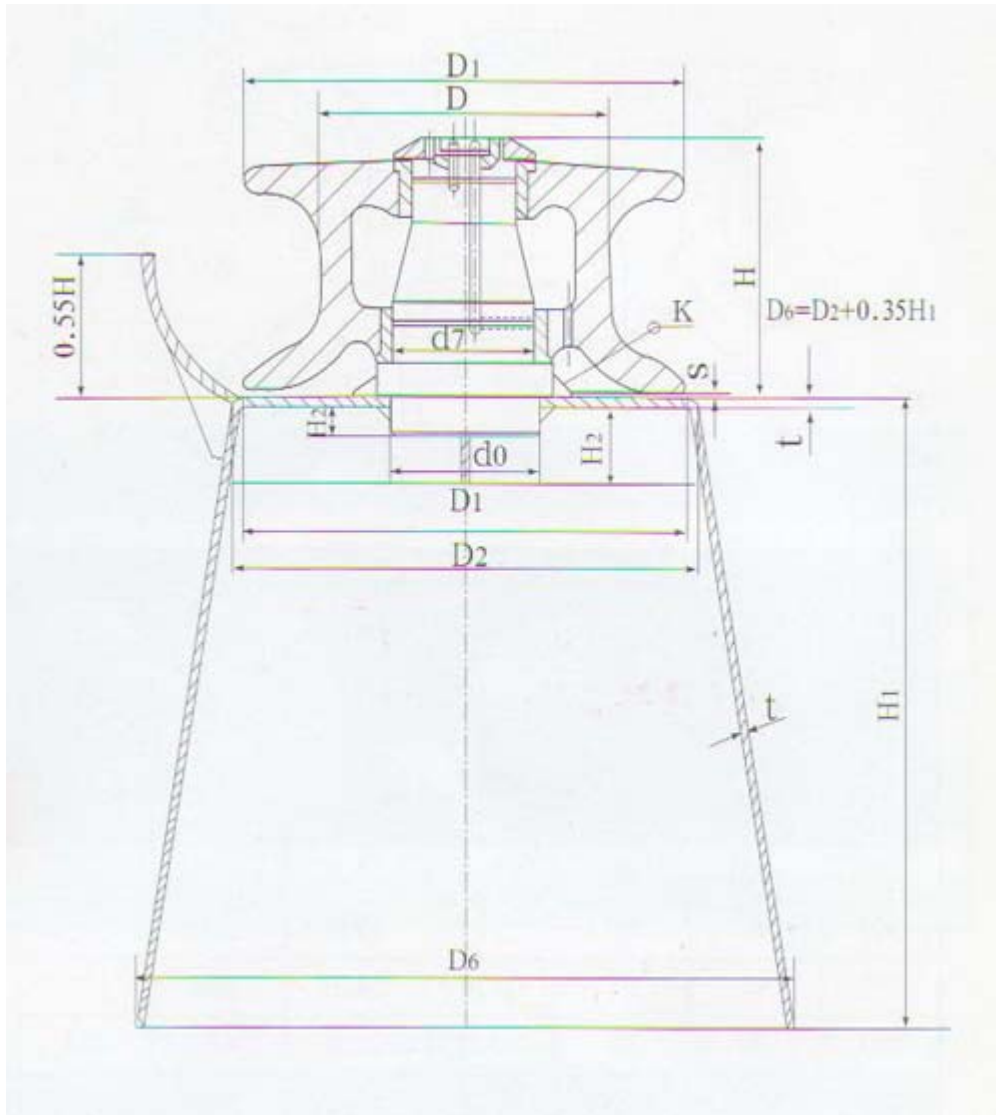

Size chart:

CB436-2000 B type Cleat fairleadwith single roller																
Product No.	Nominal Size(mm)	Steel rope GB1102 Breaking Load 1520N/mm2			Dimension								Base Roller weight weigh kg t KG H1=1000			
		6*2 4	6*3 0	6*3 7	D0	D1	D2	D7	H	H1	H2	H3	St	K		
CBRB-001	150	17	17.5	15	90	240	270	79	158		40	75	52	19	24.8	129
CBRB-002	200	22.5	21.5	19.5	115	310	340	99	186		50	85	54	110	49.3	178
CBRB-003	250	24	26	24	135	380	410	119	230	The	60	100	64	110	92	207
CBRB-004	300	30	32.5	28	155	440	470	129	255	base	60	100	76	122	127	265
CBRB-005	350	37.5	39	34.5	175	500	530	149	271	height	65	100	78	133	168	332
CBRB-006	400	41	39	39	185	560	590	159	307	is as	70	100	70	144	252.5	401
CBRB-007	450	44.5	-	43	210	630	670	179	316	per	80	120	70	144	310	452
CB436-2000 B type:Adopt GB T10105-88 marine fairlead roller																

Supply scope:

DIN 81906-1999 Fairlead roller

NS2585 Type Marine warping roller----Also known as GB 10105-88 warping roller

JIS F2014-1987 fairlead roller KOREAN WARPING ROLLER CB58-83 fairlead roller

Cleat fairlead with single roller CB436-2000 type A

Cleat fairlead with single roller CB436-2000 type B

Double Warping Roller With Plate

DIN81907 1997 Fairleads roller A type Fairlead Rollers