

OTHER MARINE VALVES & ACCESSORIES


4D180 Series Electro-Hydraulic Control Operated Valve

ISO9001 Supplier

Class Certificate

Export Supply

4D180 Series Electro-Hydraulic Control Operated Valve Principle : Mounting bolt tightening torque 22-39 N.m Weight 24.7 Kg Nominal flow 120 L/min Gear pre...

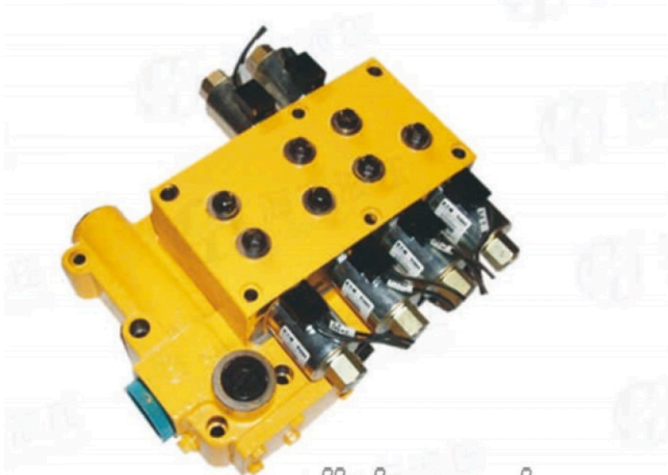

jinbomarine.com

Key Highlights

Category	Other Marine Valves & Accessories
Standard	ISO
Weight / Size	4D180 Series Electro-Hydraulic Control Operated Valve Principle : ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Other Marine Valves & Accessories	Model / SKU	4D180-Series-Electro-Hydraulic-Control-Operated-Valve
Standard	ISO	Weight / Size	4D180 Series Electro-Hydraulic Control Operated Valve Principle : Mounting bolt tightening torque 22-39 N.m Weight 24.7 Kg Nominal flow 120 L/min Gear pressure 16-20 Bar Pressure difference between gears ≤ 1 bar Pressure oscillation $\leq \pm 0.5$ bar Rated voltage DC 24 V Rated current 0.83 A (measured at rated voltage, 25 °C) Allowable voltage fluctuation range $\pm 15\%$ of rated voltage Hydraulic oil temperature range -20 ~ +100 °C Viscosity range 10 ~ 380 mm ² /s Permissible fluid contamination class -/19/16 (ISO 4406:1999) Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China 4D180 Series Electro-Hydraulic Control Operated Valve:

4D180 Series Electro-Hydraulic Control Operated Valve

Principle :

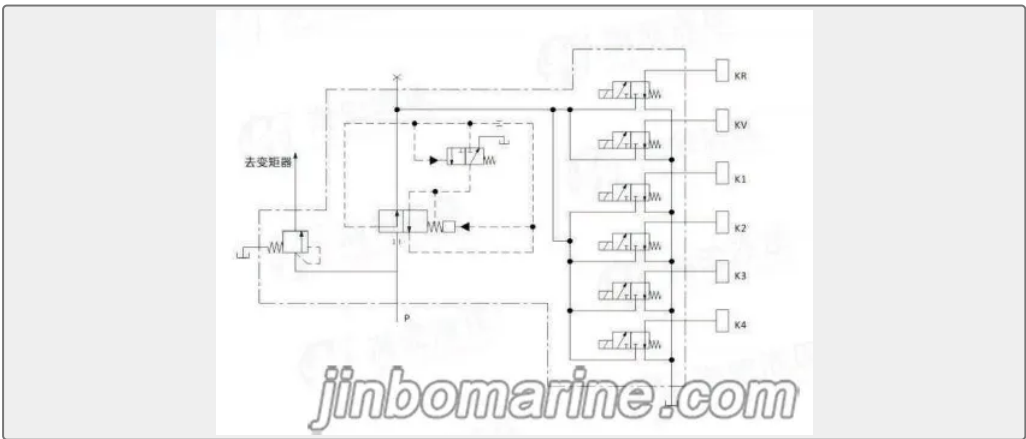

Mounting bolt tightening torque	22-39 N.m
Weight	24.7 Kg
Nominal flow	120 L/min
Gear pressure	16-20 Bar

