CHAIN SLING

# BLT081 Side Load Lifting Point

BLT081 Side Load Lifting Point Metric Thread: ITEM NO WLL/T M E A B...

ISO9001 Supplier

Class Certificate

Export Supply




## Key Highlights


| | |
|---|---|
| **Category** | Chain Sling |
| **Weight / Size** | ITEM NO WLL/T M E A B C D F G L N S SW Locking Torque /Nm Kg BLTO81-M8 0... |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

| Technical Specifications | | | |
|---|---|---|---|
| **Category** | Chain Sling | **Model / SKU** | BLT081-Side-Load-Lifting-Point |
| **Weight / Size** | ITEM NO WLL/T M E A B C D F G L N S SW Locking Torque /Nm Kg BLTO81-M8 0.3 M8x1.25 11 34 37 42 14 98.5 57 42.5 31 6 13 10-40 0.5 BLT081-M10 0.63 M10x1.5 16 34 37 44 14 98.5 57 40.5 31 6 16 10-40 0.5 BLT081-M12 1 M12x1.75 18 34 37 45 14 98.5 57 39.5 31 8 18 15-40 0.5 BLTO81-M14 1.2 M14x2.0 21 34 37 48 14 98.5 57 36.5 31 10 24 30-100 0.5 BLTO81-M16 1.5 M16x2.0 24 34 37 48 14 98.5 57 36.5 31 10 24 45-130 0.5 BLT081-M18 2 M18x2.5 26 50 54 58 16.5 143 82 68.5 45 12 30 100-170 1.3 BLT081-M20 2.5 M20x2.5 30 50 54 58 16.5 143 82 68.5 45 12 30 100-170 1.3 BLTO81-M22 3 M22x2.5 30 50 54 61 16.5 143 82 65.5 45 14 36 100-170 1.4 BLT081-M24 4 M24x3.0 36 50 54 61 16.5 143 82 65.5 45 14 36 190-280 1.4 BLTO81-M27 4 M27x3.0 38 60 65 82 22 170 99 66 59 17 46 250-500 3 BLT081-M30 5 M30x3.5 48 60 65 82 22 170 99 66 59 17 46 270-600 3 BLT081-M33 6 M33x3.5 54 60 65 85 22 170 99 63 59.5 22 55 270-600 3 BLTO81-M36S 7 M36x4.0 54 60 65 85 22 170 99 63 59.5 22 55 270-600 3.2 BLTO81-M36B 8 M36x4.0 62 77 85 104 27 226.5 123 95.5 69 22 55 270-600 6 BLT081-M39 8 M39x4.0 62 77 85 104 27 226.5 123 95.5 69 22 55 350-800 6 | **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |
| **Warranty** | 12 Months unless specified otherwise | **Origin** | China |

## China BLT081 Side Load Lifting Point:

BLT081 Side Load Lifting Point

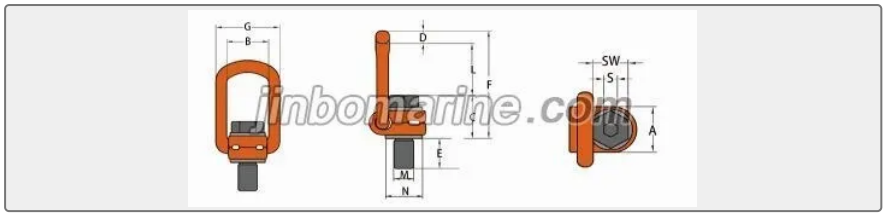


Metric Thread:

| ITEM NO | WLL/T | M | E | A | B | C | D | F | G | L | N | S | SW | Locking Torque/Nm | Kg |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| BLTO81-M8 | 0.3 | M8x1.25 | 11 | 34 | 37 | 42 | 14 | 98.5 | 57 | 42.5 | 31 | 6 | 13 | 10-40 | 0.5 |
| BLT081-M10 | 0.63 | M10x1.5 | 16 | 34 | 37 | 44 | 14 | 98.5 | 57 | 40.5 | 31 | 6 | 16 | 10-40 | 0.5 |
| BLT081-M12 | 1 | M12x1.75 | 18 | 34 | 37 | 45 | 14 | 98.5 | 57 | 39.5 | 31 | 8 | 18 | 15-40 | 0.5 |
| BLTO81-M14 | 1.2 | M14x2.0 | 21 | 34 | 37 | 48 | 14 | 98.5 | 57 | 36.5 | 31 | 10 | 24 | 30-100 | 0.5 |
| BLTO81-M16 | 1.5 | M16x2.0 | 24 | 34 | 37 | 48 | 14 | 98.5 | 57 | 36.5 | 31 | 10 | 24 | 45-130 | 0.5 |
| BLT081-M18 | 2 | M18x2.5 | 26 | 50 | 54 | 58 | 16.5 | 143 | 82 | 68.5 | 45 | 12 | 30 | 100-170 | 1.3 |

| | | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| BLT081-M20 | 2.5 | M20x2.5 | 30 | 50 | 54 | 58 | 16.5 | 143 | 82 | 68.5 | 45 | 12 | 30 | 1000-1700 | 1.3 |
| BLTO81-M22 | 3 | M22x2.5 | 30 | 50 | 54 | 61 | 16.5 | 143 | 82 | 65.5 | 45 | 14 | 36 | 1000-1700 | 1.4 |
| BLT081-M24 | 4 | M24x3.0 | 36 | 50 | 54 | 61 | 16.5 | 143 | 82 | 65.5 | 45 | 14 | 36 | 1900-2800 | 1.4 |
| BLTO81-M27 | 4 | M27x3.0 | 38 | 60 | 65 | 82 | 22 | 170 | 99 | 66 | 59 | 17 | 46 | 2500-5000 | 3 |
| BLT081-M30 | 5 | M30x3.5 | 48 | 60 | 65 | 82 | 22 | 170 | 99 | 66 | 59 | 17 | 46 | 2700-6000 | 3 |
| BLT081-M33 | 6 | M33x3.5 | 54 | 60 | 65 | 85 | 22 | 170 | 99 | 63 | 59.5 | 22 | 55 | 2700-6000 | 3 |
| BLTO81-M36S | 7 | M36x4.0 | 54 | 60 | 65 | 85 | 22 | 170 | 99 | 63 | 59.5 | 22 | 55 | 2700-6000 | 3.2 |
| BLTO81-M36B | 8 | M36x4.0 | 62 | 77 | 85 | 104 | 27 | 226.5 | 123 | 95.5 | 69 | 22 | 55 | 2700-6000 | 6 |
| BLT081-M39 | 8 | M39x4.0 | 62 | 77 | 85 | 104 | 27 | 226.5 | 123 | 95.5 | 69 | 22 | 55 | 3500-8000 | 6 |