

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

CHAIN SLING

BLT094 Key Eye Point

BLT094 Key Eye Point Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm
Locking Torque...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F W S B...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.




Technical Specifications			
Category	Chain Sling	Model / SKU	BLT094-Key-Eye-Point
Standard	EN	Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque/Nm Kg E A B C D F W S BLT094-M8 0.3 M8x1.25 12 40 25 8 9.5 26 44 6 10-40 0.12 BLT094- M10 0.4 M10x1.5 15 40 25 8 95 26 44 6 10-40 0.13 BLT094-M12 0.75 M12x1.75 18 47 30 10 11 32 52 8 15-40 0.2 BLT094-M14 0.75 M14x2.0 18 47 30 10 11 32 52 8 30-100 0.2 BLT094-M16 1.5 M16x2.0 24 54 35 14 13 39 61 10 45-130 0.4 BLT094-M18 1.5 M18x2.5 24 54 35 14 13 39 61 10 100-170 0.4 BLT094-M20 2.3 M20x2.5 30 63 40 16 15 47 70 12 100-170 0.6 BLT094-M22 2.3 M22x2.5 40 63 40 16 15 47 70 12 100-170 0.6 BLT094-M24 3.2 M24x3.0 40 73 48 19 18 55 84 14 190-280 1 BLT094-M27 3.2 M27x3.0 47 73 48 19 18 55 84 14 250-500 1 BLT094-M30 4.5 M30x3.5 47 91.5 60 24 22.5 67 105 17 270-600 1.9 BLT094-M33 4.5 M33x3.5 54 91.5 60 24 22.5 67 105 17 270-600 1.9 BLT094-M36 7 M36x4.0 54 114 72 29 27 85 126 22 270-600 3.6 BLT094-M42 9 M42x4.5 63 130 82 34 32.5 98 147 22 350-800 5.6 BLT094-M48 12 M48x5.0 72 151 96 38 36 114 168 27 350-800 8.5
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China BLT094 Key Eye Point:

BLT094 Key Eye Point



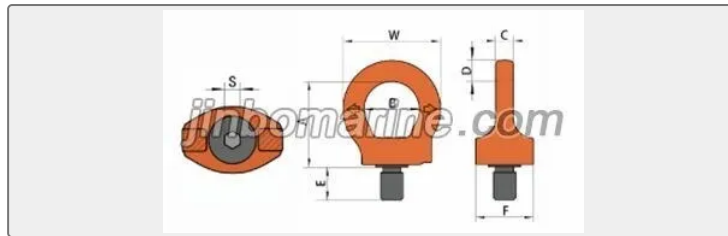

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm								Locking Torque/ Nm	Kg
			E	A	B	C	D	F	W	S		
BLT094-M8	0.3	M8x1.25	12	40	25	8	9.5	26	44	6	10-40	0.12
BLT094-M10	0.4	M10x1.5	15	40	25	8	9.5	26	44	6	10-40	0.13
BLT094-M12	0.75	M12x1.75	18	47	30	10	11	32	52	8	15-40	0.2
BLT094-M14	0.75	M14x2.0	18	47	30	10	11	32	52	8	30-100	0.2
BLT094-M16	1.5	M16x2.0	24	54	35	14	13	39	61	10	45-130	0.4
BLT094-M18	1.5	M18x2.5	24	54	35	14	13	39	61	10	100-170	0.4
BLT094-M20	2.3	M20x2.5	30	63	40	16	15	47	70	12	100-170	0.6
BLT094-M22	2.3	M22x2.5	40	63	40	16	15	47	70	12	100-170	0.6
BLT094-M24	3.2	M24x3.0	40	73	48	19	18	55	84	14	190-280	1
BLT094-M27	3.2	M27x3.0	47	73	48	19	18	55	84	14	250-500	1
BLT094-M30	4.5	M30x3.5	47	91.5	60	24	22.5	67	105	17	270-600	1.9
BLT094-M33	4.5	M33x3.5	54	91.5	60	24	22.5	67	105	17	270-600	1.9
BLT094-M36	7	M36x4.0	54	114	72	29	27	85	126	22	270-600	3.6
BLT094-M42	9	M42x4.5	63	130	82	34	32.5	98	147	22	350-800	5.6
BLT094-M48	12	M48x5.0	72	151	96	38	36	114	168	27	350-800	8.5