

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

IEC 60092 STANDARD CABLE (CHINA TYPE)


CJ96/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured)

ISO9001 Supplier

Class Certificate

Export Supply

CJ96/NC Cable is Galvanized Steel Wire Braided Marine Power Cable, the color of cable is red, black, grey and blue. Cable Construction Conductor: Tinned Copper. IEC 60228 Class 2...

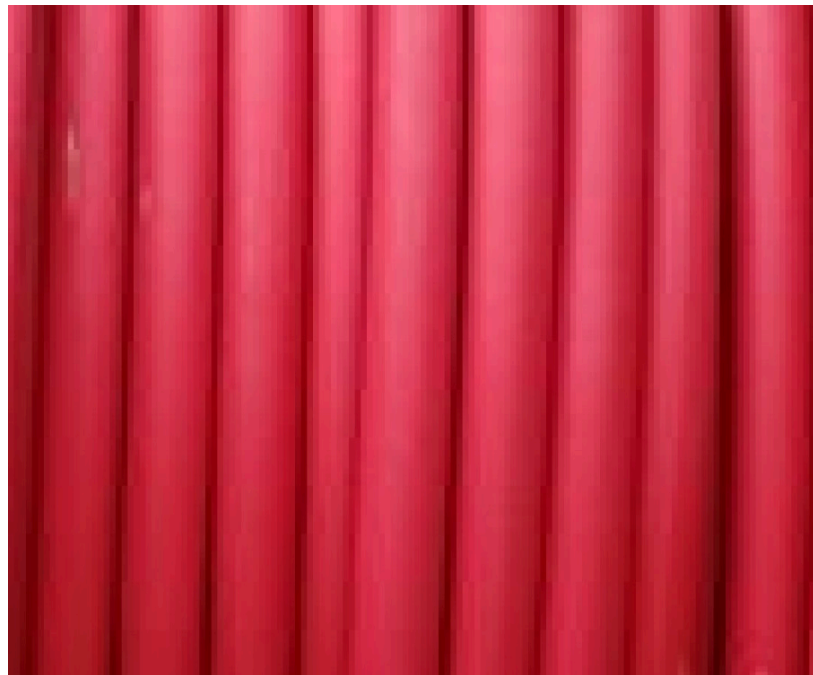

Key Highlights

Category	IEC 60092 Standard Cable (China Type)
Standard	DIN
Material	Tinned Copper/XLPE insulation/Galvanized Steel Wire Braided/SHF1 Sheath
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	IEC 60092 Standard Cable (China Type)	Model / SKU	CJ96-NC-Fire-Resistant-Marine-Power-Lighting-Cable-0-6-1KV-Armoured
Standard	DIN	Material	Tinned Copper/XLPE insulation/Galvanized Steel Wire Braided/SHF1 Sheath
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:	Surface	Galvanized
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- China CJ96/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured):
- Standards
- Features
- Cable Construction
- Cores & Size
- Delivery

China CJ96/NC Fire Resistant Marine Power & Lighting Cable 0/6/1KV(Armoured):



CJ96/NC Cable is Galvanized Steel Wire Braided Marine Power Cable, the color of cable is red, black, grey and blue.

Cable Construction

Conductor: Tinned Copper. IEC 60228 Class 2

Mica Tape

Insulation : XLPE Insulation

Inner Covering: None

Armour : Galvanized Steel Wire Braided

Outer Sheath : Halogen-free Cross Linked Thermoplastic Polyolefin(SHF1)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60331

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

Features

Halogen-free, Low Smoke, Fire-Retardant.

Delivery

We can delivery around the world according to Incoterms 2010.