

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

HOOK

Clevis Grab Hooks H330

Similar Name US Type Clevis Grab Hooks H330 Clevis Grab Hooks H330 Drop Forged Clevis Grab Hooks H330 Galv Clevis Grab Hooks H330 Main Specification Compromise of Body an...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Hook
Standard	EN
Material	45# Steel
Weight / Size	Similar Name US Type Clevis Grab Hooks H330 Clevis Grab Hooks H330 Drop ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	Hook	Model / SKU	Clevis-Grab-Hooks-H330
Standard	EN	Material	45# Steel
Weight / Size	Similar Name US Type Clevis Grab Hooks H330 Clevis Grab Hooks H330 Drop Forged Clevis Grab Hooks H330 Galv Clevis Grab Hooks H330 Main Specification Compromise of Body and Pin Forging Technology 45# Steel Size Table Size of Chain WLL(lbs) DIMENSIONS(in) Weight (lbs) H-330 A-330 B E P R 1/4" 2,600 3,600 7/16 11/32 3/8 1-13/16 0.38 5/16" 3,900 5,400 1/2 7/16 3/8 2-5/32 0.7 3/8" 5,400 7,500 19/32 1/2 7/16 2-15/32 1.04 7/16" 7,200 10,000 21/32 9/16 9/16 2-25/32 1.31 1/2" 9,200 12,750 3/4 5/8 5/8 3-7/32 2.06 5/8" 12,750 19,000 29/32 3/4 3/4 4-3/32 4.25 3/4" 18,500 27,000 15/16 15/16 7/8 4 5/8 6.5	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- Similar Name
- Size Table
- Main Specification

Similar Name

US Type Clevis Grab Hooks H330

Clevis Grab Hooks H330

Drop Forged Clevis Grab Hooks H330

Galv Clevis Grab Hooks H330


Main Specification

Compromise of Body and Pin

Forging Technology

45# Steel

Size Table

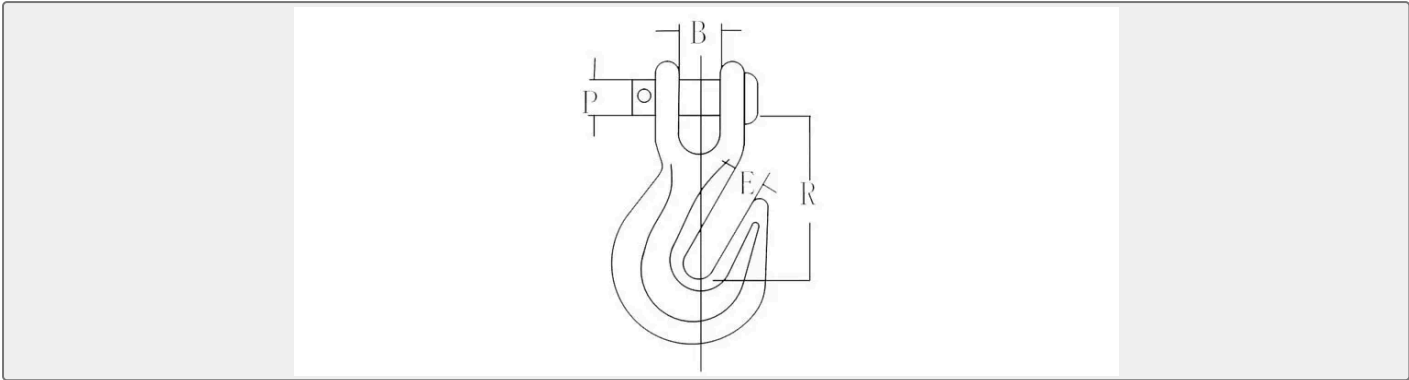

Size of Chain	WLL(lbs)		DIMENSIONS(in)				Weight (lbs)
	H-330	A-330	B	E	P	R	
1/4"	2,600	3,600	7/16	11/32	3/8	1-13/16	0.38
5/16"	3,900	5,400	1/2	7/16	3/8	2-5/32	0.7
3/8"	5,400	7,500	19/32	1/2	7/16	2-15/32	1.04
7/16"	7,200	10,000	21/32	9/16	9/16	2-25/32	1.31
1/2"	9,200	12,750	3/4	5/8	5/8	3-7/32	2.06
5/8"	12,750	19,000	29/32	3/4	3/4	4-3/32	4.25
3/4"	18,500	27,000	15/16	15/16	7/8	4 5/8	6.5