

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

## TURNBUCKLE

# Commercial Type Turnbuckle

Main Specification Turnbuckle usually Forged, Free forged and Casting. The surface of turnbuckle original color, galvanised,hot galvanized Material is 45# Steel, Q235 Size Table ...

ISO9001 Supplier

Class Certificate

Export Supply



### Key Highlights

Category	Turnbuckle
Material	45# Steel, Q235
Weight / Size	The surface of turnbuckle original color, galvanised,hot galvanized Mate...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
<b>Category</b>	Turnbuckle	<b>Model / SKU</b>	Commercial-Type-Turnbuckle
<b>Material</b>	45# Steel, Q235	<b>Weight / Size</b>	The surface of turnbuckle original color, galvanised,hot galvanized Material is 45# Steel, Q235 Size Table SWL kg Specification B V D E L Weight kg 100 6*100mm 145 215 12 10 100 0.16 200 8*125mm 185 280 14 12 125 0.24 300 10*150mm 210 325 16 14 150 0.39 400 12*200mm 275 430 19 18 200 0.64 500 16*250mm 345 540 23 24 250 1.44 600 20*300mm 435 670 28 26 300 2.45 700 22*320mm 480 740 34 32 325 3.6 800 24*350mm 555 830 36 36 350 5
<b>Surface</b>	galvanized	<b>Certificate</b>	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China

<b>CONTENTS</b>	<input checked="" type="checkbox"/> Main Specification <input type="checkbox"/> Size Table
-----------------	--


## Main Specification

Turnbuckle usually Forged, Free forged and Casting.

The surface of turnbuckle original color, galvanised,hot galvanized

Material is 45# Steel, Q235

## Size Table

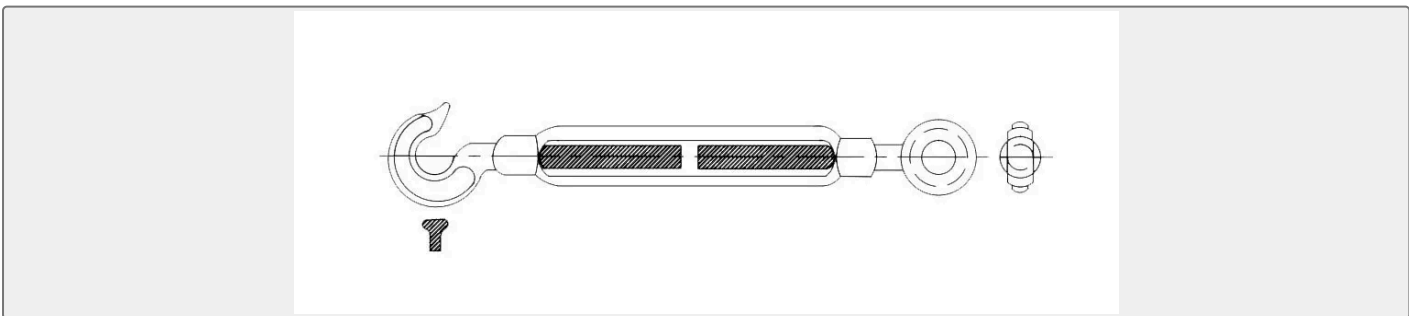

SWL kg	Specification	B	V	D	E	L	Weight kg
100	6*100mm	145	215	12	10	100	0.16
200	8*125mm	185	280	14	12	125	0.24

300	10*150mm	210	325	16	14	150	0.39
500	12*200mm	275	430	19	18	200	0.64
1000	16*250mm	345	540	23	24	250	1.44
1500	20*300mm	435	670	28	26	300	2.45
2200	22*320mm	480	740	34	32	325	3.6
3000	24*350mm	555	830	36	36	350	5