

# Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

JIS C 3410 CABLE

## FA-DPYC Double Core Flame Retardant Marine Power & Light Cable 0.6/1KV

JIS C 3410-1999 Marine Power & Lighting Cable 0.6/1KV FA-DPY Double Core EPR Insulation PVC Sheath Flame Retardant Power & Lighting Cable 0.6/1KV FA-DPYC Double Core EPR Insulatio...

ISO9001 Supplier

Class Certificate

Export Supply

### Key Highlights

Category	JIS C 3410 Cable
Standard	JIS
Material	Tinned Copper/EPR insulation/PVC sheath/Galvanized Steel Wire Braided/PV...
Weight / Size	IEC 60332-1 & IEC 60332-3 Category A Cores & Size Number of Conductor:
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	JIS C 3410 Cable	Model / SKU	FA-DPYC-Double-Core-Flame-Retardant-Marine-Power-Light-Cable-0-6-1KV
Standard	JIS	Material	Tinned Copper/EPR insulation/PVC sheath/Galvanized Steel Wire Braided/PVC Protective Covering
Weight / Size	IEC 60332-1 & IEC 60332-3 Category A Cores & Size Number of Conductor:	Surface	Galvanized
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS		
■ China FA-DPYC Double Core Flame Retardant Marine Power & Light Cable 0.6/1KV:	■ Cable Construction	
■ Standards	■ Cores & Size	
■ Feature	■ Maximum Working Voltage and Testing Voltage	
■ Minimum Bending Radius	■ Application:	

## China FA-DPYC Double Core Flame Retardant Marine Power & Light Cable 0.6/1KV:

JIS C 3410-1999 Marine Power & Lighting Cable

- 0.6/1KV FA-DPY Double Core EPR Insulation PVC Sheath Flame Retardant Power & Lighting Cable
- 0.6/1KV FA-DPYC Double Core EPR Insulation PVC Sheath Galvanized Steel Wire Braided Flame Retardant Power & Lighting Cable
- 0.6/1KV DPY Double Core EPR Insulation PVC Sheath Power & Lighting Cable
- 0.6/1KV DPYC Double Core EPR Insulation PVC Sheath Galvanized Steel Wire Braided Power & Lighting Cable

## Cable Construction

Classification	Code	Construction details
Conductor	D	Tinned Copper Wire JIS C3410
Insulation	P	EPR as per JIS C 3410
Sheath	Y	PVC as per JIS C 3410
Aarmor	C	Galvanized steel wire braided

CB	Tinned copper wire braided	
Paint	The white paint should be painted uniformly	
Covering	Y	PVC as per JIS C 3410
Color: Black		

## Standards

Design : JIS C 3410(1999)

Flammability: IEC 60332-1 & IEC 60332-3 Category A

## Cores & Size

Number of Conductor: 2 Core

Size of Conductor (mm<sup>2</sup>): 1.5 2.5 4 6 10 16 25 35 50 70 95 120 150 185 240 300

## Feature

Halogen-free, Low Smoke, Flame retardant


## Maximum Working Voltage and Testing Voltage

Nominal voltage (V)	Maximum working voltage (V)		(Test voltage) V/min.
	a.c	d.c	
250V	250V	450V	1500/5
0.6/1 kV	0.6/1 kV	0.9/1.5kV	3500/5

## Minimum Bending Radius

The bending radius for the installation of cables should be not less than the values given as follows :

Type of cable		Minimum bending radius
Up to 1.8/3kV	Unarmored or unbraided	
	D ≤ 25mm	4XD
	D > 25mm	6XD
	Metal braid screened or armored	6XD
	Tape screened	8XD
3.6/6kV	Single core	12XD
above	3-core	9XD

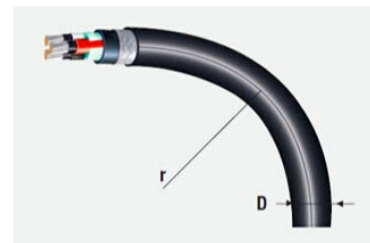

NOTE) D : Overall diameter of cable

## **Application:**

The cable is fixed installation, used for power, lighting and control in most area and open deck area in ship.