

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

FILTER

GPL40 Fuel Filter

GPL40 Fuel Filter The fuel enters the inlet of the filter,through the transfer value into the oil chamber of the filter,and into the cleaning oil chamber through the metal filter core from the outside to the inside...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

| | |
|---------------|---|
| Category | Filter |
| Standard | EN |
| Material | Filter medium Work temperature Work pressure Filter precision Flow light... |
| Weight / Size | GPL40 Fuel Filter Structure Diagram GPL40 Fuel Filter Technical paramete... |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

| Technical Specifications | | | |
|--------------------------|---|--------------------|---|
| Category | Filter | Model / SKU | GPL40-Fuel-Filter |
| Standard | EN | Material | Filter medium Work temperature Work pressure Filter precision Flow light-heavy oil 150°C 16bar 37um 1.5~3m³/h Filter core,filter screen adopt stainless steel,the washer adopts Viton. |
| Weight / Size | GPL40 Fuel Filter Structure Diagram GPL40 Fuel Filter Technical parameters Model Over size(mm) Installing size(mm) L1 H4 H H1 H2 H3 D1 N-D1 L2 N-D GPL32A 300 480 650 138 270 80 80 4-M10 160 2-14 GPL32AG GPL40 300 537 750 138 297 120 100 4-M12 160 2-14 | Surface | GPL40 Fuel Filter The fuel enters the inlet of the filter,through the transfer value into the oil chamber of the filter,and into the cleaning oil chamber through the metal filter core from the outside to the inside, then into the fuel system of diesel engine,the pressure difference of the inlet and the outlet of the filter is 0.05-0.10MPa, when it surpasses 0.10Mpa, the handle must be turned a round anticlockwise,the dirt on the surface of the metal core is bladed,the pressure difference falls,if the result is not good,the metal core can be disaeesmbled and washed. |
| Certificate | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | Warranty | 12 Months unless specified otherwise |
| Origin | China | | |


| | | |
|-----------------|--|---------------------------------------|
| CONTENTS | ■ GPL40 Fuel Filter | ■ GPL40 Fuel Filter Structure Diagram |
| | ■ GPL40 Fuel Filter Technical parameters | |

GPL40 Fuel Filter

The fuel enters the inlet of the filter,through the transfer value into the oil chamber of the filter,and into the cleaning oil chamber through the metal filter core from the outside to the inside, then into the fuel system of diesel engine,the pressure difference of the inlet and the outlet of the filter is 0.05-0.10MPa, when it surpasses 0.10Mpa, the handle must be turned a round anticlockwise,the dirt on the surface of the metal core is bladed,the pressure difference falls,if the result is not good,the metal core can be disaeesmbled and washed.

| Filter medium | Work temperature | Work pressure | Filter precision | Flow |
|--|------------------|---------------|------------------|-----------|
| light-heavy oil | 150°C | 16bar | 37um | 1.5~3m³/h |
| Filter core,filter screen adopt stainless steel,the washer adopts Viton. | | | | |

GPL40 Fuel Filter Structure Diagram

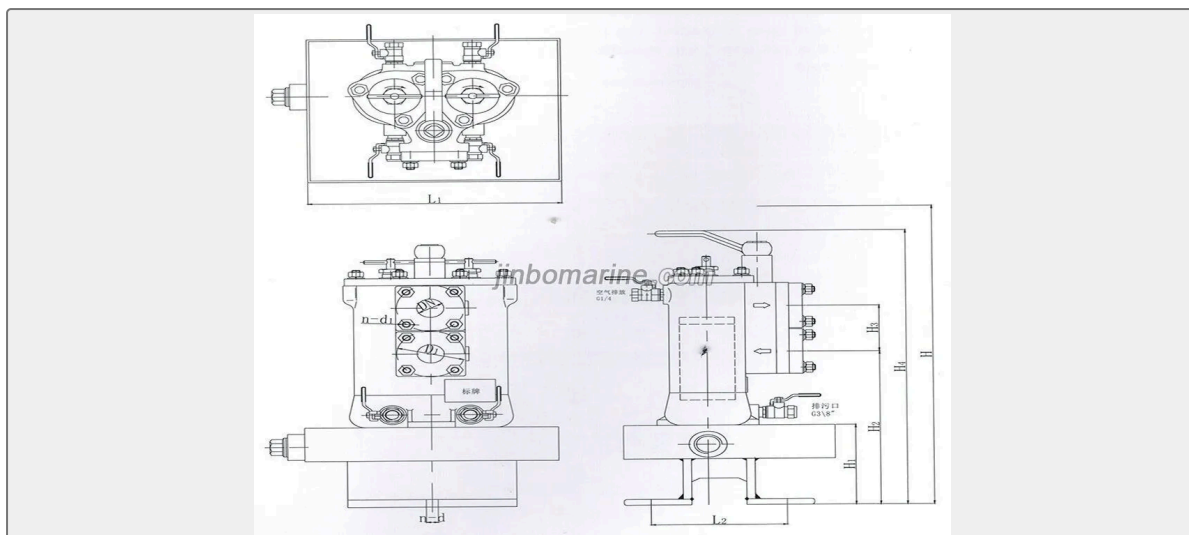

GPL40 Fuel Filter Technical parameters

| Model | Over size(mm) | | | Installing size(mm) | | | | | | |
|---------|---------------|-----|-----|---------------------|-----|-----|-----|-------|-----|------|
| | L1 | H4 | H | H1 | H2 | H3 | D1 | N-D1 | L2 | N-D |
| GPL32A | 300 | 480 | 650 | 138 | 270 | 80 | 80 | 4-M10 | 160 | 2-14 |
| GPL32AG | | | | | | | | | | |
| GPL40 | 300 | 537 | 750 | 138 | 297 | 120 | 100 | 4-M12 | 160 | 2-14 |