

# Jinbo Marine

Marine &amp; Offshore Equipment Datasheet

PRODUCT DATASHEET

DIN 81958/89159 CABLE

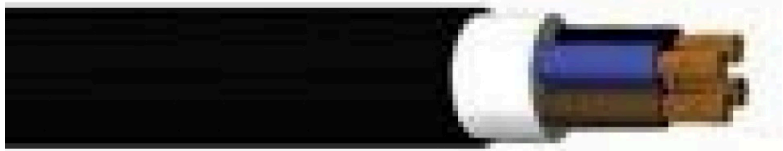
## MGG Ship Power Cable without Screen 0.6/1kv

ISO9001 Supplier

Class Certificate

Export Supply

Reliable Marine Cable Supplier and Stockist, MGG and MGH Type; Cheap Price and Fast Delivery. You also can find other other marine cable here.

	Key Highlights	
	<b>Category</b>	DIN 81958/89159 Cable
	<b>Standard</b>	DIN
	<b>Material</b>	Tinned Copper/EPR insulation/Polyolefin sheath
	<b>Weight / Size</b>	IEC 60332-3-22 DIN 89160/98 Cores & Size Cores:
<b>Certificate</b>	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS	
<p>We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.</p>		

Technical Specifications			
<b>Category</b>	DIN 81958/89159 Cable	<b>Model / SKU</b>	MGG-Ship-Power-Cable-without-Screen-0-6-1kv
<b>Standard</b>	DIN	<b>Material</b>	Tinned Copper/EPR insulation/Polyolefin sheath
<b>Weight / Size</b>	IEC 60332-3-22 DIN 89160/98 Cores & Size Cores:	<b>Certificate</b>	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS
<b>Warranty</b>	12 Months unless specified otherwise	<b>Origin</b>	China

CONTENTS	
<ul style="list-style-type: none"> <li>■ China MGG Ship Power Cable without Screen 0.6/1kv:</li> <li>■ Cable Construction</li> <li>■ Cores &amp; Size</li> </ul>	<ul style="list-style-type: none"> <li>■ Technical Specification:</li> <li>■ Standards</li> <li>■ Core Identification:</li> </ul>



## China MGG Ship Power Cable without Screen 0.6/1kv:



MGG Cable is shipboard power cable without screen, voltage is 0.6/1KV, used for power and lighting in shipbuilding and ship repairing. We can delivery to everywhere according to INCOTERMS 2010.

### Technical Specification:

#### Cable Construction

Conductor: Tinned copper, class 2.

Insulation: EPR Insulation.

Bedding: Tape

Outer Sheath: Halogen-free Polyolefin(SHF1)

#### Standards

IEC 60092-351; IEC 60092-353; IEC 60092-359; IEC 60332-3-22

DIN 89160/98

#### Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24

Size (sqmm): 1.5, 2.5, 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

#### Core Identification:

1 core: natural colour

2 cores: black / blue

3 cores: black / blue / brown

4 cores: black / blue / brown / black

5 cores: black / blue / brown / black / black

7 to 24 cores: printed with numbers