

MXG/Y100A/ MXG/Y150A Three-Phase Full-Bridge Rotating Rectifier Module

A black, semi-circular metal component, likely a part of a marine engine or pump assembly. It features four mounting bolts (two on each side) and a central circular hole. The component is shown against a white background.


Category	Sensor
Standard	ISO
Weight / Size	MXG/Y100A/ MXG/Y150A Three-Phase Full-Bridge Rotating Rectifier Module ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Category	Sensor	Model / SKU	MXG-Y100A-MXG-Y150A-Three-Phase-Full-Bridge-Rotating-Rectifier-Module
Standard	ISO	Weight / Size	MXG/Y100A/ MXG/Y150A Three-Phase Full-Bridge Rotating Rectifier Module Size :
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

MXG/Y100A/ MXG/Y150A Three-Phase Full-Bridge Rotating Rectifier Module

Size :

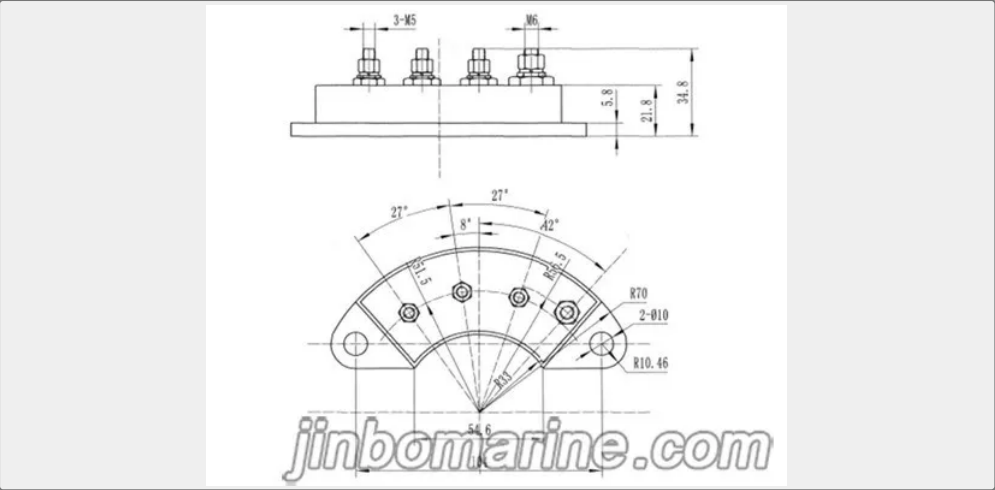

Principle :

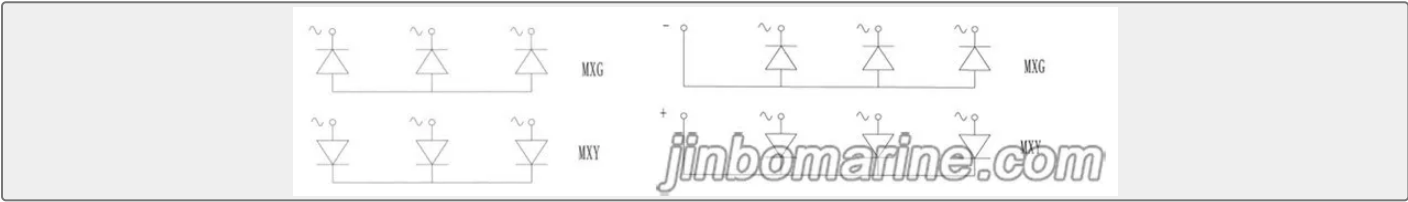

Type	Parameter											
	IF(AV)	IFSM	I2t	VRRM	IRRM	VFM	Tj	Rjc	VISO	F-L		
	A	A	A2S	V	mA	V	°C	°C/W	V	Fitting Module N.m	Electro de Connec tion N.m	

MX G/Y	25	570	1.6x10 ₃	800~1 800	≤2	≤1.20	-40~15 0	0.45	4.5	2.3		
	40	750	2.8x10 ₃		≤4	≤1.30		0.35	4.5	2.3		
	40 press-pack	900	4.0x10 ₃		≤4	≤1.30		0.45	4.5	3.5		
	50	940	5.0x10 ₃		≤4	≤1.30		0.3	4.5	3.5		
	50 press-pack	1200	7.2x10 ₃		≤4	≤1.30		0.4	4.5	3.5		
	70 press-pack	1540	11.8x10 ₃		≤4	≤1.30		0.35	4.5	3.5		
	40(1)	750	2.8x10 ₃		≤4	≤1.30		0.35	≥2500	4.5	3.5	
	50(2)	940	5.0x10 ₃		≤4	≤1.30		0.3		4.5	3.5	
	100 press-pack	2200	24.0x10 ₃		≤5	≤1.65		0.4		4.5	3.5	
	150 press-pack	3400	56.0x10 ₃		≤8	≤1.80		0.5		4.5	3.5	