

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

JIS MARINE STRAINER & FILTER

Marine Can Water Filter JIS 7121 S Type 5K (DN25-DN100)

ISO9001 Supplier

Class Certificate

Export Supply

Marine Can Water Filter JIS F7121 also can be called as marine sea water filter or marine basket water filter. Design Standard: JIS F7121-1996 Test Standard: JIS 7200-1996 Hydraulic Test Pressure: Body- ...



Key Highlights

Category	JIS Marine Strainer & Filter
Standard	JIS
Material	cast iron
Weight / Size	Body- 0.3Mpa Flange size as per JIS B2220 - 5K Main Material:
Certificate	CCS,BV,GL,NK,RINA,ABS,DN V,LR

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	JIS Marine Strainer & Filter	Model / SKU	Marine-Can-Water-Filter-JIS-7121-S-Type-5K-DN25-DN100
Standard	JIS	Material	cast iron
Weight / Size	Body- 0.3Mpa Flange size as per JIS B2220 - 5K Main Material:	Certificate	CCS,BV,GL,NK,RINA,ABS,DNV,LR
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Marine Can Water Filter JIS 7121 S Type 5K (DN25-DN100):
- Main Size List(mm):
- Main Material:



Marine Can Water Filter JIS 7121 S Type 5K (DN25-DN100) Drawing

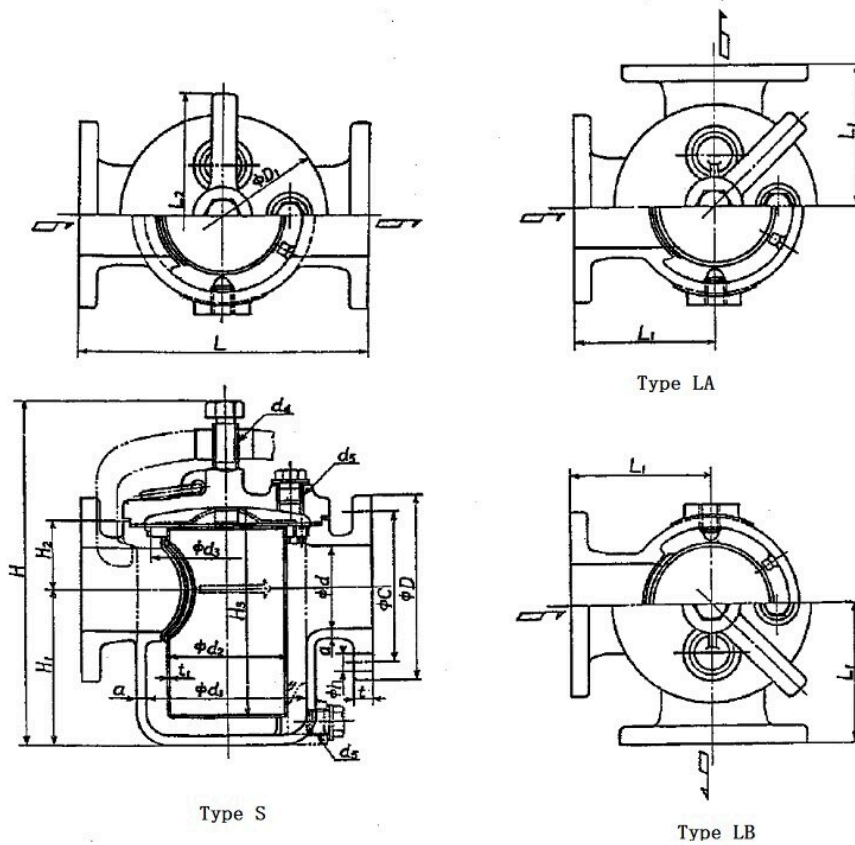

China Marine Can Water Filter JIS 7121 S Type 5K (DN25-DN100):

Marine Can Water Filter JIS F7121 also can be called as marine sea water filter or marine basket water filer.

Design Standard: JIS F7121-1996

Test Standard: JIS 7200-1996

Hydraulic Test Pressure: Body- 0.3Mpa

Flange size as per JIS B2220 - 5K

Main Material:

Body: Cast Iron (FC200)

Bonnet: Cast Iron (FC200)

Strainer: Stainless Steel (SUS304)

Gasket: non-asbestos

Yoke: FCD450

Air Vent Plug: Brass

Drain Plug: Brass

Main Size List(mm):

DN	d	L	L1	D	C	h	t	 0.051713s
----	---	---	----	---	---	---	---	---

25	25	170	85	95	75	12	14	191
32	32	190	95	115	90	15	16	218
40	40	190	95	120	95	15	16	218
50	50	200	100	130	105	15	16	239
65	65	250	125	155	130	15	18	306
80	80	270	135	180	145	19	18	341
100	100	320	160	200	165	19	20	401