

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE DOOR

Marine Steel Quick Acting Watertight Door

ISO9001 Supplier

Class Certificate

Export Supply

Standard: GB/T3477-1996 for reference Marine Steel Quick Acting Watertight Door with hand wheel is used for upper structure of ship and constructions on land, drilling platform and basement.It can be opened and clo...



Key Highlights

Category	Marine Door
Standard	GB
Material	Steel
Weight / Size	Carbon Steel or Stainless Steel Main Size List(mm):
Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Marine Door	Model / SKU	Marine-Steel-Quick-Acting-Watertight-Door
Standard	GB	Material	Steel
Weight / Size	Carbon Steel or Stainless Steel Main Size List(mm):	Certificate	CCS, BV, ABS, GL, LR, DNV, NK,RINA, KR,IRS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

- China Marine Steel Quick Acting Watertight Door:
- Main Material:
- Main Size List(mm):



China Marine Steel Quick Acting Watertight Door:

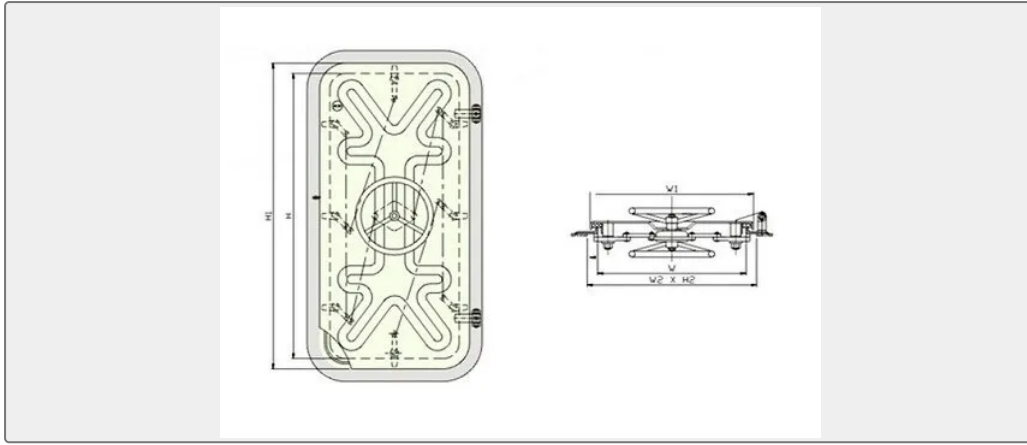

Standard: GB/T3477-1996 for reference

Marine Steel Quick Acting Watertight Door with hand wheel is used for upper structure of ship and constructions on land, drilling platform and basement. It can be opened and closed quickly and lightly, meet the requirements of International Load Line Convention 1966, the water pressure that can bear is 0.05Mpa to 0.15Mpa.

Main Material:

Door frame: Steel

Door Leaf: Steel

Handwheel: Carbon Steel or Stainless Steel

Main Size List(mm):

Size of Doorway	Size of Door	Opening Size of Wall	Thickness of Door	Weight
1200x600	1245x645	1280x680 R140	8	142
1400x600	1445x645	1480x680 R140	8	154
1400x600	1445x645	1480x680 R140	10	165
1400x700	1445x745	1480x780 R140	8	177
1400x700	1445x745	1480x780 R140	10	185
1500x600	1545x645	1580x680 R140	8	162
1500x600	1545x645	1580x680 R140	10	172
1500x700	1545x745	1580x780 R140	8	187
1500x700	1545x745	1580x780 R140	10	195
1500x800	1545x845	1580x880 R140	8	205
1500x800	1545x845	1580x880 R140	10	221
1600x600	1645x645	1680x680 R140	8	173
1600x600	1645x645	1680x680 R140	10	181
1600x700	1645x745	1680x780 R140	8	



0.040494s

1600x700	1645x745	1680x780 R140	10	207
1600x800	1645x845	1680x880 R140	8	211
1600x800	1645x845	1680x880 R140	10	238
The size also can be customerized.				

Door Container Stuffing

