

OTHER MARINE VALVES & ACCESSORIES


PDF15 Monostable Charging Valve

PDF15 Monostable Charging Valve This valve integrates a monostable valve and a single-circuit charging valve. Oil from the pump port is diverted to provide a stable flow to the charging valve for accumulator cha...

ISO9001 Supplier

Class Certificate

Export Supply

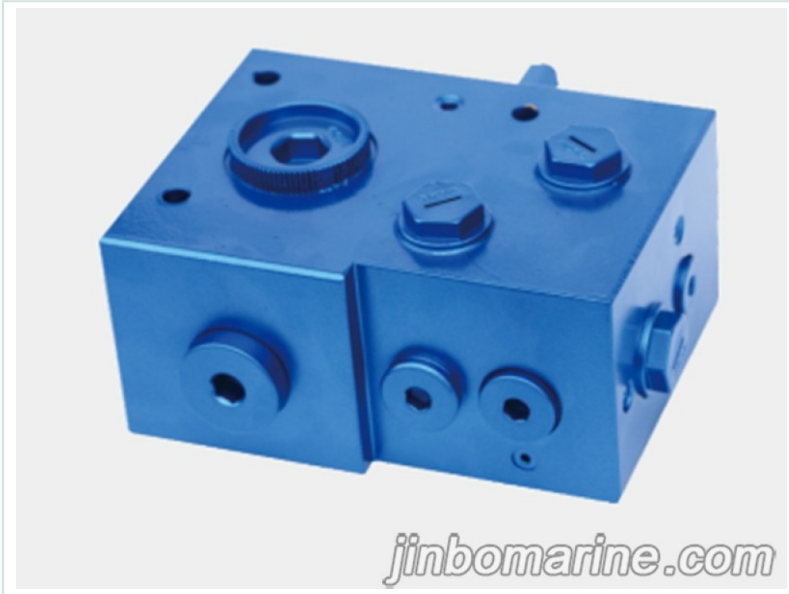

Key Highlights

Category	Other Marine Valves & Accessories
Standard	GB
Weight / Size	Approximate Weight 9Kg
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Other Marine Valves & Accessories	Model / SKU	PDF15-Monostable-Charging-Valve
Standard	GB	Weight / Size	Approximate Weight 9Kg
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China PDF15 Monostable Charging Valve:

PDF15 Monostable Charging Valve

This valve integrates a monostable valve and a single-circuit charging valve. Oil from the pump port is diverted to provide a stable flow to the charging valve for accumulator charging. Upon completion of charging, pressure is relieved via port N. The remaining flow is delivered to the working system through port EF. With a single pump operation, both the brake system and working system requirements can be satisfied.

Principle :

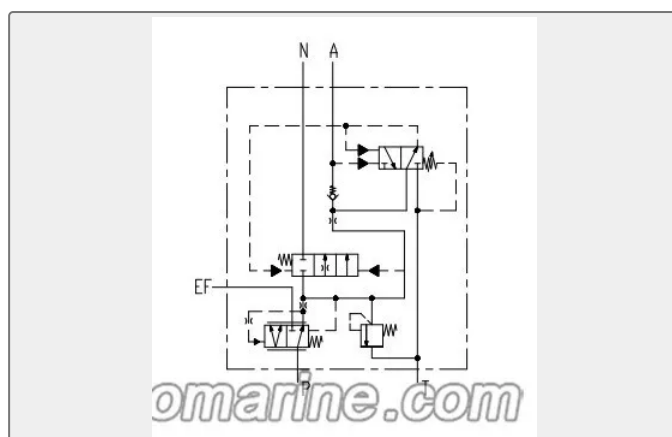

Nominal Flow	90 L/min
Return-line Back Pressure	≤ 0.5 MPa
Viscosity Range	10-380 mm ² /s
Temperature Range	-20 °C ~ 100 °C
Oil Fluid Cleanliness	The solid-particle contamination level of oil fluid and system shall not exceed GB/T 14039-2002-/19/16 or NAS 1638 Class 10.
Approximate Weight	9Kg