

OTHER MARINE VALVES & ACCESSORIES

PDF18 Parking Brake Valve

PDF18 Parking Brake Valve This is a two-position three-way directional control valve, used in conjunction with a reverse-adjusting hydraulic control valve. It enables normal vehicle travel and parking functions ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Other Marine Valves & Accessories
Standard	GB
Weight / Size	Approximate Weight 1.8Kg
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications


Category	Other Marine Valves & Accessories	Model / SKU	PDF18-Parking-Brake-Valve
Standard	GB	Weight / Size	Approximate Weight 1.8Kg
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China PDF18 Parking Brake Valve:

PDF18 Parking Brake Valve

This is a two-position three-way directional control valve, used in conjunction with a reverse-adjusting hydraulic control valve. It enables normal vehicle travel and parking functions by connecting or cutting off the oil circuit. Its operating handle is similar to the parking handbrake of an automobile. A self-locking mechanism is fitted at the parking position to prevent mis-operation, combining good appearance with practical performance.

Principle :

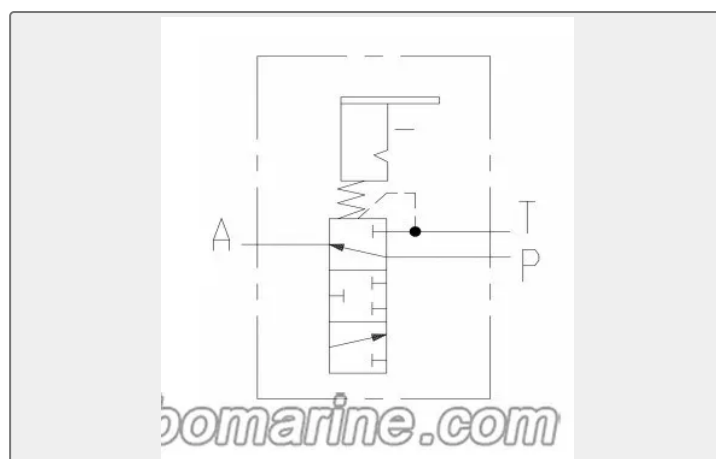

Max. Pressure at Port P	20 MPa
Nominal Flow	25 L/min
Return-line Back Pressure	≤ 0.5 MPa
Viscosity Range	10-380 mm ² /s
Temperature Range	-20 °C ~ 100 °C
Oil Fluid Cleanliness	The solid-particle contamination level of oil fluid and system shall not exceed GB/T 14039-2002-/19/16 or NAS 1638 Class 10.
Approximate Weight	1.8Kg