

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

MARINE AIR RECEIVER

Type B Horizontal Marine Air Receiver

B style is made up of steel body, end, manhole for easy examination and repair set in end, inlet/outlet valve, safety valve, Pressure gauge and pressure gauge valve, drain valve and installation seat etc. ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights


Category	Marine Air Receiver
Standard	EN
Material	Steel
Weight / Size	Mpa Inner Dia mm Height mm Weight kg B B0.63-1.0 0.63 1 700 1370 480 B0....
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Marine Air Receiver	Model / SKU	Type-B-Horizontal-Marine-Air-Receiver
Standard	EN	Material	Steel
Weight / Size	Mpa Inner Dia mm Height mm Weight kg B B0.63-1.0 0.63 1 700 1370 480 B0.80-1.0 0.8 700 1370 520 B1.00-1.0 1 800 1490 685 B0.63-3.0 0.63 3 700 1470 680 B0.80-3.0 0.8 700 1470 780 B1.00-3.0 1 800 1580 950 B1.60-3.0 1.6 900 1680 1180 B2.50-3.0 2.5 1100 1940 1925 B4.00-3.0 4 1200 2040 3400 B4.50-3.0 4.5 1200 2040 3750 B5.00-3.0 5 1200 2040 4100 B6.30-3.0 6.3 1400 2265 4230 B8.00-3.0 8 1500 2365 4930 B10.00-3.0 10 1600 2505 6785 B12.00-3.0 12 1700 2695 7500 B14.00-3.0 14 1800 2750 8770 B16.00-3.0 16 2000 3070 11000	Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS
Warranty	12 Months unless specified otherwise	Origin	China

China Type B Horizontal Marine Air Receiver:

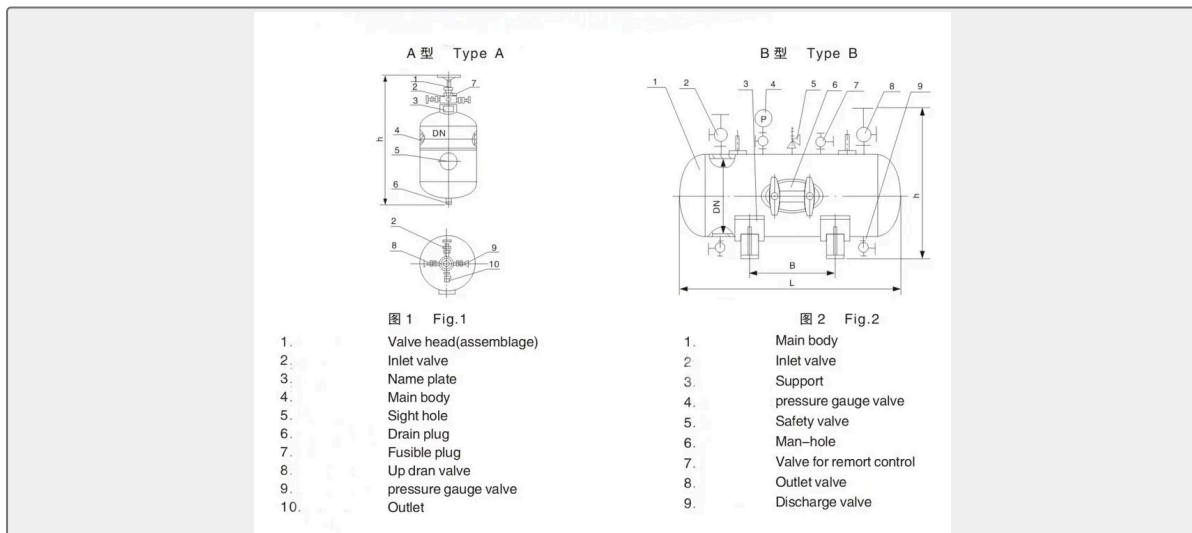

B style is made up of steel body, end, manhole for easy examination and repiar set in end, inlet/outlet valve, safety valve,

Pressure gauge and pressure gauge valve, drain valve and installation seat etc.

Main Specification:



Style	Type	Capacity(m3)	W.P. Mpa	Inner Dia mm	Height mm	Weight kg
B	B0.63-1.0	0.63	1	700	1370	480
	B0.80-1.0	0.8		700	1370	520
	B1.00-1.0	1		800	1490	685
	B0.63-3.0	0.63	3	700	1470	680
	B0.80-3.0	0.8		700	1470	780
	B1.00-3.0	1		800	1580	950
	B1.60-3.0	1.6		900	1680	1180
	B2.50-3.0	2.5		1100	1940	1925
	B4.00-3.0	4		1200	2040	3400
	B4.50-3.0	4.5		1200	2040	3750
	B5.00-3.0	5		1200	2040	4100
	B6.30-3.0	6.3		1400	2265	4230
	B8.00-3.0	8		1500	2365	4930
	B10.00-3.0	10		1600	2505	6785
	B12.00-3.0	12		1700	2695	7500
	B14.00-3.0	14		1800	2750	8770
	B16.00-3.0	16		2000	3070	11000