

# Jinbo Marine

Marine &amp; Offshore Equipment Datasheet

PRODUCT DATASHEET

## MARINE LEVEL SWITCH

## UQK-652-C Type Float Level Controller

Product Description: It is widely used in ship, chemical industry and other equipment to control and alarm the level in tank by two position type. Main Technical Specification: Top mounting.

Accura...

ISO9001 Supplier

Class Certificate

Export Supply



### Key Highlights

Category	Marine Level Switch
Standard	GB
Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

### Technical Specifications

Category	Marine Level Switch	Model / SKU	UQK-652-C-Type-Float-Level-Controller
Standard	GB	Certificate	CCS, GL, LR, BV, ABS, DNV GL, RINA, NK, KR ETC.
Warranty	12 Months unless specified otherwise	Origin	China

## CONTENTS

- Product Description:

- Main Technical Specification:

### Product Description:

It is widely used in ship, chemical industry and other equipment to control and alarm the level in tank by two position type.

### Main Technical Specification:

Top mounting.

Accuracy: <20mm



Switch TYPe :SPDT

Medium temperature:  $\leq 150\text{ }^{\circ}\text{C}$ 

Working pressure:1.0MPa

Protection:IP66 /IP68




UQK-652-C



UQK-652-C-B



UQK-652-C-Z

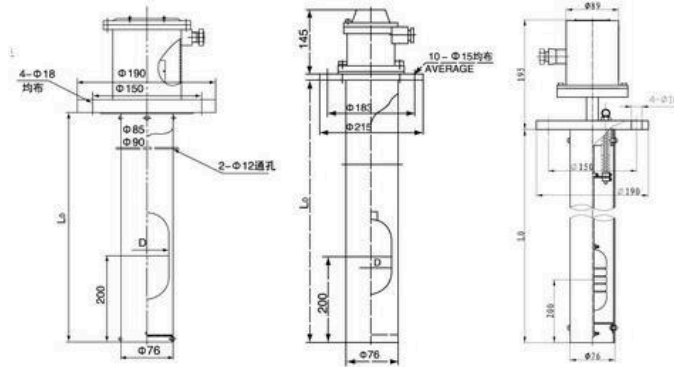

Model	Mounting type	Switch type	Switching error(mm)	Dead zone		Medium Gravity	Protective tube diameter(mm)	Float diameter(m m)
				Upper part	Lower part			
UQK-651-C UQK-651-C-B	Horizontal mounting	SPDT	20~70	---	---	0.8~1.2	---	60
UQK-652-C UQK-652-C-B	Top mounting		10~40	<150	<150		76mm	

UQK-651-C UQK-651-C-B	Flange standard	GB 2506-2005 GB/T 46-2007	Contact capacity:SPDT AC250V 10A DC125V 0.6A 2xSPDT (optional)	Exd II CT3~T6 Ex ia II CT3-T6		---	60
UQK-652-C UQK-652-C-B		651-C PN0.6 DN65 652-C PN0.6 DN80 652-B PN1.0 DN125		Range (mm) L0	300~2500mm	76mm	60



UQK-652-C Type Float Level Controller With Self Test Device

