

Jinbo Marine

Marine & Offshore Equipment Datasheet

PRODUCT DATASHEET

DRAG ANCHOR

WS MK6 Anchor

WS MK6 Anchor has 30% more high power than any drag anchors as the wilder fluke and deeper penetration and ultimate structural integrity to withstand the toughest deep-water conditions.

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Drag Anchor
Standard	DIN
Material	Steel Plate Approved by Class Society, DH36, Q345B, Q345C
Weight / Size	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS Size Table Weight A B C E F H S ...
Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.



Technical Specifications			
Category	Drag Anchor	Model / SKU	WS-MK6-Anchor
Standard	DIN	Material	Steel Plate Approved by Class Society, DH36, Q345B, Q345C
Weight / Size	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS Size Table Weight A B C E F H S 1500 2797 3059 1981 1321 641 1170 65 3000 3523 3870 2495 1664 808 1490 80 5000 4178 4602 2958 1973 958 1781 100 8000 4886 5390 3460 2308 1120 2090 120 10000 5263 5807 3728 2486 1206 2253 130 12000 5593 6171 3961 2642 1282 2394 140 15000 6025 6679 4267 2846 1381 2610 160 18000 6402 7101 4534 3025 1468 2777 170 20000 6631 7368 4696 3132 1520 2890 180 22000 6845 7625 4848 3234 1569 3002 190 25000 7143 7962 5059 3374 1637 3138 200 30000 7591 8451 5376 3586 1740 3324 210 MK6 Anchor Easy Handling MK6 Anchor Installation How to connect MK6 Anchor and Chain	Certificate	ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS	<ul style="list-style-type: none"> ■ China WS MK6 Anchor: ■ Certificate: ■ MK6 Anchor Easy Handling ■ How to connect MK6 Anchor and Chain 	<ul style="list-style-type: none"> ■ Advantage of WS MK6 Anchor ■ Size Table ■ MK6 Anchor Installation
-----------------	---	---

China WS MK6 Anchor:

WS MK6 Anchor has 30% more high power than any drag anchors as the wider fluke and deeper penetration and ultimate structural integrity to withstand the toughest deep-water conditions.

Suitable for all the soil condition and excellent stability.

We can delivery to your warehouse wherever you are.

Advantage of WS MK6 Anchor

Extreme holding power due to wider fluke and deeper penetration

Ultimate structure integrity to withstand the toughest deep water condition



Easy handling, fits most anchor racks

Accommodates the widest range of soils.

Excellent stability due to slim design and easy penetration.


Certificate:

ABS, LR, BV, GL, RINA, DNV, NK, KR, CCS


Size Table

Weight	A	B	C	E	F	H	S
1500	2797	3059	1981	1321	641	1170	65
3000	3523	3870	2495	1664	808	1490	80
5000	4178	4602	2958	1973	958	1781	100
8000	4886	5390	3460	2308	1120	2090	120
10000	5263	5807	3728	2486	1206	2253	130
12000	5593	6171	3961	2642	1282	2394	140
15000	6025	6679	4267	2846	1381	2610	160
18000	6402	7101	4534	3025	1468	2777	170
20000	6631	7368	4696	3132	1520	2890	180
22000	6845	7625	4848	3234	1569	3002	190
25000	7143	7962	5059	3374	1637	3138	200
30000	7591	8451	5376	3586	1740	3324	210


MK6 Anchor Easy Handling

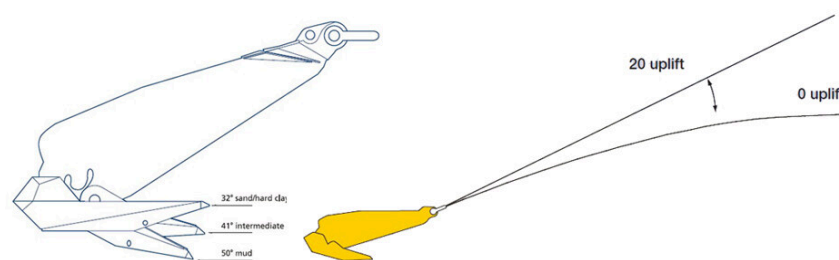

MK6 Anchor Installation

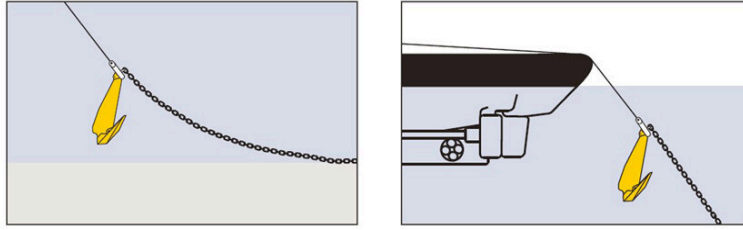

How to connect MK6 Anchor and Chain

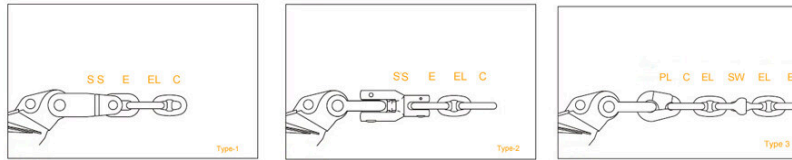

SS: Swivel Shackle E: End Link EL: Enlarged Link C: Common Link, PL: Pear Link Shackle.
SW: Swivel