PIPE FILTER

# Y Type Filter

Y type filter is pipeline coarse filter series, used for gas or other medium large particle filtering, installed on the pipeline to remove large solid impurity in the fluid, make sure the machinery and equipment (includi...

ISO9001 Supplier

Class Certificate

Export Supply



## Key Highlights

| | |
|---|---|
| **Category** | Pipe Filter |
| **Standard** | DIN |
| **Material** | L2 A3 304 304L 316 316L |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS |

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

## Technical Specifications


| | | | |
|---|---|---|---|
| **Category** | Pipe Filter | **Model / SKU** | Y-Type-Filter |
| **Standard** | DIN | **Material** | L2 A3 304 304L 316 316L |
| **Certificate** | ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS | **Warranty** | 12 Months unless specified otherwise |
| **Origin** | China | | |

**CONTENTS**

- China Y Type Filter:
- Main Specification

## China Y Type Filter:

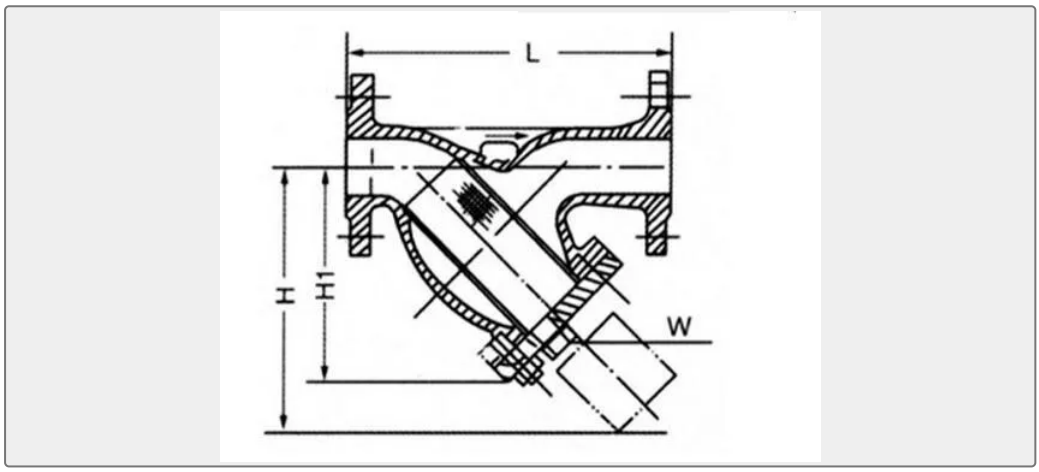


Y type filter is pipeline coarse filter series, used for gas or other medium large particle filtering, installed on the pipeline to remove large solid impurity in the fluid, make sure the machinery and equipment (including compressor, pump, etc.) work smoothly.

## Main Specification

| DN | In | L | H | H1 | Filter area m2 |
|---|---|---|---|---|---|
| 15 | 0.5 | 125 | 70 | 150 | 0.00185 |
| 20 | 0.75 | 145 | 70 | 150 | 0.00281 |
| 25 | 1 | 160 | 80 | 160 | 0.00343 |
| 32 | 1.25 | 180 | 90 | 180 | 0.00486 |
| 40 | 1.5 | 200 | 100 | 240 | 0.00767 |
| 50 | 2 | 220 | 130 | 250 | 0.0116 |
| 65 | 2.5 | 260 | 165 | 350 | 0.02111 |
| 80 | 3 | 280 | 195 | 390 | 0.03029 |
| 100 | 4 | 320 | 230 | 450 | 0.04063 |
| 125 | 5 | 350 | 300 | 520 | 0.05589 |
| 150 | 6 | 380 | 335 | 580 | 0.07709 |

| | | | | | |
|---|---|---|---|---|---|
| 200 | 8 | 495 | 420 | 690 | 0.11967 |
| 250 | 10 | 595 | 500 | 800 | 0.19155 |
| 300 | 12 | 640 | 580 | 950 | 0.26738 |
| 350 | 14 | 700 | 640 | 1150 | 0.32535 |
| 400 | 16 | 800 | 700 | 1360 | 0.40946 |
| 450 | 18 | 850 | 790 | 1480 | 0.52837 |
| 500 | 20 | 900 | 875 | 1650 | 0.65385 |