

SENSOR

ZXQ160A(C) / ZXQ200A(C) Rectifier Module

ZXQ160A(C) / ZXQ200A(C) Rectifier Module Size: Principle : Type Parameter F(AV) IFSM I2t VRRM IRRM VFM Tj Rjc VISO F-L AAA2S V mA V °C ...

ISO9001 Supplier

Class Certificate

Export Supply



jinbomarine.com

Key Highlights

Category	Sensor
Standard	ISO
Weight / Size	ZXQ160A(C) / ZXQ200A(C) Rectifier Module Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Sensor	Model / SKU	ZXQ160A-C-ZXQ200A-C-Rectifier-Module
Standard	ISO	Weight / Size	ZXQ160A(C) / ZXQ200A(C) Rectifier Module Size:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		


China ZXQ160A(C) / ZXQ200A(C) Rectifier Module:

ZXQ160A(C) / ZXQ200A(C) Rectifier Module

Size:

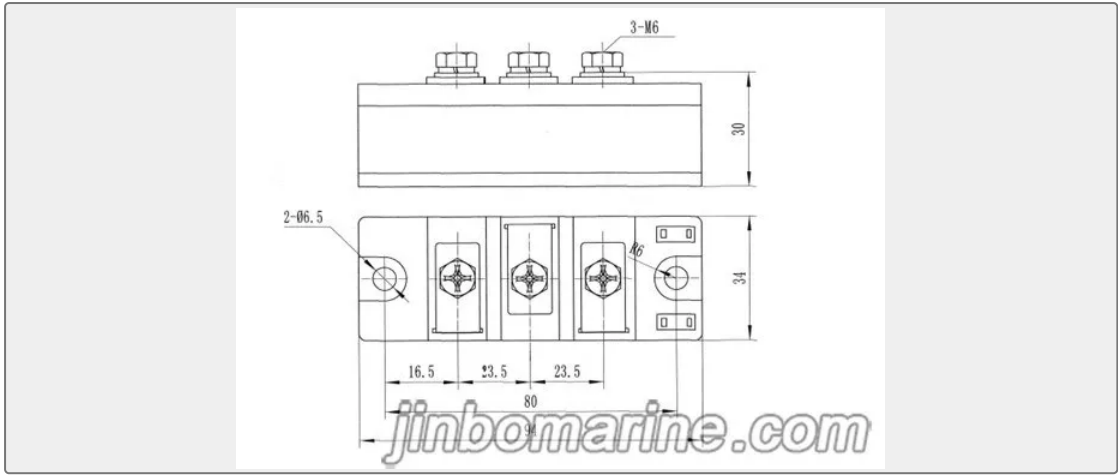

Principle :

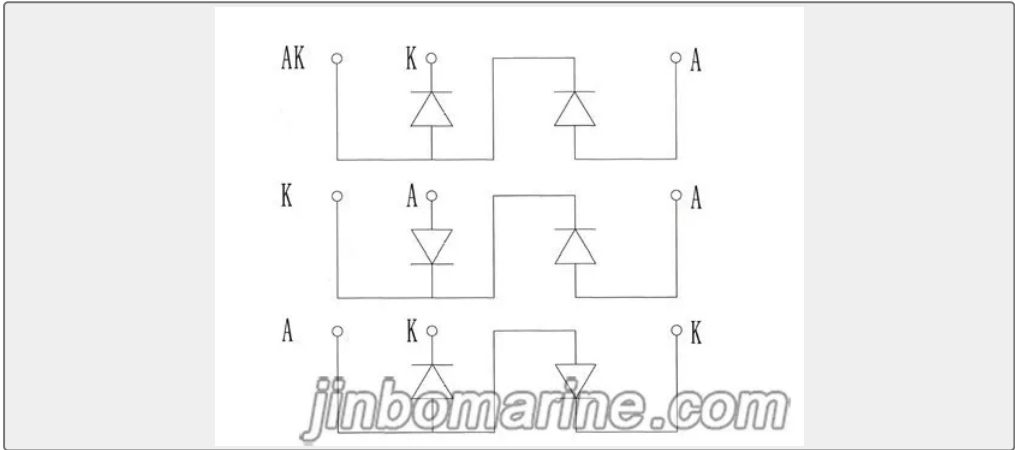

Type	Parameter										
	F(AV)	IFSM	I2t	VRRM	IRRM	VFM	Tj	Rjc	VISO	F-L	
	A	A	A2S	V	mA	V	°C	°C/W	V	Fitting Module N.m	Electrode Connection N.m

ZXQ	100	2200	24x10 3	800~1 800	≤6	≤1.65	-40~1 50	0.45	≥2500	4.5	3.5
	160	3200	60x10 3		≤8	≤1.80		0.3		4.5	4.5
	200	4000	80x10 3		≤8	≤1.80		0.2		4.5	4.5
	250	4700	120x1 03		≤10	≤1.80		0.15		4.5	10
	300	5600	160x1 03		≤10	≤1.80		0.11		4.5	10
	350	6400	220x1 03		≤10	≤2.00		0.1		4.5	10
	400	7500	280× 103		≤10	≤2.00		0.09		4.5	10
	500	9400	280× 103		≤12	≤2.00		0.065		4.5	10
	600	11000	600× 103		≤12	≤2.00		0.055		4.5	10
	700	1300 0	850× 103		≤15	≤2.00		0.05		4.5	12
	800	1500 0	1100x 103		≤15	≤2.00		0.042		4.5	12
	1000	1900 0	1800 ×103		≤15	≤2.00		0.03		4.5	12
MDC	100	1400	10x10 3		≤6	≤1.65		0.45		4.5	3.5
	160	2100	22x10 3		≤8	≤1.80		0.3		4.5	4.5
	200	2800	40x10 3		≤8	≤1.80		0.2		4.5	4.5