

MARINE TRANSFORMERS

BH-0.66TH II Nomal Size Marine Current Transformer

Transformer Definition Transformer, instrument transformer), also known as instrument transformer, current transformer and voltage transformer is a general designation to high voltage to low voltage, large current ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Marine Transformers
Standard	GB
Weight / Size	BH-0.66TH II Nomal Size Marine Current Transformer 1.Application:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Marine Transformers	Model / SKU	BH-0-66TH-II-Nomal-Size-Marine-Current-Transformer
Standard	GB	Weight / Size	BH-0.66TH II Nomal Size Marine Current Transformer 1.Application:
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS

- Transformer Definition
 - BH-0.66TH II Nomal Size Marine Current Transformer Drawing
- BH-0.66TH II Nomal Size Marine Current Transformer
 - BH-0.66TH II Nomal Size Marine Current Transformer Parameters


Transformer Definition

Transformer, instrument transformer), also known as instrument transformer, current transformer and voltage transformer is a general designation to high voltage to low voltage, large current to small current, its function is used to measure or to protect system is mainly to high voltage or high current in proportion to transform into standard low voltage (100 v) or small current (5 a or 1 a, shall mean rating), in order to achieve the standardization of measuring instrument to protect equipment and automatic control equipment, miniaturization transformer can also be used to separate the high voltage system at the same time, in order to ensure personal and equipment safety.

BH-0.66TH II Nomal Size Marine Current Transformer

- 1.Application: mainly used for electric power, electrical line voltage measurement,overload protection, intercept signal.
- 2.Working temperature: -40℃~+40℃
- 3.Rated voltage: 0..66KV
- 4.Rated frequency: 50/60 HZ
- 5.Rated primary voltage:5~10000kv
6. Rated secondary voltage: 1~5A
- 7.Rated secondary load: 2.5~50VA
- 8.Accurate level: 5P,10P
- 9:Standard: GB20840, IEC61869

BH-0.66TH II Nomal Size Marine Current Transformer Drawing

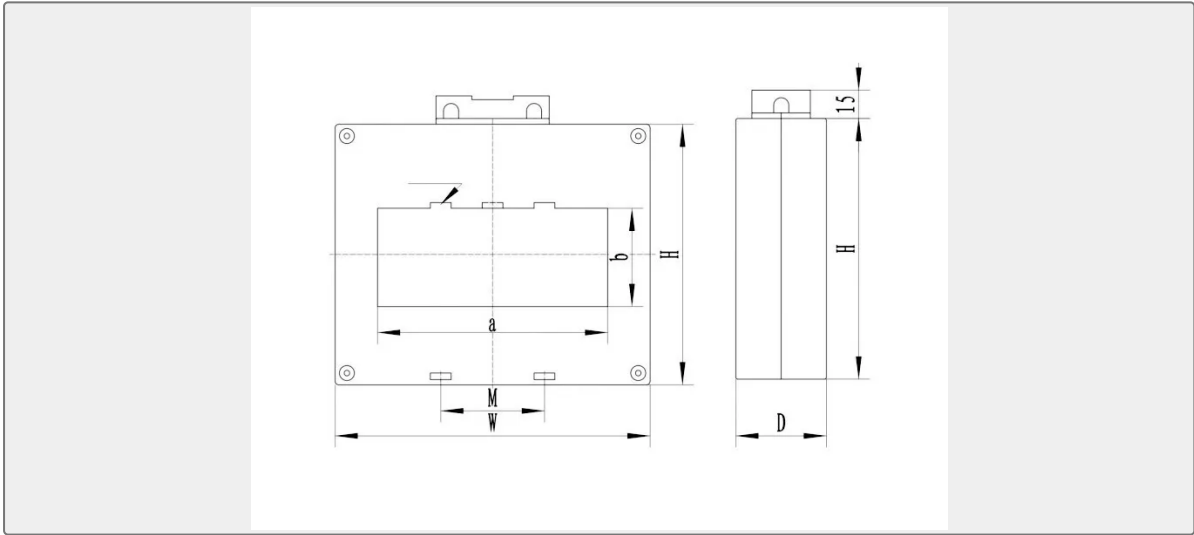

BH-0.66TH II Nomal Size Marine Current Transformer Parameters

Auxiliary Model	Overall Size			Inner Hole Size		Installation Size
	W	H	D	a	b	
30 II	59	85	45	32	31	
40 II	75	88	45	42	31	44.5
50 II	87	90	46	52	31	55
60 II	98.6	95	45.4	62	31	42

80 II	118	103.5	45	81	31	60
100 II	141	106.7	49	101.7	32	75
120 II	167	138	48	122	52	54
140 II	187	116	48	142	35	54