

CHAIN SLING

BLT082 Heavy Duty Hoist Ring

BLT082 Heavy Duty Hoist Ring Metric Thread: ITEM NO. WLL/T M Dimensional Parameters/mm ...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Chain Sling
Standard	EN
Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque /Nm Kg E A B C F G V R ...
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS


We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications

Category	Chain Sling	Model / SKU	BLT082-Heavy-Duty-Hoist-Ring
Standard	EN	Weight / Size	WLL/T M Dimensional Parameters/mm Locking Torque /Nm Kg E A B C F G V R S SW K BLTO82-M8 0.5 M8x1.25 12 33 35 30 86 56 10 17.5 6 13 10 10 0.3 BLTO82-M10 0.7 M10x1.5 15 33 35 30 86 56 10 17.5 6 13 10 10 0.3 BLTO82-M12 1 M12x1.75 20 33 35 30 86 56 10 17.5 6 13 10 15 0.3 BLTO82-M14 1.5 M14x2.0 21 50 55 44 130 85 14 27 8 19 13 30 1 BLTO82-M16 2 M16x2.0 24 50 55 44 130 85 14 27 8 19 13 50 1 BLTO82-M18 2.5 M18x2.5 26 65 66 58 162.5 109 18 34.5 10 27 16 70 2 BLTO82-M20 3 M20x2.5 30 65 66 58 162.5 109 18 34.5 10 27 16 100 2 BLTO82-M22 4 M22x2.5 33 65 66 58 162.5 109 18 34.5 10 27 16 100 2 BLTO82-M24 5 M24x3.0 36 65 66 58 162.5 109 18 34.5 10 27 16 160 2 BLTO82-M27 5.6 M27x3.0 38 87 80 76.5 218 150 27 45.5 14 34 25 200 5.5 BLTO82-M30 7.8 M30x3.5 48 87 80 76.5 218 150 27 45.5 14 34 25 500 5.6 BLTO82-M36S 9 M36x4.0 54 87 80 76.5 218 150 27 45.5 14 34 25 500 5.7
Certificate	ABS, LR, BV, DNVGL, NK, KR, IRS, RMRS, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

China BLT082 Heavy Duty Hoist Ring:

BLT082 Heavy Duty Hoist Ring

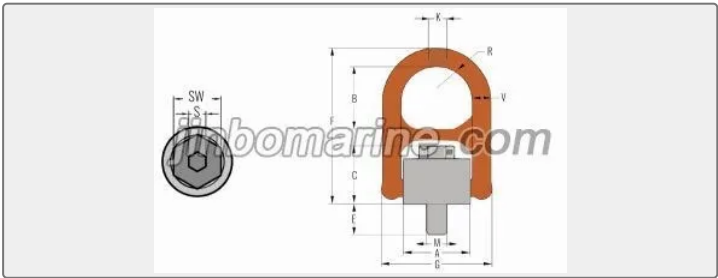

Metric Thread:

ITEM NO.	WLL/T	M	Dimensional Parameters/mm											Loc kin g Tor que /Nm	Kg
			E	A	B	C	F	G	V	R	S	S W	K		
BLTO82-M8	0.5	M8x1.25	1 2	3 3	3 5	30	86	56	1 0	17 .5	6	13	1 0	10	0.3
BLTO82-M10	0.7	M10x1.5	1 5	3 3	3 5	30	86	56	1 0	17 .5	6	13	1 0	10	0.3
BLTO82-M12	1	M12x1.75	2 0	3 3	3 5	30	86	56	1 0	17 .5	6	13	1 0	15	0.3
BLT082-M14	1.5	M14x2.0	2 1	5 0	5 5	44	13 0	85	1 4	27	8	19	1 3	30	1
BLTO82-M16	2	M16x2.0	2 4	5 0	5 5	44	13 0	85	1 4	27	8	19	1 3	50	1
BLT082-M18	2.5	M18x2.5	2 6	6 5	6 6	58	16 2. 5	10 9	1 8	34 .5	1 0	27	1 6	70	2
BLT082-M20	3	M20x2.5	3 0	6 5	6 6	58	16 2. 5	10 9	1 8	34 .5	1 0	27	1 6	100	2
BLTO82-M22	4	M22x2.5	3 3	6 5	6 6	58	16 2. 5	10 9	1 8	34 .5	1 0	27	1 6	100	2
BLT082-M24	5	M24x3.0	3 6	6 5	6 6	58	16 2. 5	10 9	1 8	34 .5	1 0	27	1 6	160	2
BLT082-M27	5.6	M27x3.0	3 8	8 7	8 0	76 .5	21 8	15 0	2 7	45 .5	1 4	34	2 5	200	5.5
BLTO82-M30	7.8	M30x3.5	4 8	8 7	8 0	76 .5	21 8	15 0	2 7	45 .5	1 4	34	2 5	500	5.6
BLTO82-M36S	9	M36x4.0	5 4	8 7	8 0	76 .5	21 8	15 0	2 7	45 .5	1 4	34	2 5	500	5.7