

IEC 60092 STANDARD CABLE (CHINA TYPE)


CJPJ95/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured)

ISO9001 Supplier

Class Certificate

Export Supply

CJPJ95/SC Cable is Galvanized Steel Wire Braided and Flame retardant Marine Power & Control Cable 0.6/1KV. Cable Construction Conductor: Tinned strand Copper. IEC 60228 Clas...

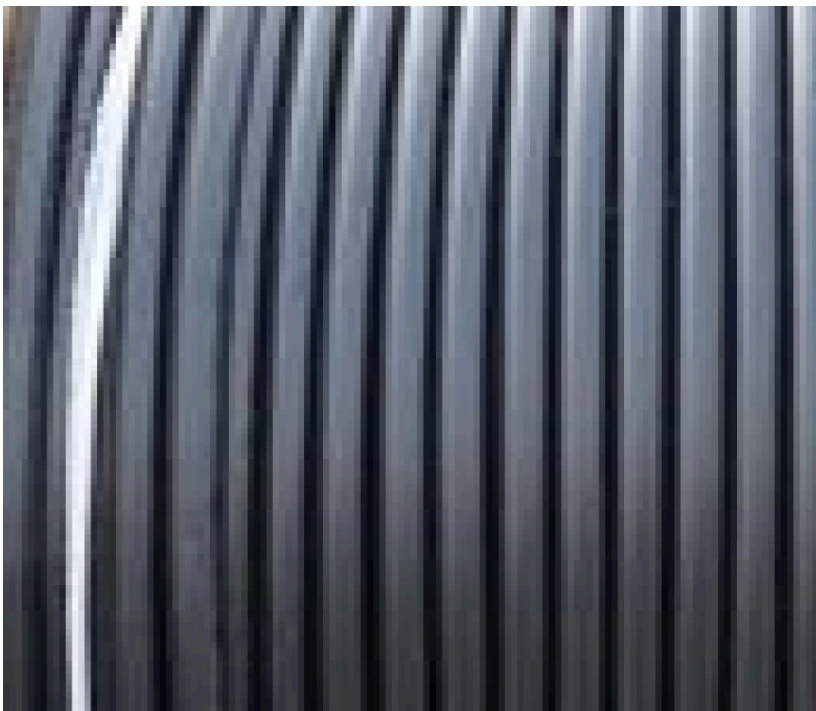

Key Highlights

Category	IEC 60092 Standard Cable (China Type)
Standard	DIN
Material	Tinned Copper/XLPE insulation/SHF2 sheath/Galvanized Steel Wire Braided/...
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.

Technical Specifications			
Category	IEC 60092 Standard Cable (China Type)	Model / SKU	CJPJ95-SC-Flame-Retardant-Marine-Power-Lighting-Cable-0-6-1KV-Armoured
Standard	DIN	Material	Tinned Copper/XLPE insulation/SHF2 sheath/Galvanized Steel Wire Braided/SHF2 sheath
Weight / Size	IEC 61034-1, IEC61034-2 Cores & Size Cores:	Surface	Galvanized
Certificate	LR, ABS,BV, GL, RINA, DNV, NK, KR, CCS	Warranty	12 Months unless specified otherwise
Origin	China		

CONTENTS	■ China CJPJ95/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured):	■ Cable Construction
	■ Standards	■ Cores & Size
	■ Features	■ Delivery

China CJPJ95/SC Flame Retardant Marine Power & Lighting Cable 0/6/1KV(Armoured):



CJPJ95/SC Cable is Galvanized Steel Wire Braided and Flame retardant Marine Power & Control Cable 0.6/1KV.

Cable Construction

Conductor: Tinned strand Copper. IEC 60228 Class 2

Insulation : XLPE Insulation

Inner Covering: Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

Armour : Galvanized Steel Wire Braided.

Outer Sheath : Halogen-free Cross Linked Thermoset Polyolefin(SHF2)

Standards

Design : IEC 60092-350, 353

Insulation Material : IEC 60092 -351

Sheath Material : IEC 60092-359

Flammability: IEC 60332-1 & IEC 60332-3 Category A

Halogen--free: IEC60754-1, IEC60754-2

Smoke Emission: IEC 61034-1, IEC61034-2

Cores & Size

Cores: 1, 2,3,4,5,7,10,12,14,16,19,24,37

Size (sqmm): 1.5, 2.5. 4, 6, 10, 16, 25, 35, 50, 70, 95, 120, 150, 180, 240, 300

Features

Halogen-free, Low Smoke, Flame retardant

Delivery

We can delivery around the world according to Incoterms 2010.