

QUICK RELEASE MOORING HOOK

Double Quick Release Mooring Hook

Brief description: It enable mooring ropes to be release fast and safely even under full load conditions. Popular model:40,60,75,100,125 and 150 tons. Type:Double mooring hook
Component:Hook,pin,...

ISO9001 Supplier

Class Certificate

Export Supply



Key Highlights

Category	Quick Release Mooring Hook
Standard	EN
Material	Including Q235-A ,Q345B, 40Cr,35Crmo.The goods can be designed according...
Weight / Size	double hooks Size chart:
Certificate	CCS,BV, ABS ,DNV,GL,LR,NDT test report etc can be provide.

We can supply according to your requirement, drawings, class certificate needs, and delivery schedule.


Technical Specifications

Category	Quick Release Mooring Hook	Model / SKU	Double-Quick-Release-Mooring-Hook
Standard	EN	Material	Including Q235-A ,Q345B, 40Cr,35Crmo.The goods can be designed according to your requirements.
Weight / Size	double hooks Size chart:	Certificate	CCS,BV, ABS ,DNV,GL,LR,NDT test report etc can be provide.
Warranty	12 Months unless specified otherwise	Origin	China

CONTENTS

■ Brief description:

■ Size chart:

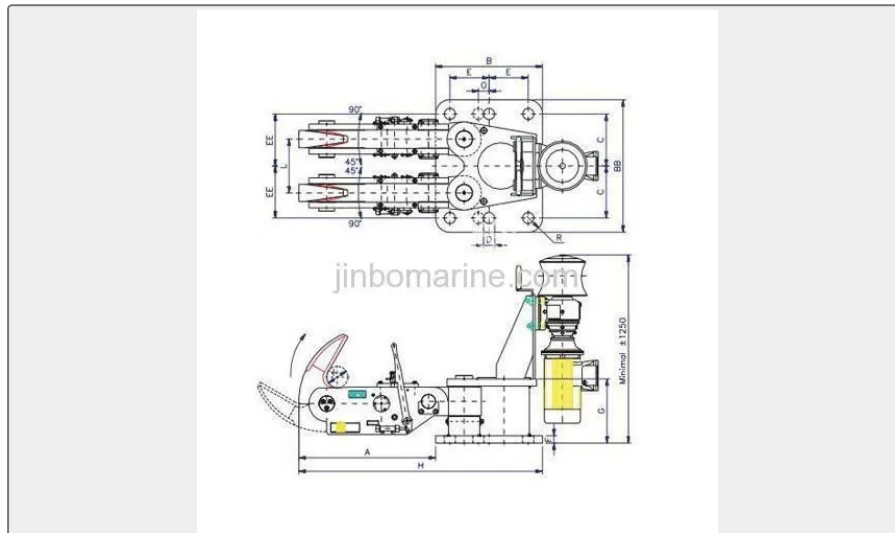

Brief description:

It enable mooring ropes to be release fast and safely even under full load conditions.

Popular model:40,60,75,100,125 and 150 tons.

Type:Double mooring hook

Component:Hook,pin,nut,plate,cylinder,cross joint,bush,bolt,handle etc.

Certificate:CCS,BV, ABS ,DNV,GL,LR,NDT test report etc can be provide.

Main technical hook:

quantity of hook body for one handle: double hooks

Size chart:

Product No.	Safe working load(Kn)	Weight(kg)	A	B	BB	C	D	E	EE	F	G	H	K	R	X
DHA-001	400	491	583	650	700	260	54	235	260	35	370	1233	96	90	6*M48
DHA-002	600	878	788	750	780	290	62	275	290	45	407	1536	130	130	6*M56

DHA-003	750	1049	888	750	850	325	70	275	325	45	417	1638	130	130	6*M64
DHA-004	1000	1439	959	750	925	363	78	275	363	50	447	1709	150	150	6*M72
DHA-005	1250	1602	1030	750	925	363	86	275	363	55	479	1780	150	150	6*M80
DHA-006	1500	2332	1210	750	1000	400	86	275	400	55	499	1960	50	150	7*M80